


21W Constant current Dip Switch-FLS Series

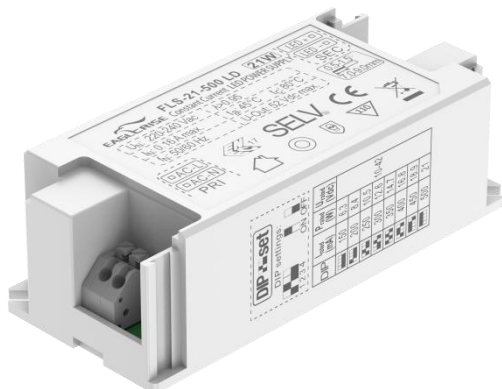

■ Approve

CE CB SELV

Features

- Class II, SELV, Built-in/Independent
- Input Voltage 220-240VAC
- Protections: SCP/OLP/OVP
- Power Factor: ≥ 0.95
- Efficiency: $\geq 85\%$
- 5 years warranty

Applications


- LED panel, Down light

◆ Description

FLS-21-500 LD is a 21W constant current LED driver with 150 to 500mA output current and a forward voltage range from 10 to 42Vdc. The output current is adjustable by DIP Switch. With it's compact dimensions from 97 x 43 x30 mm. It is easy to integrate in LED Panel and down light products. The side covers are available as accessories and allow to use the LED driver independent.

◆ Model code

FLS-21-500 LD

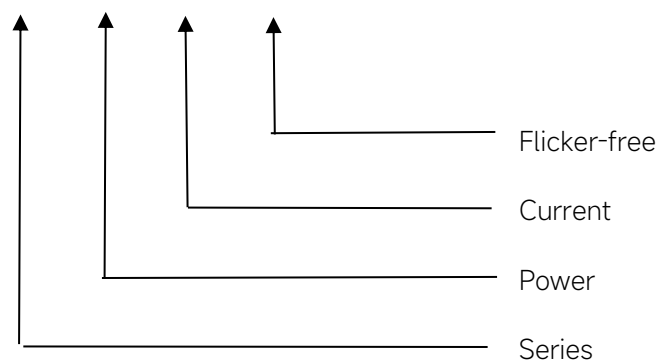

◆ Specification

Output	Constant Current	150mA	200mA	250mA	300mA	400mA	450mA	500mA	
	Voltage Range	10-42VDC							
	Unload voltage Max.	52VDC							
	Current Accuracy	±7%	±5%						
	Output HF current ripple(≥1KHz)	±5%							
	Output LF current ripple(≤120Hz)	±5%							
	SVM	≤0.4@Full Load							
	Pst	≤1@Full Load							
	Efficiency(Typ.)	≥85%@Full Load,230VAC							
Input	Rated input voltage	220-240VAC							
	Range of input voltage	176-264VAC							
	Frequency(Hz)	50/60 Hz							
	Displacement factor	≥0.9							
	Power Factor	>0.95@Full Load,230VAC							
	Input Current max	0.16A							
	Start-up time	< 0.5S							
	No Load Power	≤0.5W							
	THD (Typ.)	< 5%@Full Load,230VAC							
Protection	Over Load Protection	103-120%							
		YES/Auto Resume							
	Over Voltage Protection	> 52VDC							
		YES/Auto Resume							
Environment	Short circuit Protection	YES/Auto Resume							
	Operating Temperature	-20°C~+45°C							
	Humidity	20%-90%RH							
	Tc	80°C							
	Storage Temperature	-25°C~+60°C							
Surface	Dimension	131X43X30(LXWXH)mm							
		(Without side caps) : 97X43X30(LXWXH)mm							
standards	IEC61347- 1, IEC61347-2- 13;EN61347- 1, EN61347-2- 13;EN61347- 1, EN61347-2- 13, EN62384 EN55015, EN61000-3-2, EN61000-3-3, EN61547								
Others	ErP	EU 2019/2020							
	RoHS	RoHS (2011/65/EU) (EU)2015/863							
Note	1.All parameters not specially mentioned are measured at 240VAC input, full load and 25°C of ambient temperature. 2.Ripple & Noise are measured at 20MHz of bandwidth by using a 300mm twisted pair-wire terminated with a 0.1uF & 47 uF parallel capacitor. 3.Data are typical values obtained from test samples. 4.Switch and dimmer are not recommended to connect between this product output and luminaries.								

◆ Parameter


Number	Output				Switch position			
	Current (mA)	Voltage (VDC)	Voltage No load (VDC)	Power (W)	1	2	3	4
1	150mA	10-42V	60V	6.3W	--	--	--	--
2	200mA			8.4W	ON	--	--	--
3	250mA			10.5W	--	ON	--	--
4	300mA			12.6W	--	--	ON	--
5	350mA			14.7W	ON	--	ON	--
6	400mA			16.8W	--	ON	ON	--
7	450mA			18.9W	ON	ON	ON	--
*8	500mA			21W	ON	ON	ON	ON

* Factory default


◆ Circuit Breaker

I _{peak}	T _{width}	B10	B16	B20	C10	C16	C20
4.82A	40μs	32pcs	51pcs	64pcs	32pcs	51pcs	64pcs


◆ Wiring diagram

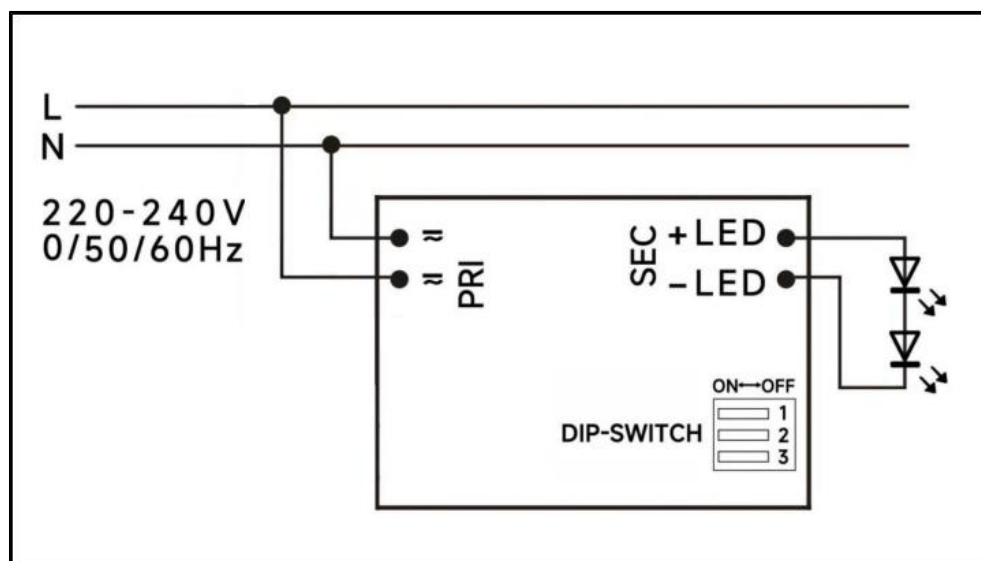

◆ 2D diagram

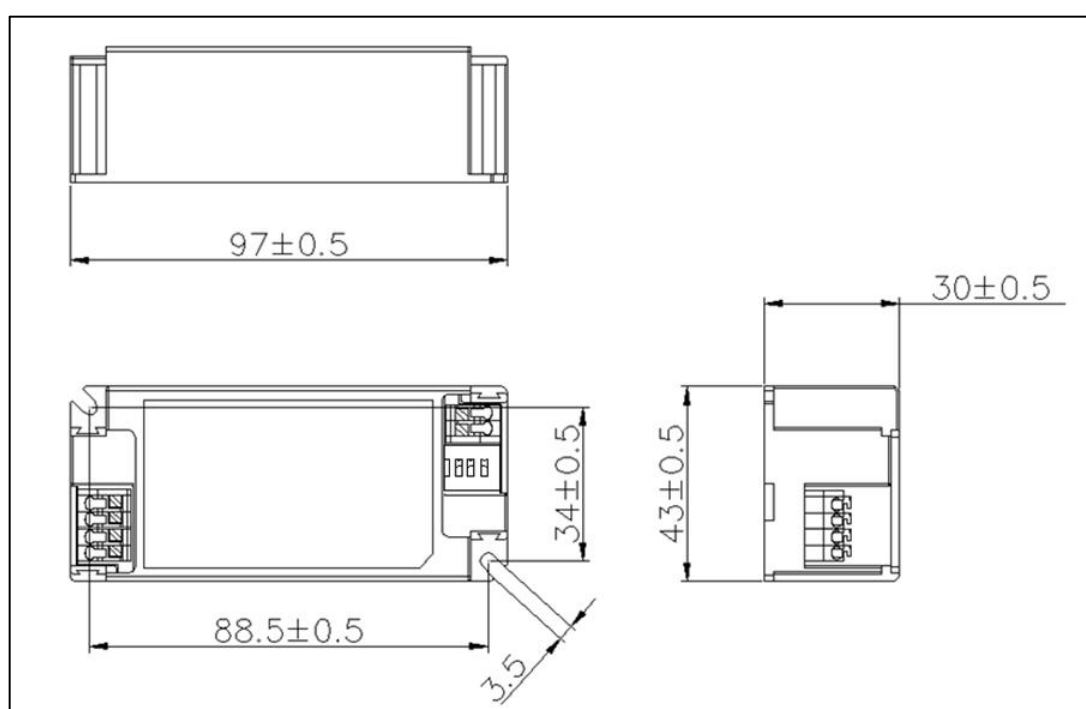

With side caps




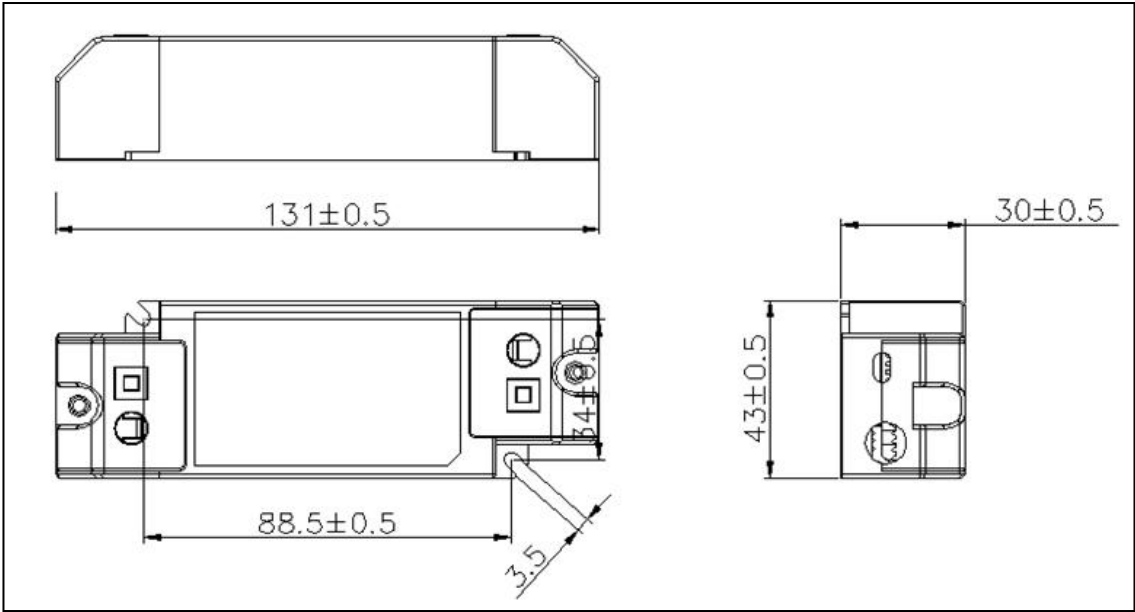


coding:1320211709


◆ Wiring & Connections

Specification item		Value (Unit)
Input	Input wire cross-section	0.5...1.5 mm ²
	Input wire gauge.	16...20 AWG
	Input wire strip length	7...9mm
Output	Output wire cross-section	0.5...1.5 mm ²
	Output wire gauge.	16...20 AWG
	Output wire strip length	7...9mm

◆ Curve for FLS-21-500 LD, $I_o=500mA$

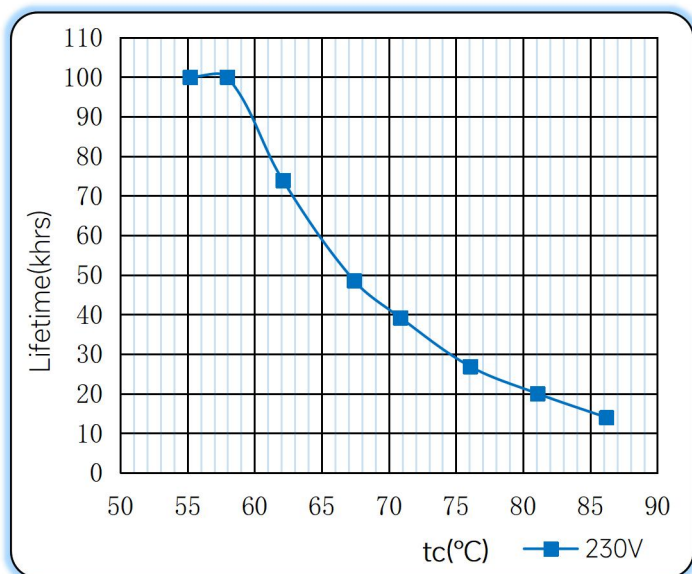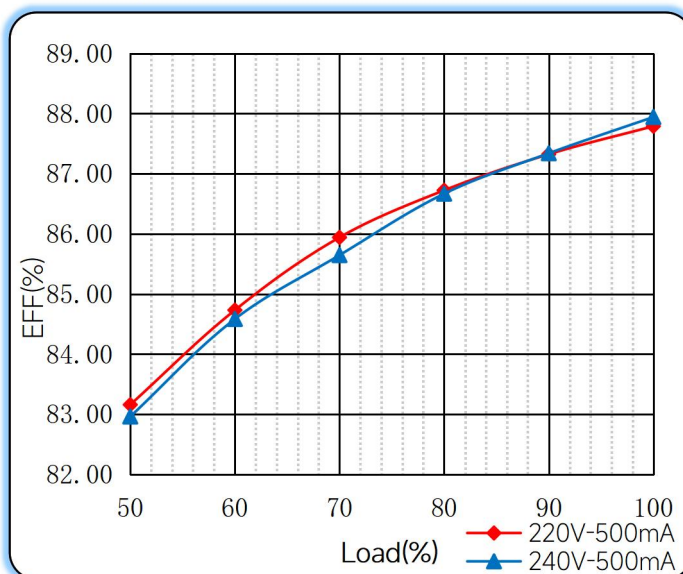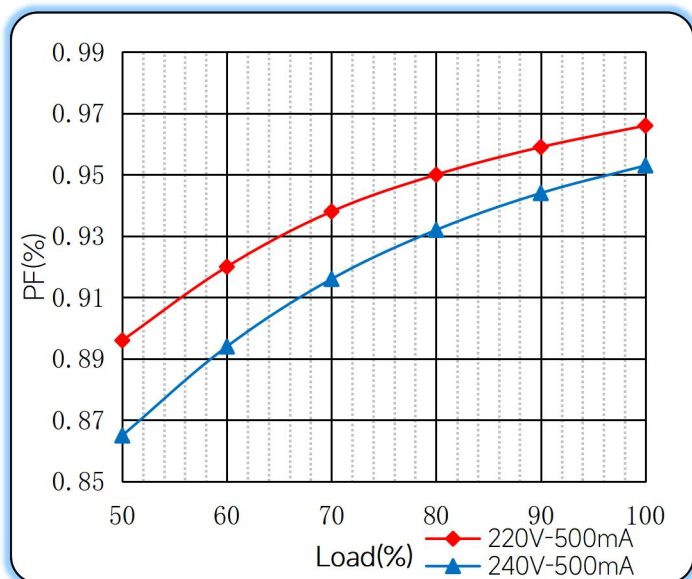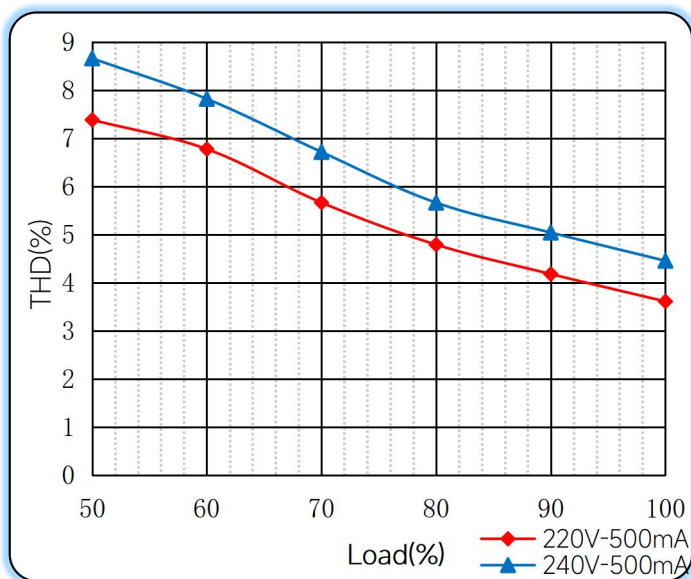Lifetime vs. Temperature Curve

Efficiency vs. Load

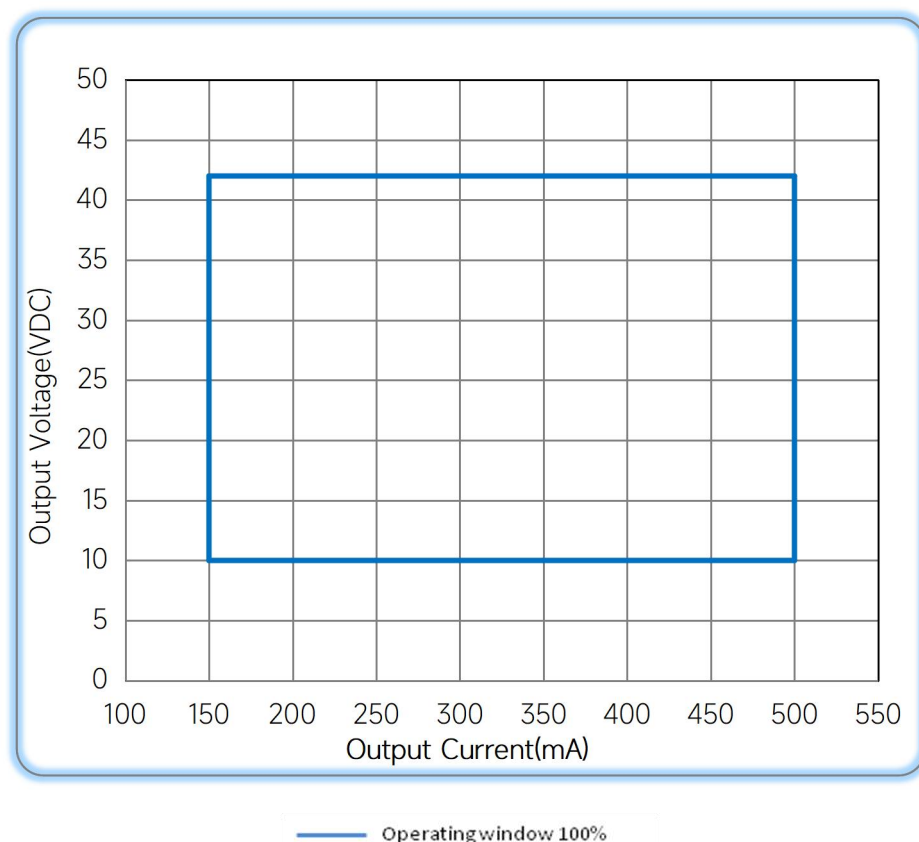Power Factor Characteristics

THD vs. Load


◆ Operating window



◆ Revision Updates

ITEM	BEFORE	AFTER	VERSION	DATE
Initial			A	2022/05/15
Specification		Updated	B	2023/04/27
Parameter		Updated	C	2023/06/24

Tel: +86-0757-86256822, +86-0757-86256831

E-mail: sales@eaglerise.com

Website : <https://lighting.eaglerise.com>



EAGLERISE



Manual