

44W DALI + PUSH Dimming power supply



■ Approve



Features

- For luminaires of protection Class I, II, SELV, built-in/independent (With side caps)
- Input Voltage 220-240VAC
- Protections: SCP/OLP/OVP/OTP
- Power Factor :0.95
- Efficiency: 87%
- Support DALI-2, Push Dimming
- 5 years warranty

Applications


- LED panel, Spot light, Down light

◆ Description

FLS-44-1050 DALI-2 LD2 is a 44W constant current LED driver with 600 to 1050mA output current and a forward voltage range from 24 to 42VDC. The output current is adjustable by DIP Switch. With it's dimensions from 97 x 43 x 30 mm it is easy to integrate in LED panel, spot and down light products. To ensure trouble-free operation, protection is provided against output short circuit and over Load.

◆ Model code

FLS-44-1050 DALI-2 LD2

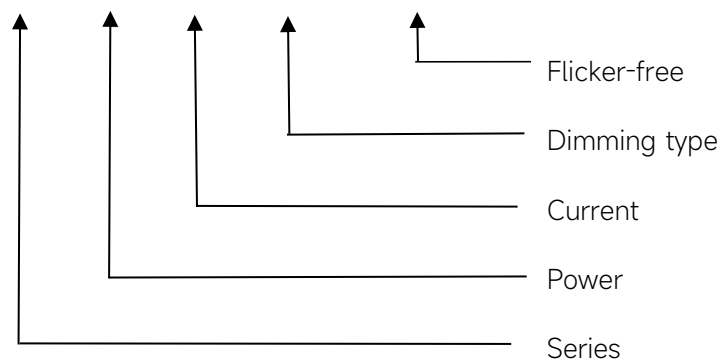

◆ Specification

| | Constant Current (mA) | 600 | 700 | 750 | 800 | 850 | 900 | 950 | 1000 | 1050 |
|-------------|----------------------------------|---|-----|-----|-----|-----|-----|-----|------|------|
| Output | Voltage Range | 24-42VDC | | | | | | | | |
| | Unload voltage Max. | 59VDC | | | | | | | | |
| | Current Accuracy | ±5% | | | | | | | | |
| | Output HF current ripple(≥1KHz) | ±5% | | | | | | | | |
| | Output LF current ripple(≤120Hz) | ±3% | | | | | | | | |
| | SVM | ≤0.01 | | | | | | | | |
| | P _{st} | ≤0.04 | | | | | | | | |
| | Flicker index | 0.002 | | | | | | | | |
| | Efficiency(Typ.) | 87% | | | | | | | | |
| Input | Rated input voltage | 220-240VAC | | | | | | | | |
| | Range of input voltage | 198-264VAC | | | | | | | | |
| | Range of input voltage(DC) | 198-280VDC | | | | | | | | |
| | Frequency(Hz) | 0/50/60 Hz | | | | | | | | |
| | Displacement factor | ≥0.9 | | | | | | | | |
| | Power Factor | >0.95 | | | | | | | | |
| | Input Current | 0.25A max. | | | | | | | | |
| | Start-up time | < 0.7S | | | | | | | | |
| | No Load Power | ≤0.5W | | | | | | | | |
| | Standby Power | ≤0.5W | | | | | | | | |
| | Network standby power | ≤0.5W | | | | | | | | |
| | THD (Typ.) | 6% | | | | | | | | |
| Dimming | Dimming | YES | | | | | | | | |
| | Dimming mode | DALI-2 (IEC 62386-101,102,207) & Push Dimming (Corridor Function) | | | | | | | | |
| | Dimming depth | 1% | | | | | | | | |
| | Dimming current range | 1 ~100% | | | | | | | | |
| Protection | Over Load Protection | 103-120% | | | | | | | | |
| | | YES/Latch off | | | | | | | | |
| | Over Voltage Protection | > 59VDC | | | | | | | | |
| | | YES/Latch off | | | | | | | | |
| | Short circuit Protection | YES/Auto Resume | | | | | | | | |
| | Open circuit Protection | YES/Auto Resume | | | | | | | | |
| Environment | Over Temperature Protection | YES/Auto Resume | | | | | | | | |
| | Operating Temperature | -20°C~+50°C | | | | | | | | |
| | Humidity | 20%-90%RH | | | | | | | | |
| | T _c | 90°C | | | | | | | | |
| | Storage Temperature | -40°C~+80°C | | | | | | | | |
| | Lifetime | >50000h,@T _c =90°C | | | | | | | | |

| | | |
|-----------|--|--|
| Surface | Dimension | 97X43X30mm (With side caps :131X43X30mm) |
| Standards | EN 61347-1,EN 61347-2-13;EN IEC 55015,EN IEC 61000-3-2,EN 61000-3-3;EN 61547 | |
| Others | Surge | L-N:1kV, Conforms to class C |
| | ErP | EU 2019/2020 |
| | RoHS | RoHS (2011/65/EU) (EU)2015/863 |
| Note | 1.All parameters NOT specially mentioned are measured at 230VAC input , full load and 25°C of ambient temperature. 2.Ripple & Noise are measured at 20MHz of bandwidth by using a 300mm twisted pair-wire terminated with a 0.1uF & 47 uF parallel capacitor. 3.Temperature test: tested at high temperature(50°C)/low temperature(-20°C)/normal temperature(25°C) 4.Data are typical values obtained from test samples | |

◆ Parameter

| Number | Output | | | | Switch position | | | |
|--------|-------------|---------------|-----------------------|-----------|-----------------|----|----|----|
| | Current(mA) | Voltage (VDC) | Voltage No load (VDC) | Power (W) | 1 | 2 | 3 | 4 |
| 1 | 600 | 24-42VDC | 59VDC | 25.2 | ON | ON | ON | -- |
| 2 | 700 | | | 29.4 | -- | -- | -- | ON |
| 3 | 750 | | | 31.5 | ON | -- | -- | ON |
| 4 | 800 | | | 33.6 | -- | ON | -- | ON |
| 5 | 850 | | | 35.7 | ON | ON | -- | ON |
| 6 | 900 | | | 37.8 | -- | -- | ON | ON |
| 7 | 950 | | | 39.9 | ON | -- | ON | ON |
| 8 | 1000 | | | 42 | -- | ON | ON | ON |
| *9 | 1050 | | | 44.1 | ON | ON | ON | ON |


* Factory default

Refer to the test standard of RZB, there is 5 °C tolerance on the heat insulating test result


◆ Circuit Breaker

| Ipeak | Twidth | B10 | B16 | B20 | C10 | C16 | C20 |
|-------|--------|-------|-------|-------|-------|-------|-------|
| 4.82A | 40μs | 32pcs | 51pcs | 64pcs | 32pcs | 51pcs | 64pcs |



◆ Wiring diagram

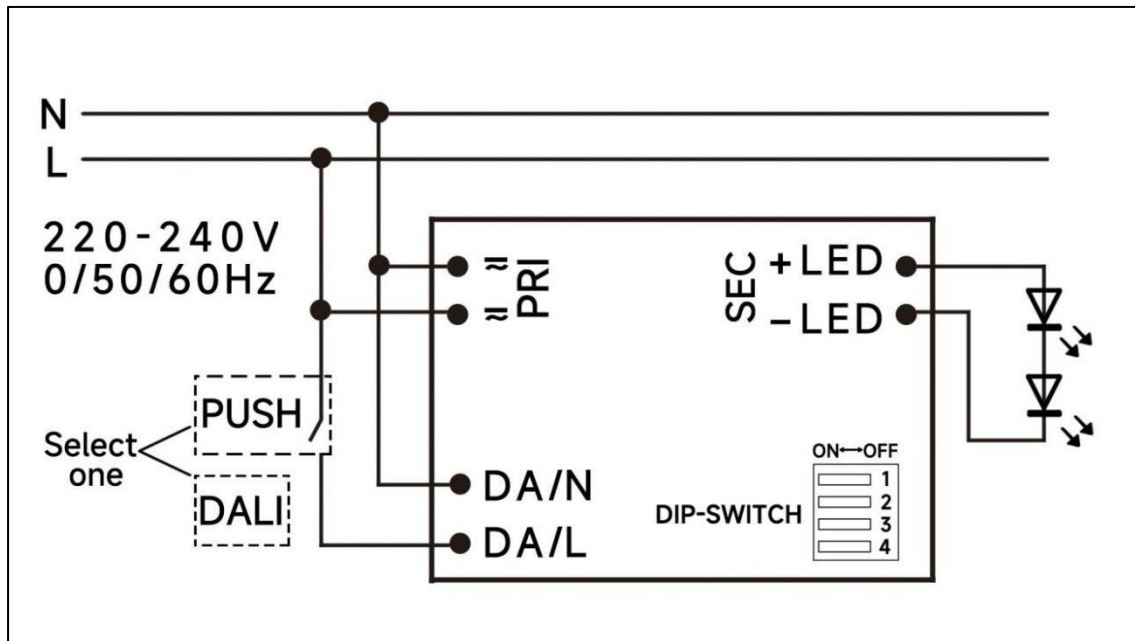

◆ 2D diagram

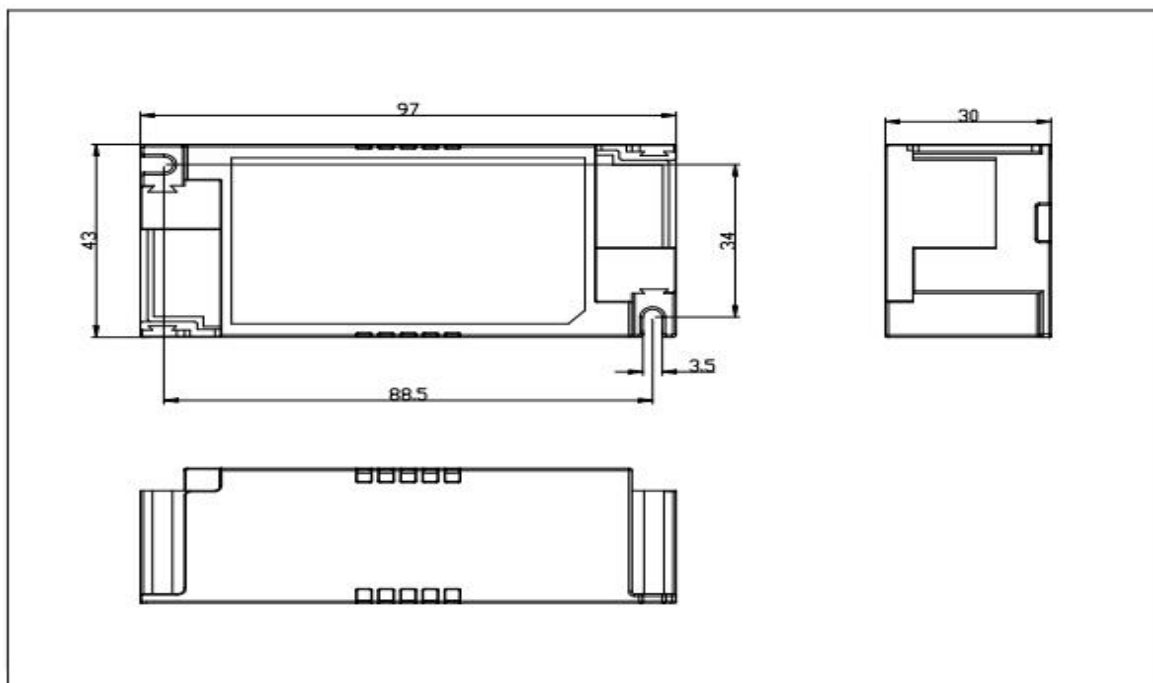

With side caps

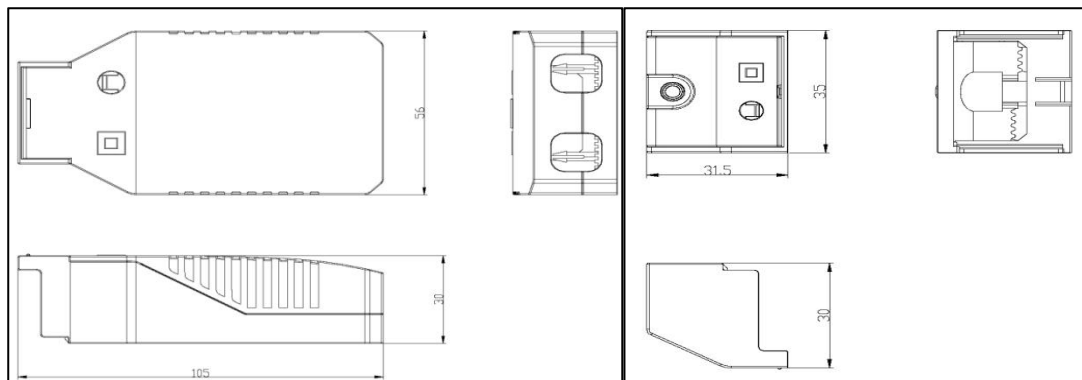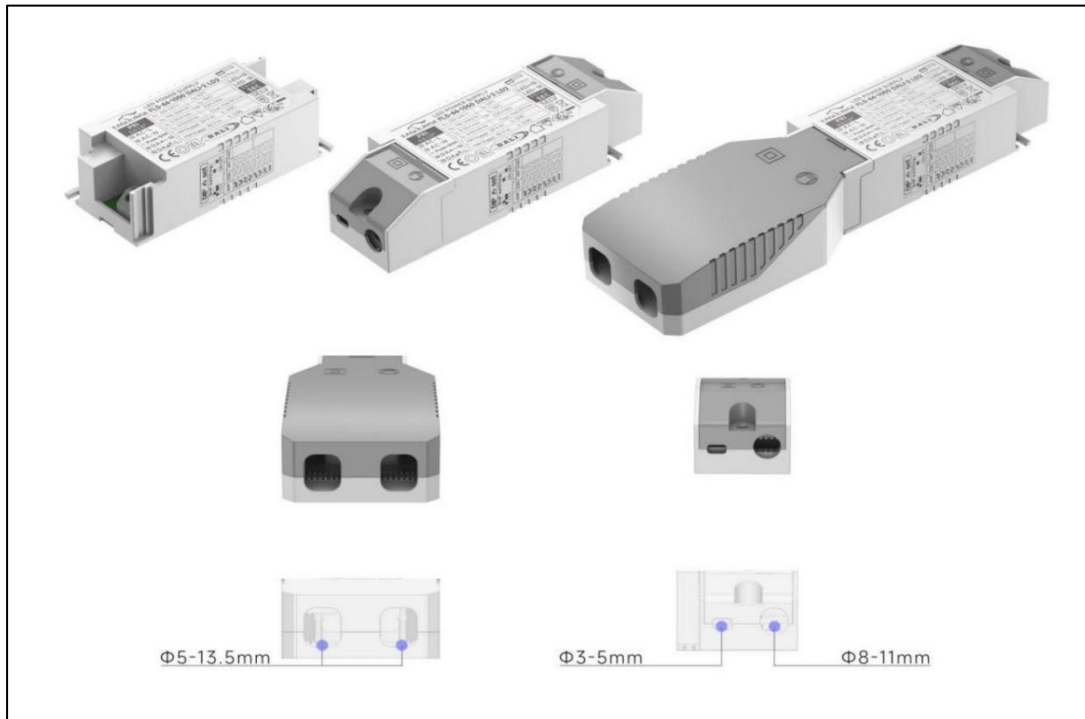

A caps

B caps

◆ Wiring & Connections


| | Specification item | Value (Unit) |
|--------|---------------------------|---|
| Input | Input wire cross-section | 0.5...1.5 mm ² (With A side caps: 0.75...2.5 mm ²) |
| | Input wire gauge. | 16...20 AWG (With A side caps: 14...20 AWG) |
| | Input wire strip length | 7...9mm |
| Output | Output wire cross-section | 0.5...1.5 mm ² |
| | Output wire gauge. | 16...20 AWG |
| | Output wire strip length | 7...9mm |

Common ways of wire clamping:


1. Tighten the screws to secure the side cover or clips, to clamp the cables
2. Through the main shell and side cover side teeth to clamp the cables

◆ Curve for FLS-44-1050 DALI-2 LD2, $I_o=1050\text{mA}$


Lifetime vs. Temperature Curve

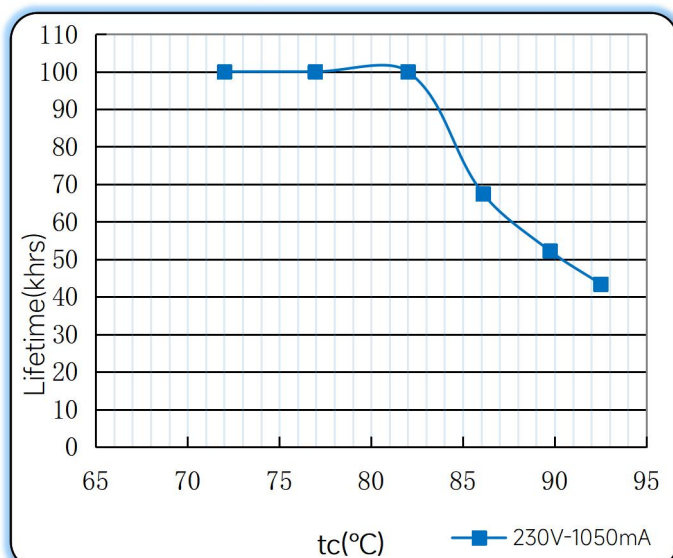


Efficiency vs. Load

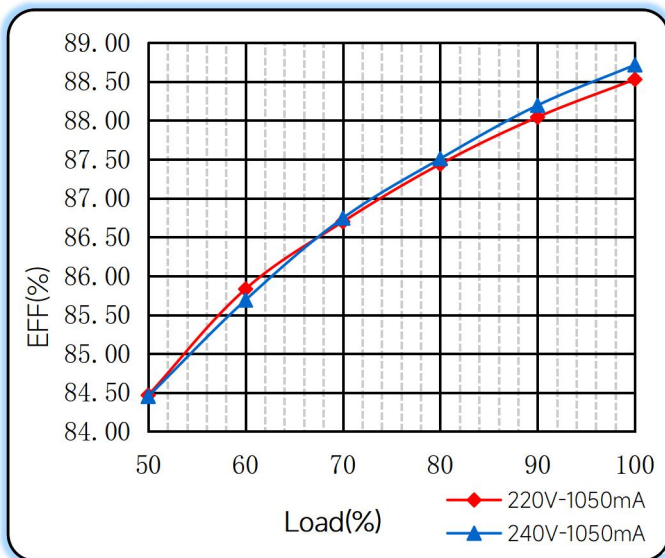

Power Factor Characteristics

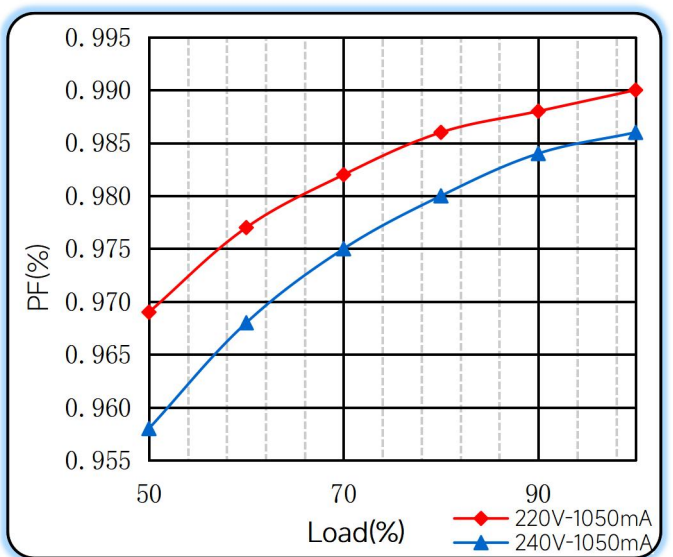

THD vs. Load

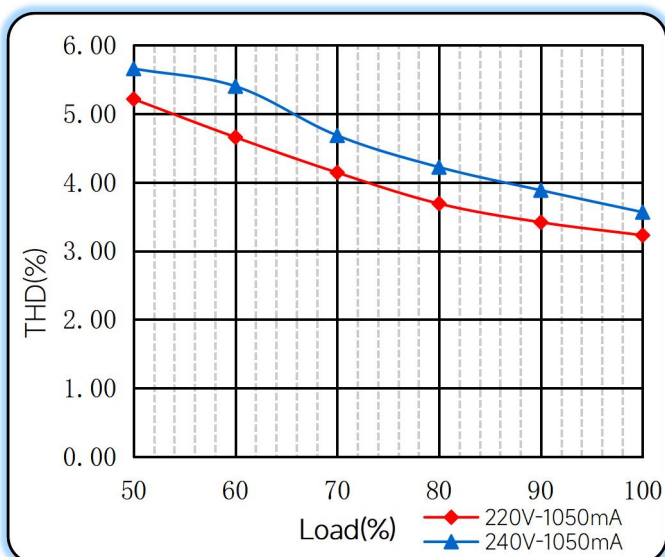


◆ Push dimming operation

| Action | Action duration | Function |
|--------------------------|-----------------|---|
| Short push | <0.5s | Turn on/off |
| Short push twice | <0.5s | LED on: Save current brightness level LED off: Delete saved level and turn on at 100% brightness |
| Short push five times | <0.5s | Quit Corridor mode |
| Long push | 0.5-14s | Dimming up or down |
| Long push | 15s-2mins | Sync all LEDs to be 100% brightness |
| Long push | >2mins | Enter Corridor mode - LED keep 100% brightness for 2mins. Then brightness will turn to be 10% within 32s if no action during 2mins 100% brightness. |

Note:


- 1.The factory default brightness is at 100%.
- 2.Up to 30 drivers can perform the PUSH dimming at the same time when utilizing one common push button
- 3.The maximum length of the cable from the push button to the last driver is 200 meters.

◆ Corridor mode

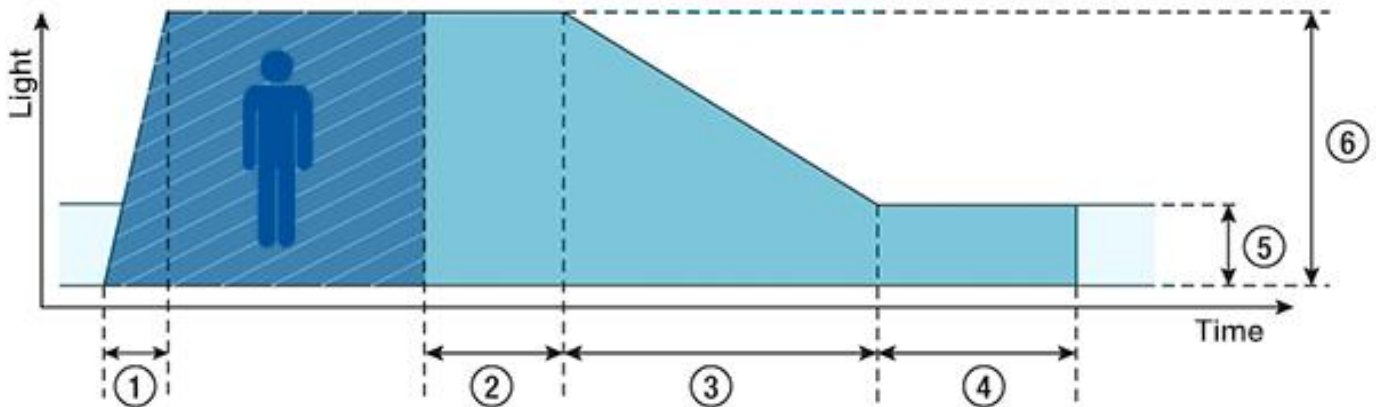

- ◆ **Fade-in time(0.5s):** the time that starts as soon as the presence of a person is detected. During the fade-in time the luminous intensity is faded up to the presence value.
- ◆ **Run-on time(120s):** the time that starts as soon as the presence of a person is no longer detected. If the presence of a person is detected again during the run-on time the run-on time is restarted from zero. If no presence is detected during the run-on time the fade time is started as soon as the run-on time expires.
- ◆ **Fade time(32s):** the time during which the luminous intensity is faded from the presence value to the absence value.
- ◆ **Switch-off delay (Never Off):** the time during which the absence value is held before the lighting is switched off. Depending on the profile selected the switch-off delay may have different values or may not be defined.
- ◆ **Absence value(default: 10 %):** the luminous intensity when there is no person present.
- ◆ **Presence value (default: 100 %):** the luminous intensity when persons are present.

◆ Operating window

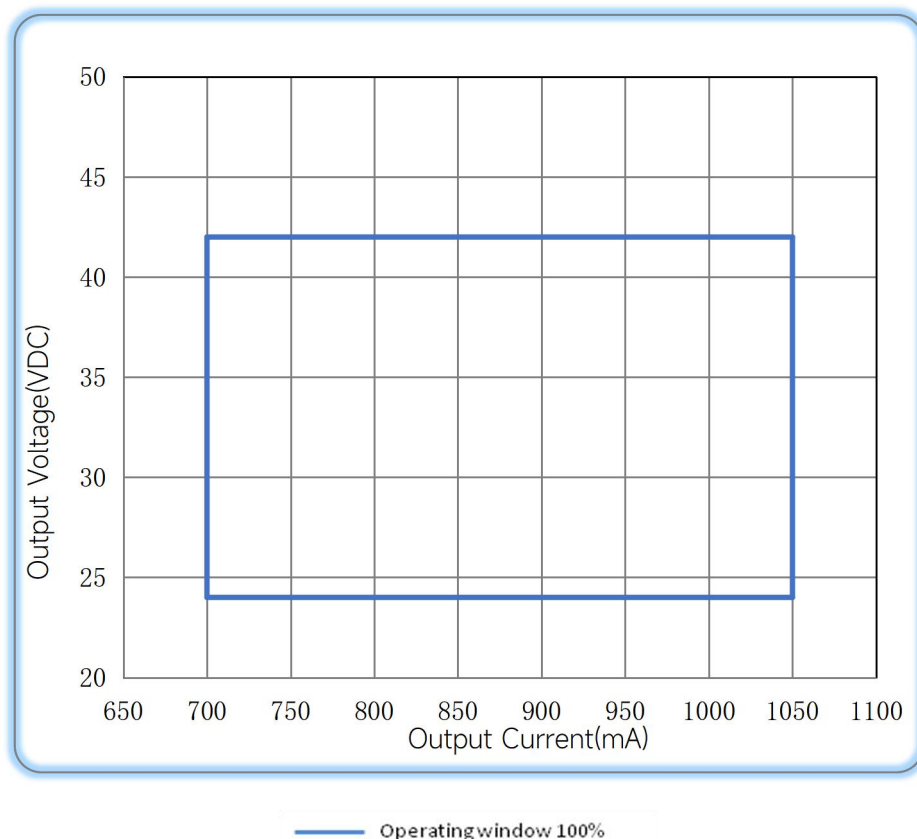

◆ Revision Updates

| ITEM | BEFORE | AFTER | VERSION | DATE |
|---------------|--------|----------------------------|---------|------------|
| Start-up time | 0.5S | 0.7S | A | 2022/08/12 |
| | | Heat insulating test added | B | 2022/12/12 |

Tel: +86-0757-86256822, +86-0757-86256831

E-mail: sales@eaglerise.com

Website : <https://lighting.eaglerise.com>



EAGLERISE



Manual