


60W DALI+PUSH Dimming power supply

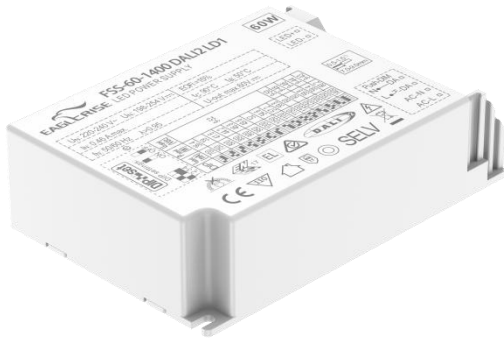

Features

- Class II, SELV, Built-in/Independent
- Input Voltage 220-240VAC
- Protections: SCP/OLP/OVP/OTP
- Power Factor : >0.95@Full load,230V
- Efficiency : 88%@Full load,230V
- Support DALI-2, Push Dimming
- 5 years warranty

Applications


- LED panel,down light,spot light

◆ Description

FSS-60-1400 DALI2 LD1 is a 60W constant current LED driver with 700 to 1400mA output current and a forward voltage range from 9 to 52Vdc. The output current is adjustable by DIP Switch. With it's dimensions from 110 x 74 x 30 mm. It is easy to integrate in LED Panel, spot and down light products. To ensure trouble-free operation, protection is provided against output short circuit and over Load.

◆ Model code

FSS-60-1400 DALI2 LD1

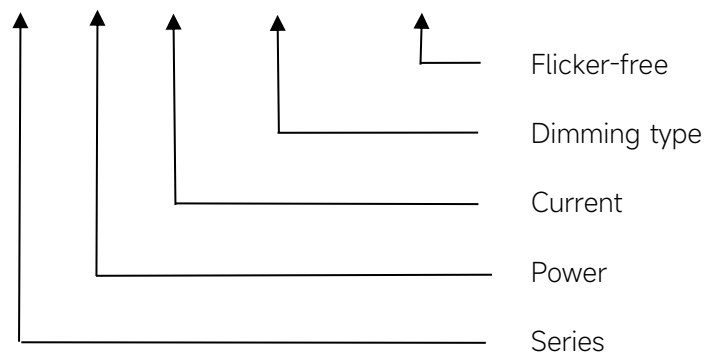

◆ Specification

Output	Constant Current (mA)	700	750	800		1150	1200	1250	1300	1350	1400
	Voltage Range (VDC)	9-52					9-50	9-48	9-46	9-44	9-43
	Unload voltage Max.	60VDC									
	Current Accuracy	±5%									
	Output HF current ripple(≥1KHz)	±10%									
	Output LF current ripple(≤120Hz)	±3%									
	SVM	≤0.4									
	P _{st}	≤1									
	Efficiency(Typ.)	88%@Full load,230V									
Input	Rated input voltage	220-240VAC									
	Range of input voltage	198-264VAC									
	Rated input voltage(DC)	198-280VDC									
	Frequency(Hz)	0/50/60 Hz									
	Displacement factor	≥0.9									
	Power Factor	>0.95@Full load,230V									
	Input Current	0.46A									
	Start-up time	< 0.7S									
	No Load Power	≤0.5W									
	Standby Power	≤0.5W									
	THD (Typ.)	<10%@Full Load,230VAC									
Dimming	Dimming	YES									
	Dimming mode	DALI-2 (IEC 62386-101,102,207) & Push Dimming (Corridor Function)									
	Dimming depth	1%									
	Dimming current range	1 ~100%									
Protection	Over Load Protection	103-120%									
		YES/Latch off									
	Over Voltage Protection	> 60VDC									
		YES/Latch off									
	Short circuit Protection	YES/Latch off									
Environment	Over Temperature Protection	YES/Auto Resume									
	Operating Temperature	-20°C~+50°C									
	Humidity	20%-90%RH									
	T _c	90°C									
	Storage Temperature	-40°C~+80°C									
Surface	Lifetime	>50000h,@T _c =85°C									
	Dimension	110X74X30mm (With side caps : 160X74X30mm)									

Standards	IEC61347- 1, IEC61347-2- 13;EN61347- 1, EN61347-2- 13;EN61347- 1, EN61347-2- 13, EN62384;GB/T17743;EN61547 GB 19510.1,GB 19510.14;GB/T 17743,GB 17625.1;EN IEC 55015,EN IEC 61000-3-2,EN 61000-3-3	
Others	ErP	EU 2019/2020
	RoHS	RoHS (2011/65/EU) (EU)2015/863
Note	1.All parameters not specially mentioned are measured at 230VAC input , full load and 25°C of ambient temperature. 2.Ripple & Noise are measured at 20MHz of bandwidth by using a 300mm twisted pair-wire terminated with a 0.1uF & 47 uF parallel capacitor. 3.Data are typical values obtained from test samples. 4.Switch and dimmer are not recommended to connect between this product output and luminaries.	

◆ Parameter


Number	Output	Switch position			
	Current(mA)	1	2	3	4
1	700	ON	--	--	--
2	750	--	ON	--	--
3	800	ON	ON	--	--
4	850	--	--	ON	--
5	900	ON	--	ON	--
6	950	--	ON	ON	--
7	1000	ON	ON	ON	--
8	1050	--	--	--	ON
9	1100	ON	--	--	ON
10	1150	--	ON	--	ON
11	1200	ON	ON	--	ON
12	1250	--	--	ON	ON
13	1300	ON	--	ON	ON
14	1350	--	ON	ON	ON
15*	1400	ON	ON	ON	ON

* Factory default


◆ Circuit Breaker

Ipeak	Twidth	B10	B16	B20	C10	C16	C20
5.88A	32.4μs	40pcs	64pcs	80pcs	40pcs	64pcs	80pcs


◆ Wiring diagram

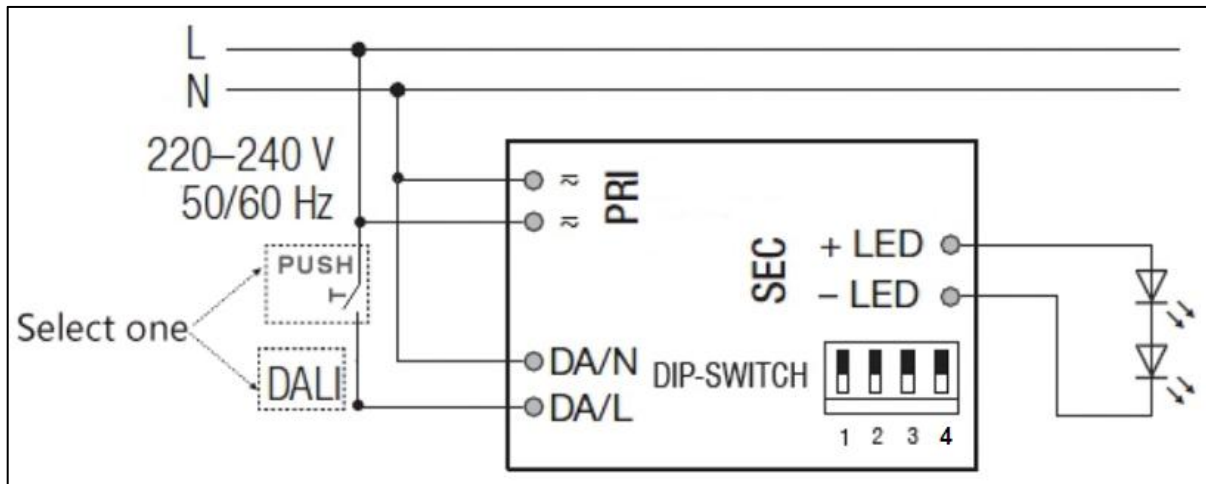

◆ 2D diagram

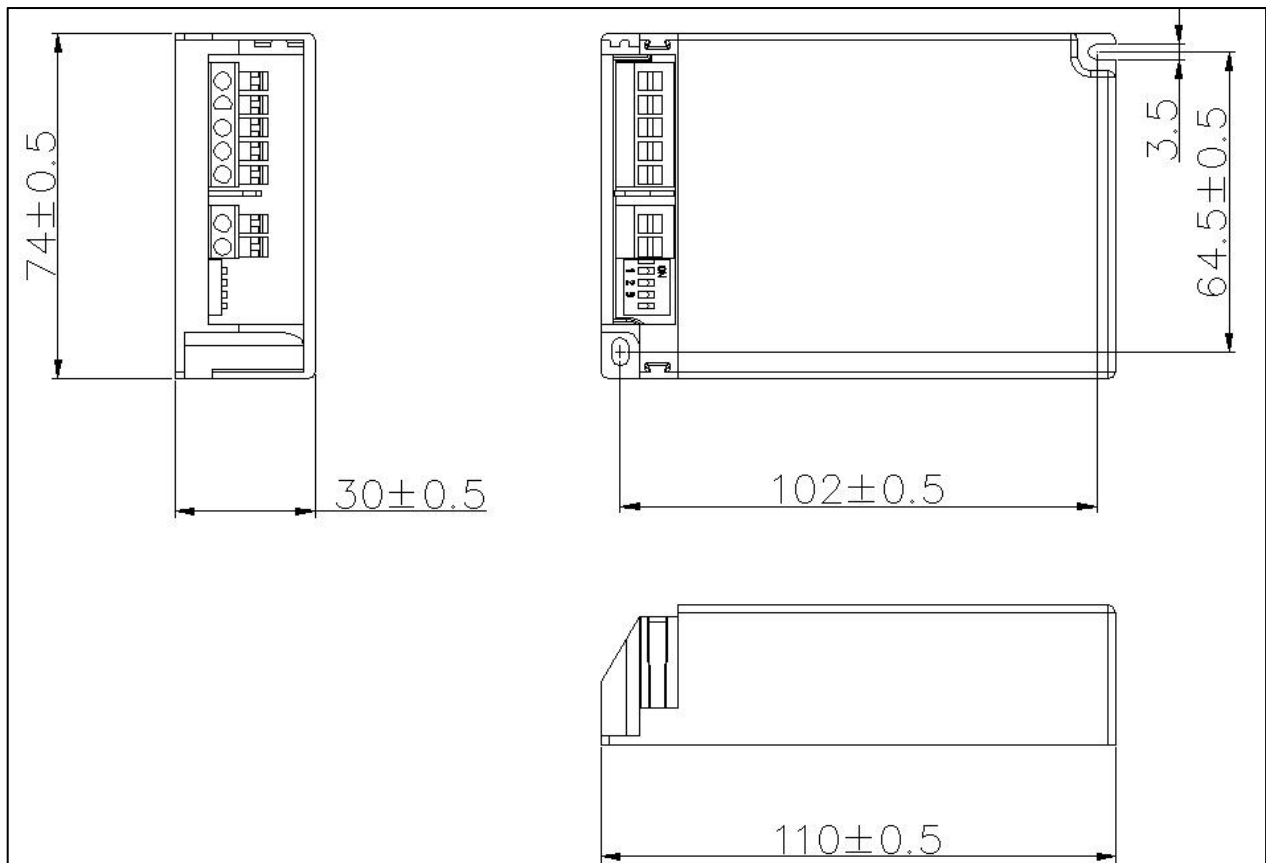

With side caps




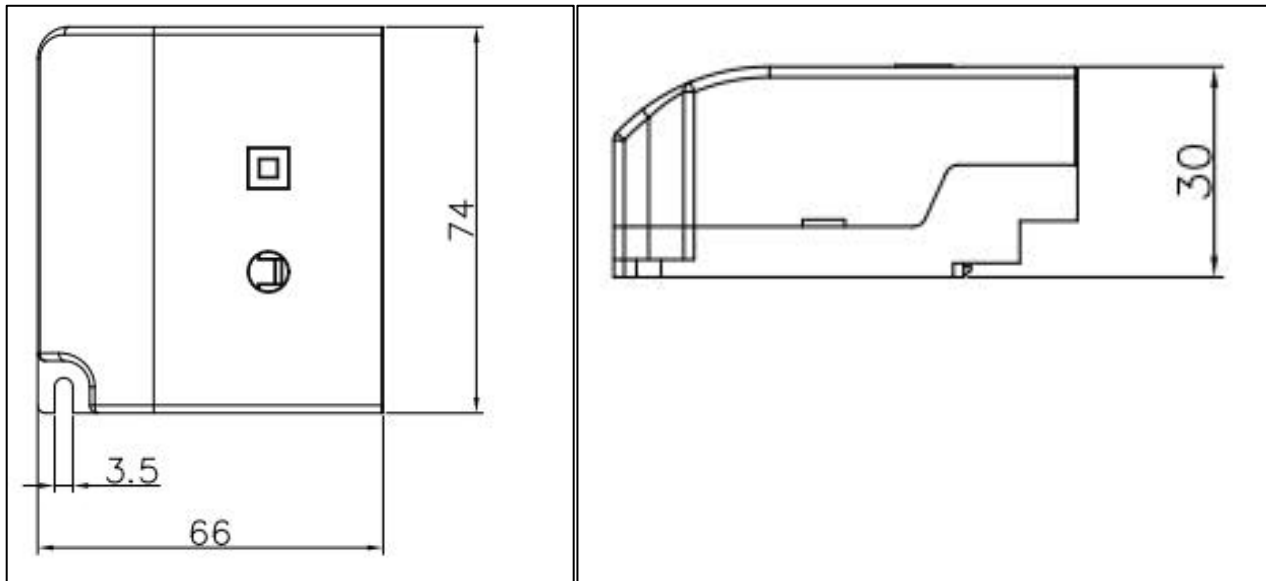


coding:1320211998-1

◆ Wiring & Connections

Specification item		Value (Unit)
Input	Input wire cross-section	0.5...1.5 mm ²
	Input wire gauge.	16...20 AWG
	Input wire strip length	7...9mm
Output	Output wire cross-section	0.5...1.5 mm ²
	Output wire gauge.	16...20 AWG
	Output wire strip length	7...9mm

◆ Curve for FSS-60-1400 DALI-2 LD1, $I_o=1400\text{mA}$

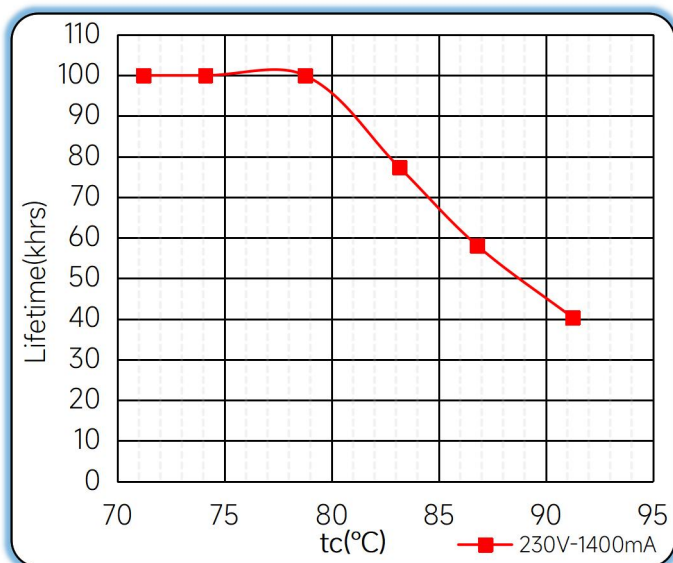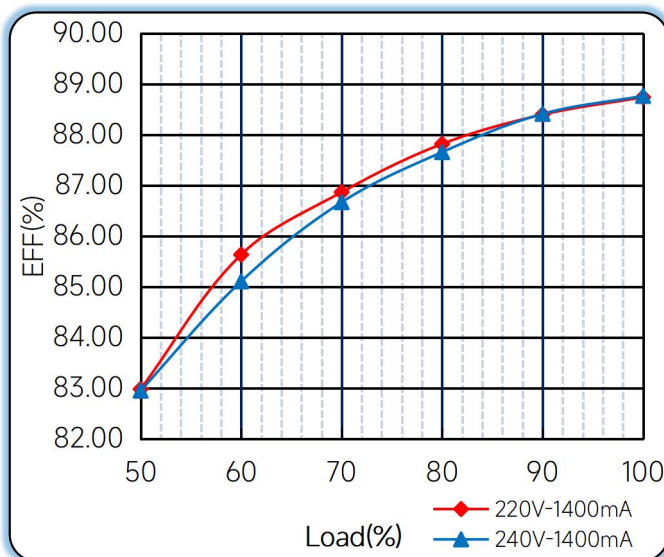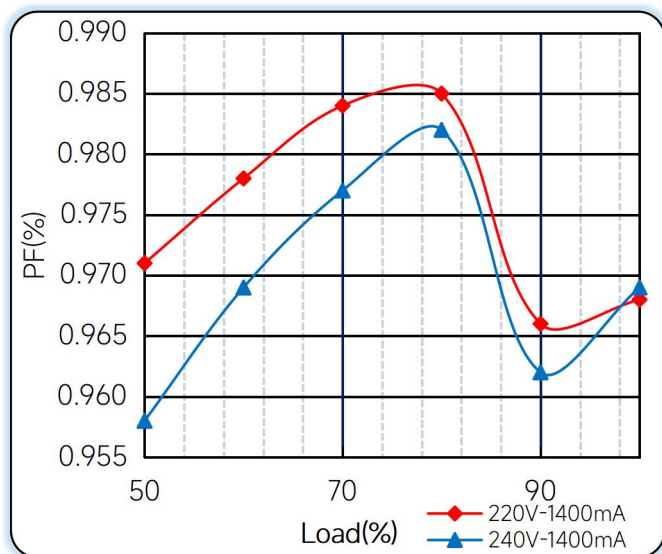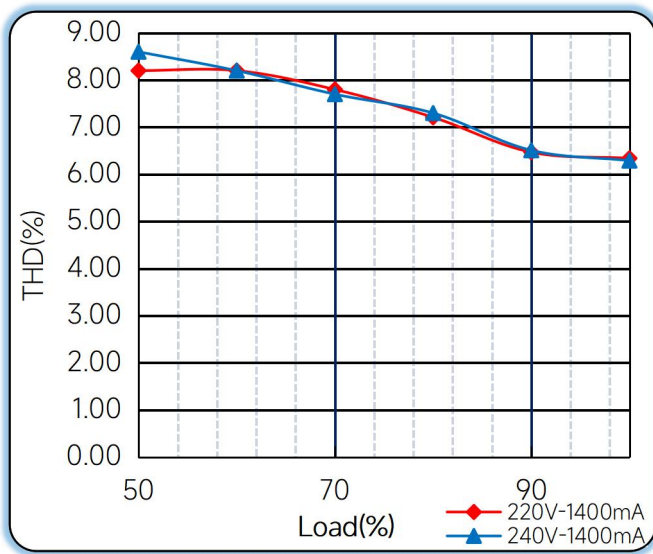Lifetime vs. Temperature Curve

Efficiency vs. Load

Power Factor Characteristics

THD vs. Load


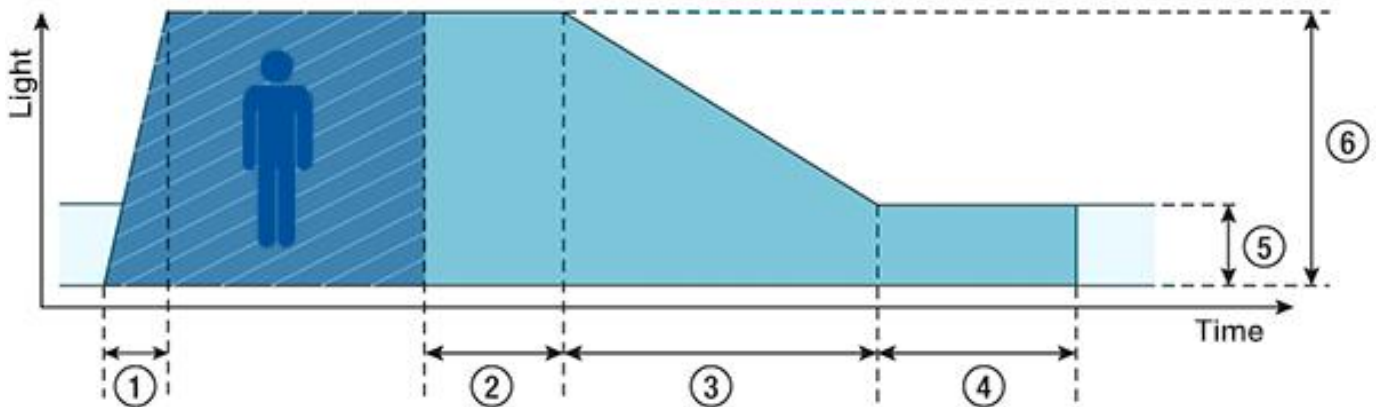
◆ Push dimming operation

Action	Action duration	Function
Short push	<0.5s	Turn on/off
Short push twice	<0.5s	LED on: Save current brightness level LED off: Delete saved level and turn on at 100% brightness
Short push five times	<3s	Quit Corridor mode
Long push	0.5-14s	Dimming up or down
Long push	15s-2mins	Sync all LEDs to be 100% brightness
Long push	>2mins	Enter Corridor mode - LED keep 100% brightness for 2mins. Then brightness will turn to be 10% within 32s if no action during 2mins 100% brightness.

Note:


- 1.The factory default brightness is at 100%.
- 2.Up to 30 drivers can perform the PUSH dimming at the same time when utilizing one common push button
- 3.The maximum length of the cable from the push button to the last driver is 200 meters.

◆ Corridor mode



- ◆ ① **Fade-in time(0.5s)**: the time that starts as soon as the presence of a person is detected. During the fade-in time the luminous intensity is faded up to the presence value.
- ◆ ② **Run-on time(120s)**: the time that starts as soon as the presence of a person is no longer detected. If the presence of a person is detected again during the run-on time the run-on time is restarted from zero. If no presence is detected during the run-on time the fade time is started as soon as the run-on time expires.
- ◆ ③ **Fade time(32s)**: the time during which the luminous intensity is faded from the presence value to the absence value.
- ◆ ④ **Switch-off delay (Never Off)**: the time during which the absence value is held before the lighting is switched off. Depending on the profile selected the switch-off delay may have different values or may not be defined.
- ◆ ⑤ **Absence value(default: 10 %)**: the luminous intensity when there is no person present.
- ◆ ⑥ **Presence value (default: 100 %)**: the luminous intensity when persons are present.

◆ Operating window

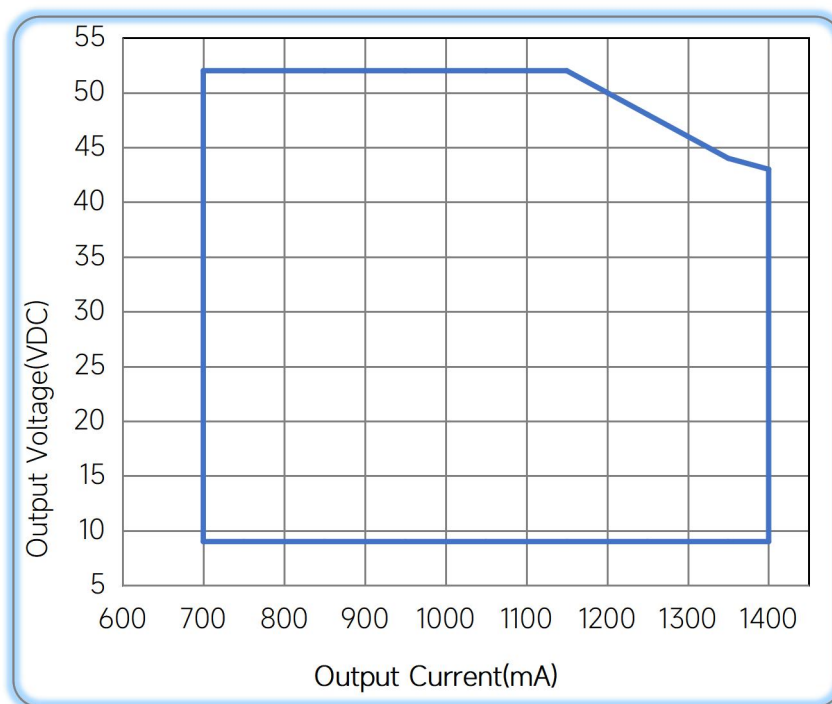

— Operating window 100%

◆ Revision Updates

ITEM	BEFORE	AFTER	VERSION	DATE
Initial			A	2022/08/12

Tel: (86 757) 8252 3552, 8625 6816

Fax: (86 757) 8626 9260, 8625 6780

E-mail: sales@eaglerise.com

Website : <https://lighting.eaglerise.com/index.aspx>



EAGLERISE



Manual