


75W DALI + PUSH Dimming power supply

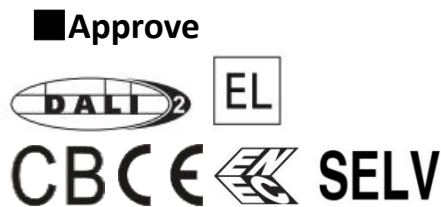

Features

- Class I , SELV, Built-in
- Input Voltage 220-240VAC
- Protections: SCP/OLP/OVP/OTP
- Power Factor: >0.95
- Efficiency : 90%
- Adjustable Output Current with NFC
- Support DALI-2,Push dimming
- Suitable for emergency lighting acc. to EN 50172
- EOFi=15%
- DALI maintainace(Part 251,252,253)
- 5 years warranty

Applications


- Linear light

◆ Description

FMS-75-1800 DALI-2 LN is a 75W constant current LED driver that operates from 198-264Vac input with 1050 to 1800mA output current and a forward voltage range from 15 to 51Vdc. The output current is adjustable. by NFC.With it's compact dimensions from 280 x 30 x 21 mm. It is easy to integrate in linear light products. To ensure trouble-free operation, protection is provided against output short circuit and over Load.

◆ Model code

FMS-75-1800 DALI-2 LN

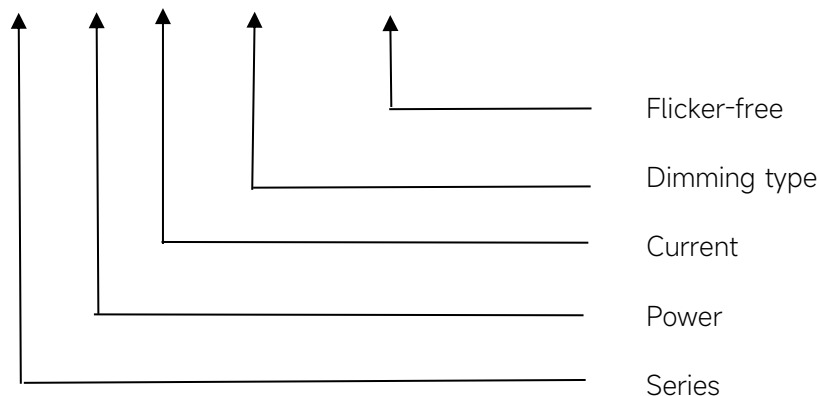

◆ Specification

Output	Constant Current	1050-1250mA	...mA	1651-1800mA
	Voltage Range	15-51VDC	...VDC	15-42VDC
	Unload voltage Max.	59VDC		
	Current Accuracy	±5%		
	Output LF current ripple(≤120Hz)	±5%		
	SVM	≤0.4		
	Pst	≤1		
	Efficiency(Typ.)	90%		
	EOFI	15%		
Input	Rated input voltage	220-240V		
	Range of input voltage	198-264VAC		
	Maximum voltage	300VAC@1 h maximum,unit might not operate in this abnormal condition		
	Range input voltage(DC)	176-280VDC		
	Frequency(Hz)	0/50/60 Hz		
	Displacement factor	>0.95		
	Power Factor(Typ.)	>0.95 @full load		
	Input Current	0.48A max.		
	Start-up time	< 0.8S		
	Switch over time(AC/DC mode)	< 0.4S		
	No Load Power	≤0.3W		
	Standby Power	≤0.3W		
	Network standby power	≤0.3W		
	THD (Typ.)	<10%		
Dimming	Dimming	YES		
	Dimming mode	DALI-2 (IEC 62386-101,102,207,251,252,253) & Push Dimming (Corridor Function)		
	Dimming depth	1%		
	Dimming current range	1 ~100%		
Protection	Over Load Protection	103-120%		
		YES/Latch off		
	Over Voltage Protection	59VDC		
		YES/Latch off		
Capability	Short circuit Protection	YES/Latch off		
	Over Temperature Protection	YES/Auto Resume		
Environment	Surge capability (L-N)	1KV		
	Surge capability (L/N-Ground)	2KV		
Environment	Operating Temperature	-25°C~+60°C@1050-1400mA; -25°C~+50°C@1401-1800mA		
	Humidity	10%-90%RH		

	Tc	85°C
	Storage Temperature	-25°C~+85°C
	Lifetime	>50000h,@Tc=85°C
	Ripple&Noise	25dB(A)@20CM
Surface	Dimension	280 x 30 x 21(LXWXH)mm
	material	metal case
Standards	Safety	IEC61347- 1, IEC61347-2- 13;EN61347- 1, EN61347-2- 13;EN61347- 1, EN61347-2- 13, EN62384
	EMC	EN55015, EN61000-3-2, EN61000-3-3, EN61547;EN61000-4-2,3,4,5,6,8,11, EN61547
	ErP	Erp2.0 EU 2019/2020
	RoHS	RoHS (2011/65/EU) (EU)2015/863
DALI performance	EN 62386-101 (DALI-2) EN 62386-102 (DALI-2) EN 62386-207 (DALI-2,including part251,252,253)	
Note	1.All parameters NOT specially mentioned are measured at 230VAC input , full load and 25°C of ambient temperature. 2.Ripple & Noise are measured at 20MHz of bandwidth 3.The DC input for this product is only used for emergency lighting and applies to functional and safety requirements, EMC is not considered. 4.DALI protocol comprises 16 groups and 64 addresses.Up to 32 drivers can perform the PUSH dimming at the same time when utilizing one push button. 5.Unload voltage Max. is measured 5 seconds after power-on. 6.EL compatible with IEC 61347-2-13 Annex J, compatible with EN 60598-2-22 emergency lighting fixtures, compatible with EN 50172 central battery system applications. 7.All Eaglerise power supply are complied with EMI regulations. Since they are belong to component and will be installed inside system enclosure. When they are integrated into a system, the EMI characteristics of the system must be re-verified again.	


◆ Parameter

Number	Output			
	Current (mA)	Voltage (VDC)	Voltage No load (VDC)	Power (W)
*1	1050-1250	15-51VDC	59	63.8
2	1251-1450	15-50VDC		72.5
3	1451-1550	15-47VDC		73
4	1551-1650	15-45VDC		74.3
5	1651-1800	15-42VDC		75.6

* Factory default

◆ Inrush Current


I _{peak}	T _{width}	B10	B16	B20	C10	C16	C20
14.2A	33.6μs	16pcs	26pcs	33pcs	16pcs	26pcs	33pcs

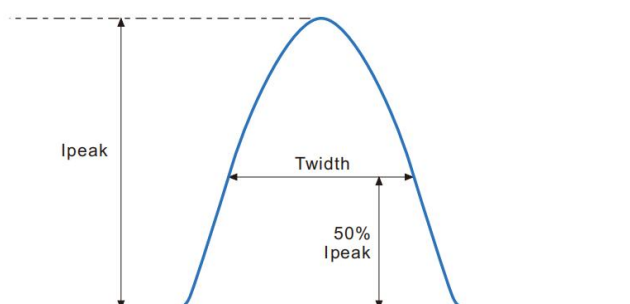


Remarks:

- 1.The number of drives mounted under different MCBs in the table is the maximum value. Please do not exceed this number during installation.
- 2.Different brands and models of miniature circuit breakers, the number of drives mounted will be slightly different.


◆ Wiring diagram

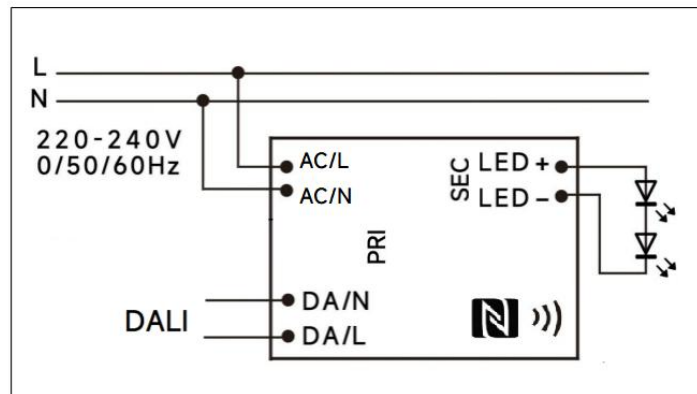

DALI dimming application

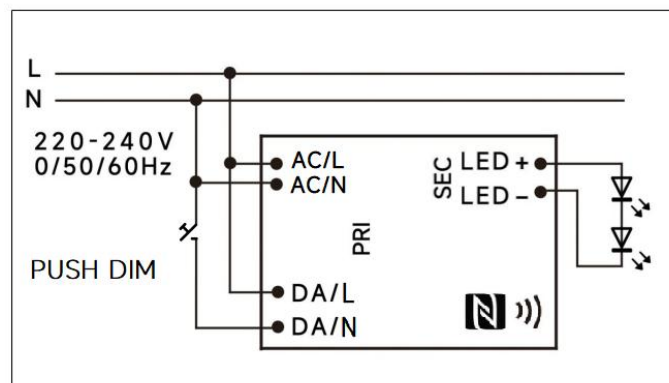


PushDIM dimming application

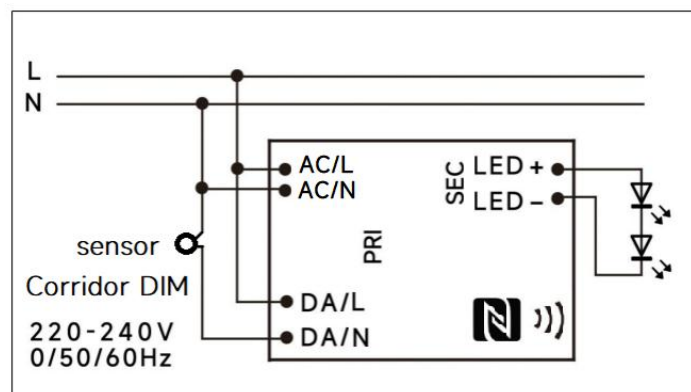

Corridor DIM dimming application

◆ 2D diagram

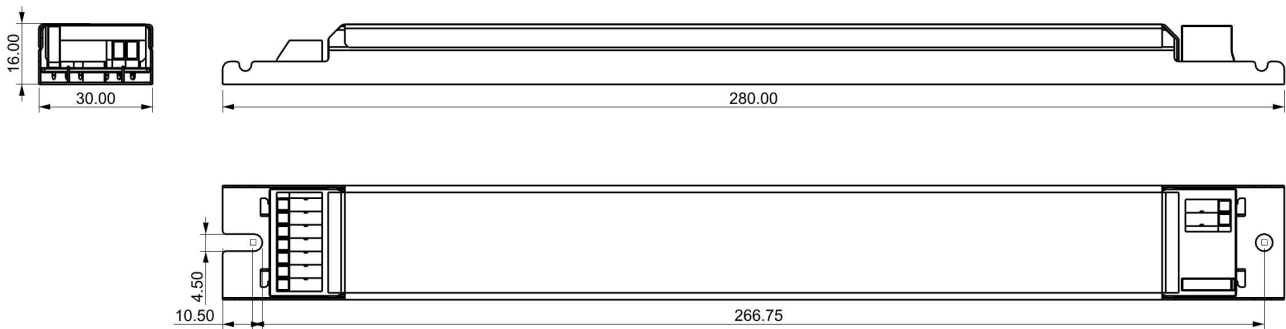





◆ Wiring & Connections

Specification item		Value (Unit)
Input	Input wire cross-section	0.5...1.5 mm ²
	Input wire gauge.	16...20 AWG
	Input wire strip length	7...9mm
Output	Output wire cross-section	0.5...1.5 mm ²
	Output wire gauge.	16...20 AWG
	Output wire strip length	7...9mm

◆ Packaging

Model	Product Dimensions(mm)	weight/piece	Outer carton dimension(mm)	Quantity/carton	Net weight/carton(Kg)	Gross weight/carton(Kg)
FMS-75-1800 DALI-2 LN	280x30x21	0.2185	Inside:295X255X200 Outside:310X265X210	56	12.236	12.776

◆ Curve for FMS-75-1800 DALI-2 LN, $I_o=1800\text{mA}$

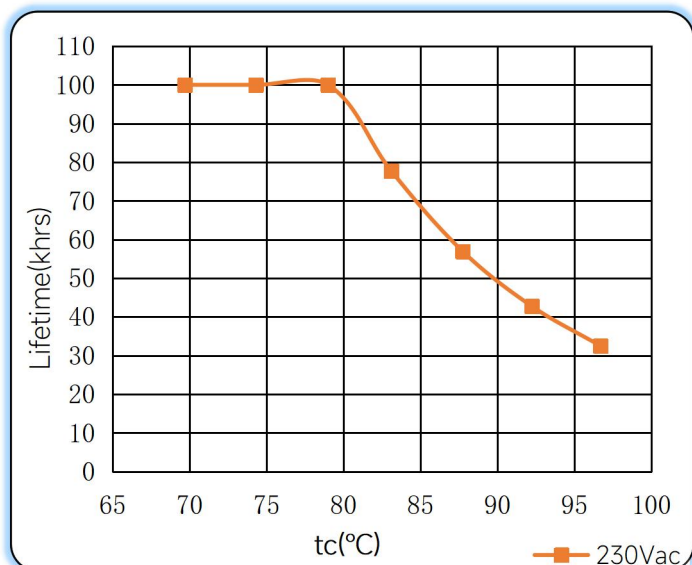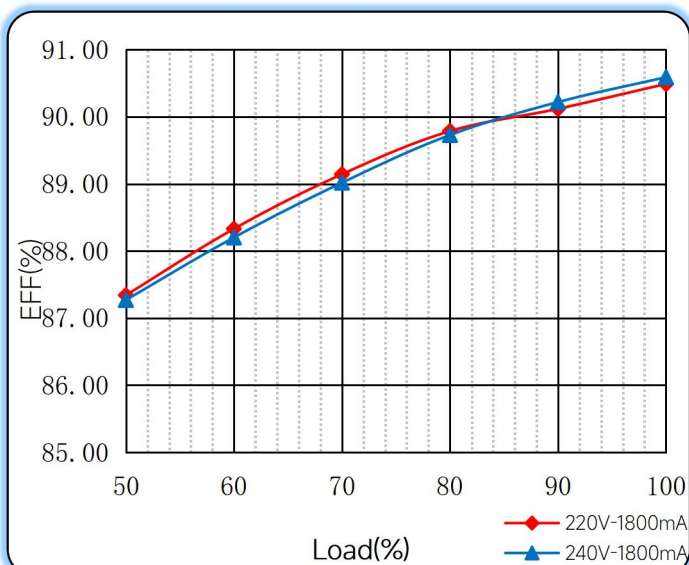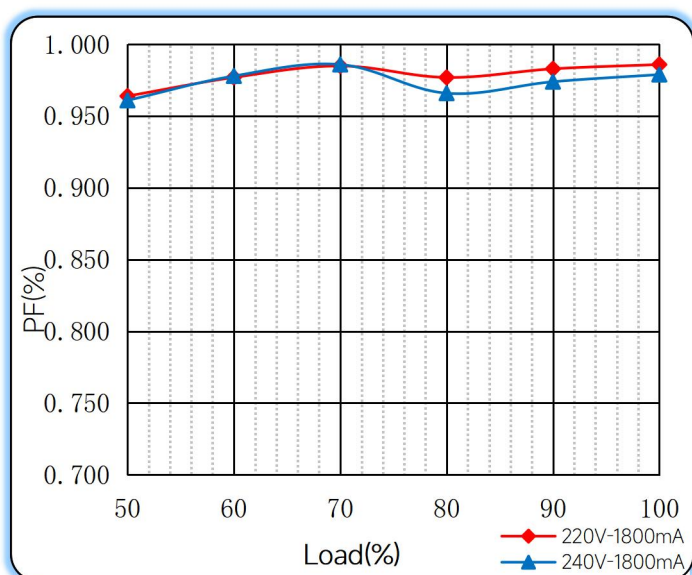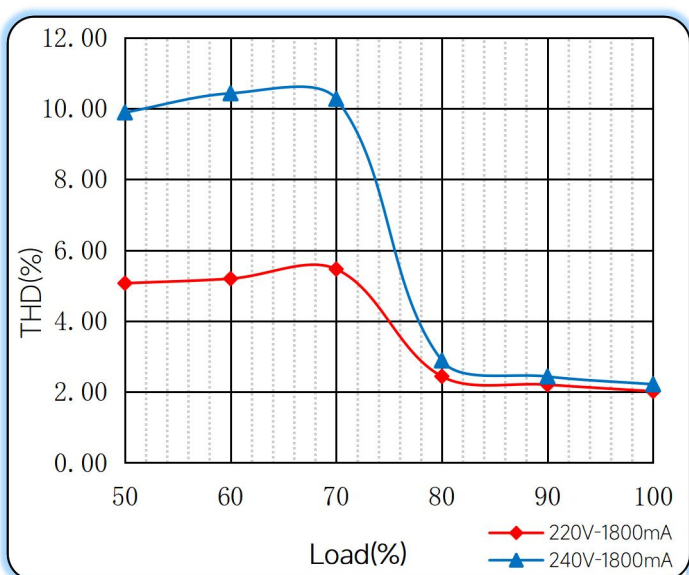Lifetime vs. Temperature Curve

Efficiency vs. Load

Power Factor Characteristics

THD vs. Load


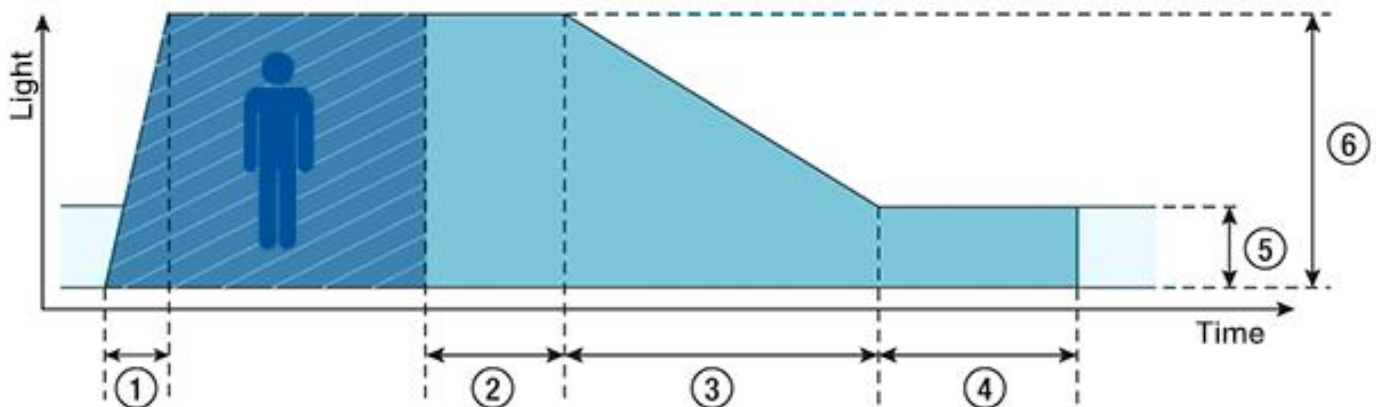
◆ Push dimming operation

Action	Action duration	Function
Short push	<0.5s	Turn on/off
Short push twice	<0.5s	LED on: Save current brightness level LED off: Delete saved level and turn on at 100% brightness
Short push five times	<3s	Quit Corridor mode
Long push	0.5-14s	Dimming up or down
Long push	15s-2mins	Sync all LEDs to be 100% brightness
Long push	>2mins	Enter Corridor mode - LED keep 100% brightness for 2mins. Then brightness will turn to be 10% within 32s if no action during 2mins 100% brightness.

Note:


- 1.The factory default brightness is at 100%.
- 2.Up to 30 drivers can perform the PUSH dimming at the same time when utilizing one common push button
- 3.The maximum length of the cable from the push button to the last driver is 200 meters.

◆ Corridor mode



- ◆ ① **Fade-in time(0.5s)**: the time that starts as soon as the presence of a person is detected. During the fade-in time the luminous intensity is faded up to the presence value.
- ◆ ② **Run-on time(120s)**: the time that starts as soon as the presence of a person is no longer detected. If the presence of a person is detected again during the run-on time the run-on time is restarted from zero. If no presence is detected during the run-on time the fade time is started as soon as the run-on time expires.
- ◆ ③ **Fade time(32s)**: the time during which the luminous intensity is faded from the presence value to the absence value.
- ◆ ④ **Switch-off delay (Never Off)**: the time during which the absence value is held before the lighting is switched off. Depending on the profile selected the switch-off delay may have different values or may not be defined.
- ◆ ⑤ **Absence value(default: 10 %)**: the luminous intensity when there is no person present.
- ◆ ⑥ **Presence value (default: 100 %)**: the luminous intensity when persons are present.

◆ Operating window

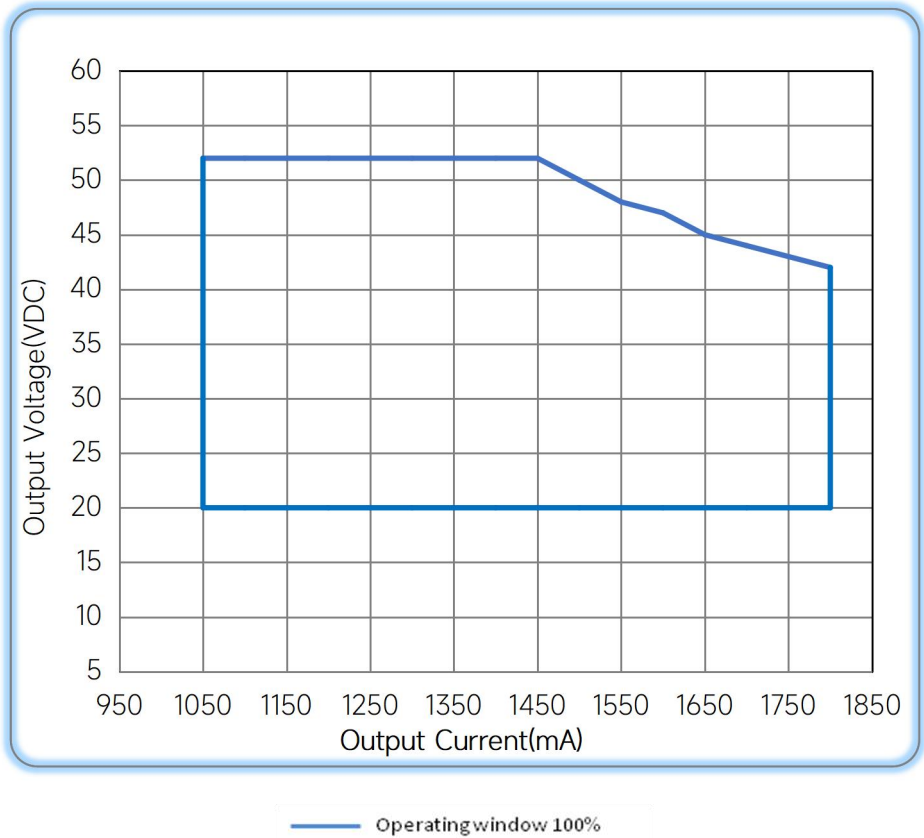

◆ Revision Updates

ITEM	BEFORE	AFTER	VERSION	DATE
Initial			A	2023/05/05

Remark:The final interpretation of the contents of the specification belongs to Eaglerise Electric & Electronic (China) Co., Ltd.

Tel: +86-0757-86256822, +86-0757-86256831

E-mail: sales@eaglerise.com

Website : <https://lighting.eaglerise.com>



EAGLERISE



Manual