

40W Constant Current -FMS Series



■ Approve



Features

- For luminaries of protection Class I , Built-in
- Input Voltage :220-240VAC
- Protections: SCP/OLP/OVP/OTP
- Power Factor: >0.95@full load
- Efficiency: 90%@250~300mA,230VAC;
89%@350~400mA,230VAC
- Adjustable Output Current with dip-switch
- 5 years warranty

Applications

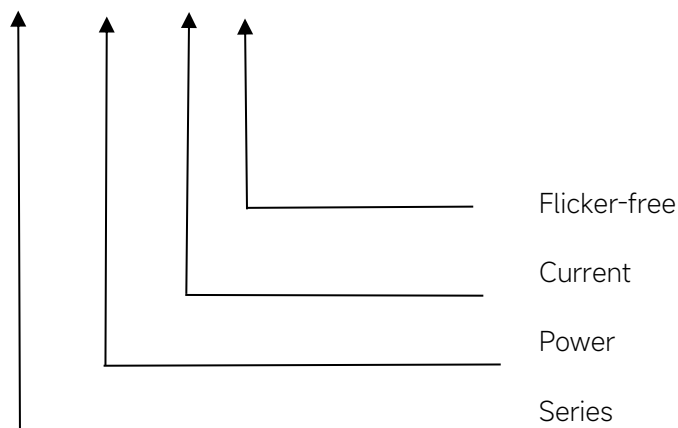
- Linear light

◆ Description

FMS-40-400 LD1-F is a 40W isolated design constant current LED driver that operates from 198-264Vac input with 250 to 400mA output current. The output current is adjustable by dip-switch. With it's long dimensions from 210 x 30 x 21mm. It is easy to integrate in linear light products. To ensure trouble-free operation, protection is provided against output short circuit, over Load and over temperature.

◆ Model code

FMS-40-400 LD1-F



◆ Specification

Output	Constant Current	250mA	300mA	350mA	400mA
	Voltage Range	40-160V	40-133V	40-114V	40-100V
	Unload voltage Max.	250VDC			
	Current Accuracy	±5%			
	Output LF current ripple(≤120Hz)	±3%			
	SVM	≤1			
	Pst	≤0.4			
	Efficiency(Typ.)	90%@250~300mA,230VAC; 89%@350~400mA,230VAC			
Input	Rated input voltage(V)	220-240VAC			
	Range of input voltage(VAC)	198-264VAC			
	Maximum voltage	380VAC@1 h maximum,unit might not operate in this abnormal condition			
	Frequency(Hz)	50/60 Hz			
	Displacement factor	>0.95			
	Power Factor	>0.95@full load			
	Input Current max	0.3A			
	Start-up time	< 0.5S			
	No Load Power	≤0.5W			
	THD (Typ.)	<10%			
Protection	Over Load Protection	> 105%			
		YES/Auto Resume			
	Over Voltage Protection	> 180VDC			
		YES/Auto Resume			
capability	Surge capability (L-N)	2KV			
	Surge capability (L/N-Ground)	2KV			
Environment	Operating Temperature	-20°C~+50°C			
	Humidity	10%-90%RH			
	Tc	80°C			
	Storage Temperature	-25°C~+85°C			
	Life time	> 50000h@Tc=70°C,230VAC			
	Noise	≤25dB(A)@20cm			
Surface	Dimension	210X30X21(LXWXH)mm			
	material	metal case			
Standards	Safety	IEC61347- 1, IEC61347-2- 13;EN61347- 1, EN61347-2- 13;EN62384			

	EMC	EN55015, EN61000-3-2, EN61000-3-3, EN61547;EN 62493;EN61000-4-5;EN61000-4-2,3,4,5,6,8,11, EN61547
	RoHS	RoHS (2011/65/EU) (EU)2015/863
Note	1.All parameters not specially mentioned are measured at 240VAC input , full load and 25°C of ambient temperature. 2.Ripple & Noise are measured at 20MHz of bandwidth by using a 300mm twisted pair-wire terminated with a 0.1uF & 47 uF parallel capacitor. 3.Temperature test: tested at high temperature(50°C)/low temperature(-20°C)/normal temperature(25°C) 4.Data are typical values obtained from test samples 5.Switch and dimmer are not recommended to connect between this product output and luminaries. 6.The DC input for this product is only used for emergency lighting and applies to functional and safety requirements, EMC is not considered. 7.The over-temperature protection of the product is provided by the IC. 8.EL compatible with IEC 61347-2-13 Annex J, compatible with EN 60598-2-22 emergency lighting fixtures, compatible with EN 50172 central battery system applications.	


◆ Parameter

Number	Output				Switch position		
	Current (mA)	Voltage (VDC)	Voltage No load (VDC)	Power (W)	1	2	3
1	250mA	40-160VDC	250VDC	40	--	--	--
2	300mA	40-133VDC		39.9	ON	--	--
3	350mA	40-114VDC		39.9	--	ON	--
*4	400mA	40-100VDC		40	ON	ON	ON

* Factory default

◆ Inrush Current


I_{peak}	Twidth	B10	B16	B20	C10	C16	C20
18.9A	196μs	22pcs	35pcs	44pcs	26pcs	42pcs	53pcs

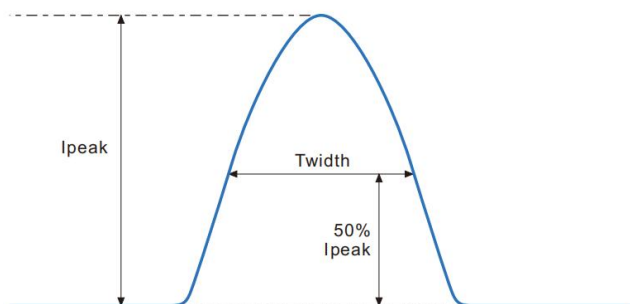





Remarks:

- 1.The number of drives mounted under different MCBs in the table is the maximum value. Please do not exceed this number during installation.
- 2.Different brands and models of miniature circuit breakers, the number of drives mounted will be slightly different.

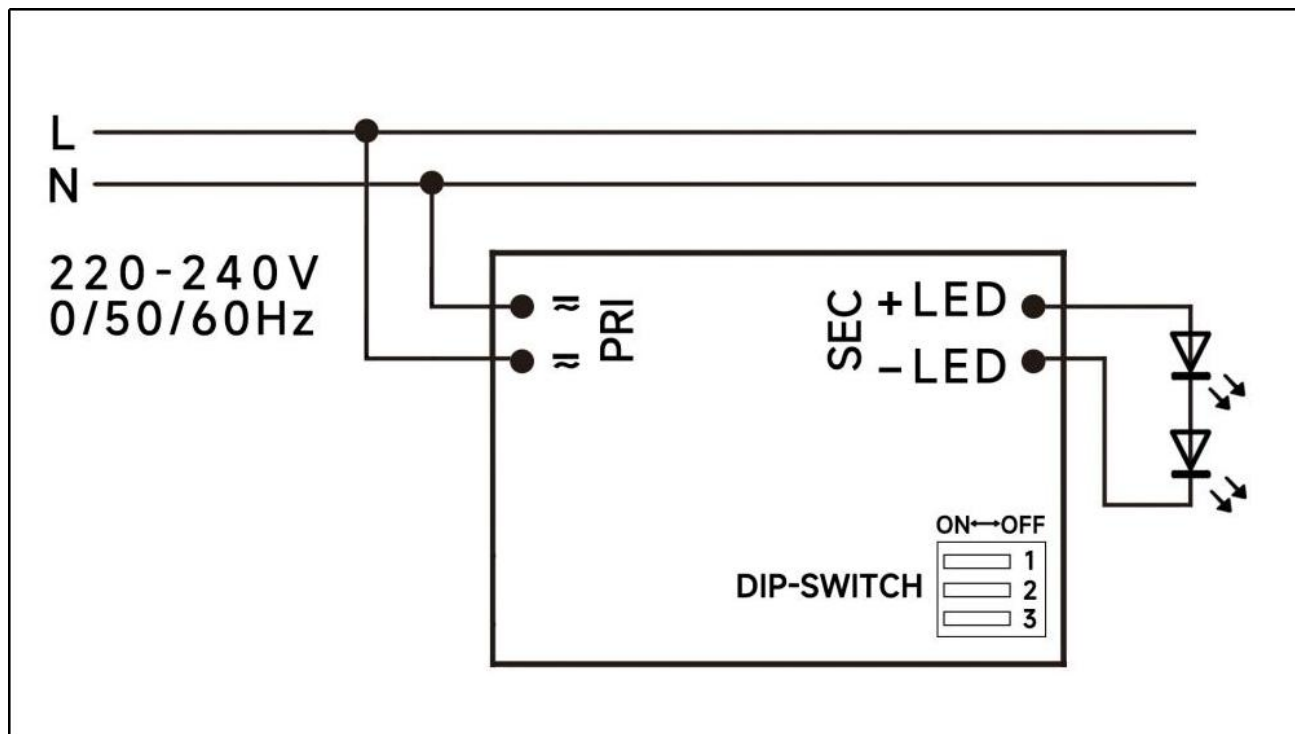
◆ Wiring diagram



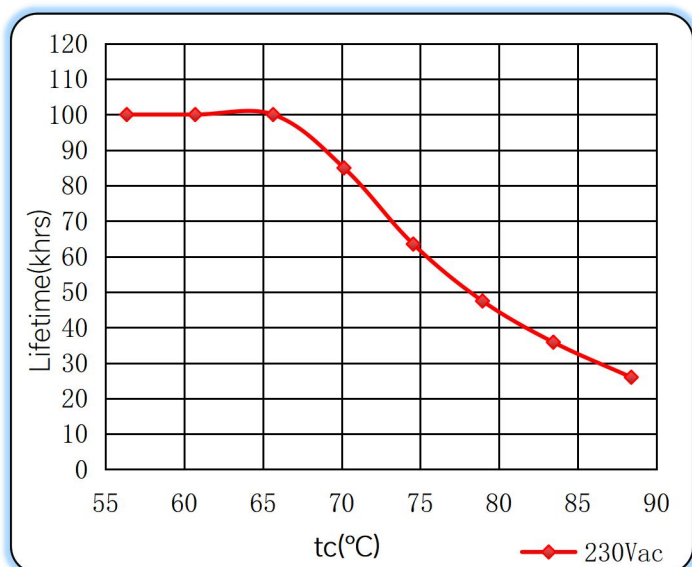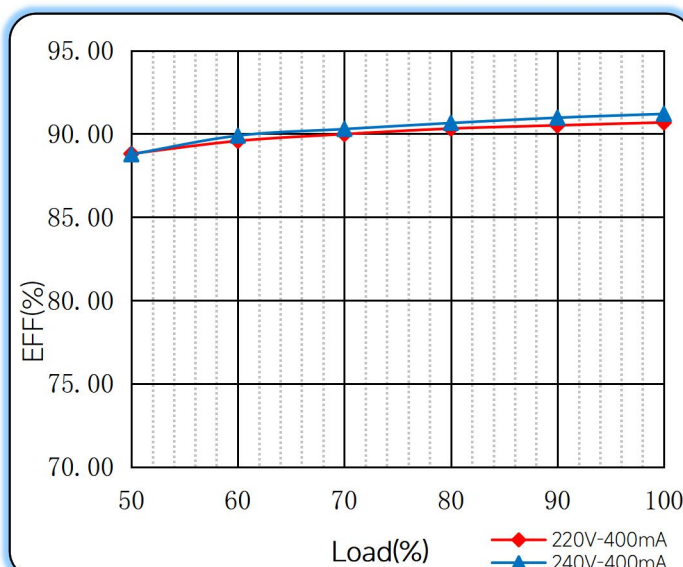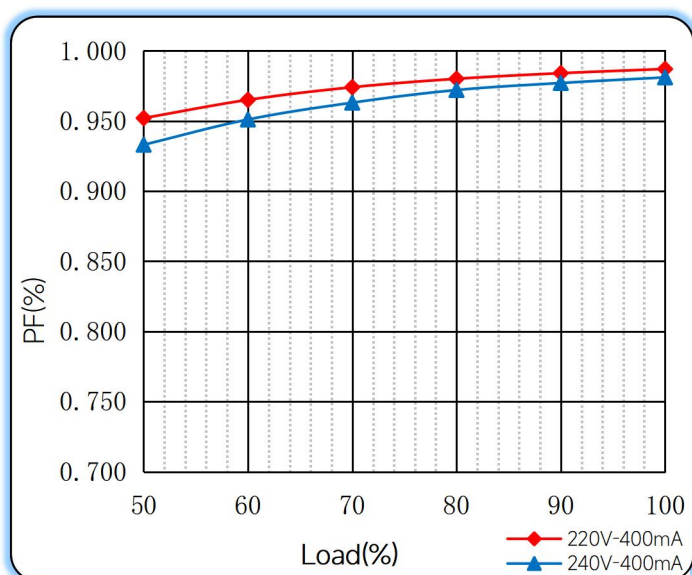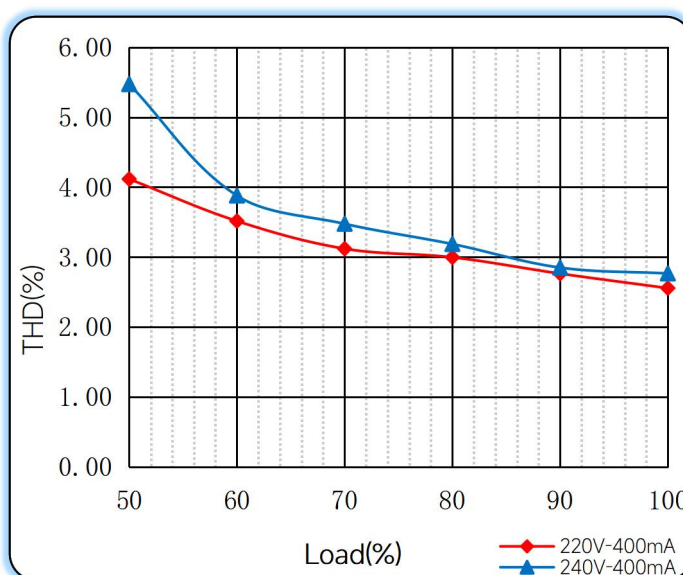◆ Curve for FMS-40-400 LD1-F, $I_o=400mA$

Lifetime vs. Temperature Curve

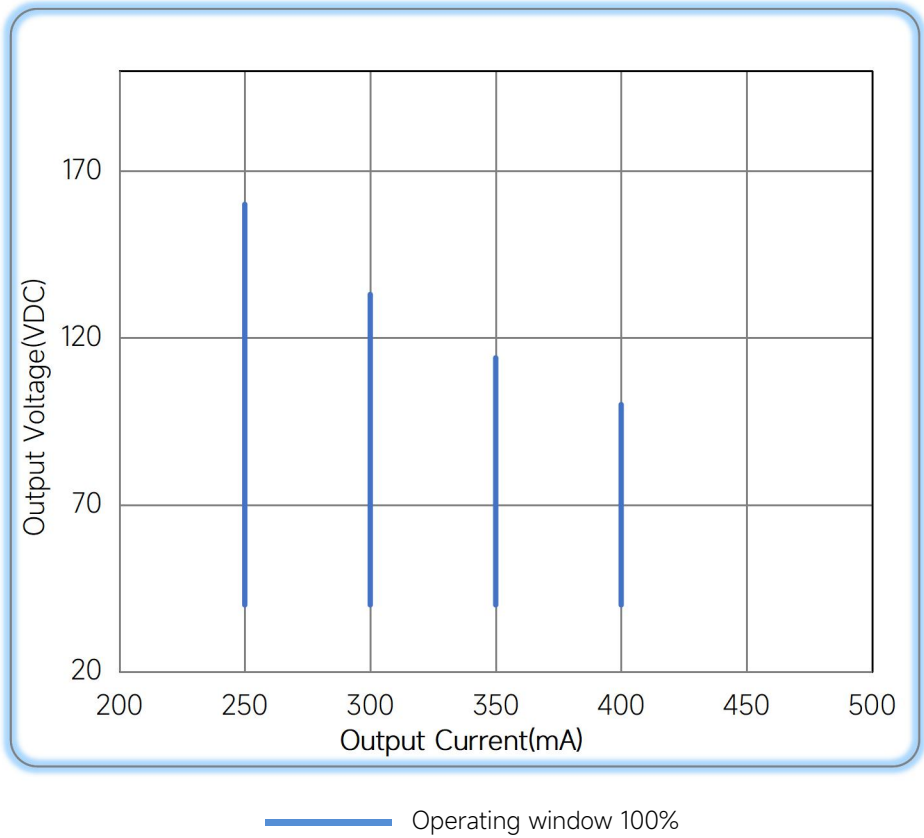Efficiency vs. Load

Power Factor Characteristics

THD vs. Load


◆ Operating window



◆ Revision Updates

ITEM	BEFORE	AFTER	VERSION	DATE
Initial			A	2023/09/05

Remark:The final interpretation of the contents of the specification belongs to Eaglerise Electric & Electronic (China) Co., Ltd.

Tel: +86-0757-86256822, +86-0757-86256831
E-mail: sales@eaglerise.com
Website : <https://lighting.eaglerise.com>



EAGLERISE



Manual