


21W Constant Current power supply



■ Approve

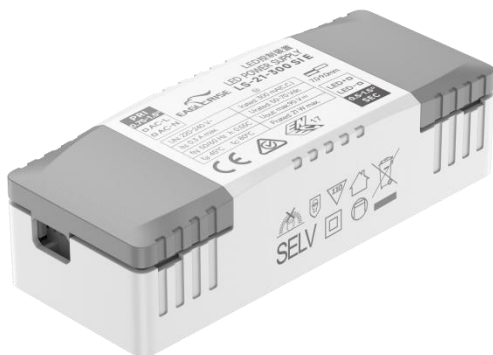

SELV

Features

- Class II, SELV, Independent
- Input Voltage: 220-240VAC
- Protections: SCP/OLP/OVP/OTP
- Power Factor: 0.55C
- Efficiency: $\geq 85\%$
- 5 years warranty
- IP20

Applications


- LED panel, LED down light
- LED spot light

◆ Description

LS-21-XXX SI E is a 21W constant current LED driver with 300~700mA output current. With it's compact dimensions from 92 x 36 x 25 mm it is easy to integrate in LED panel, LED down light, LED spot light products. To ensure trouble-free operation, protection is provided against output short circuit and over Load.

◆ Model code

LS-21-XXX SI E

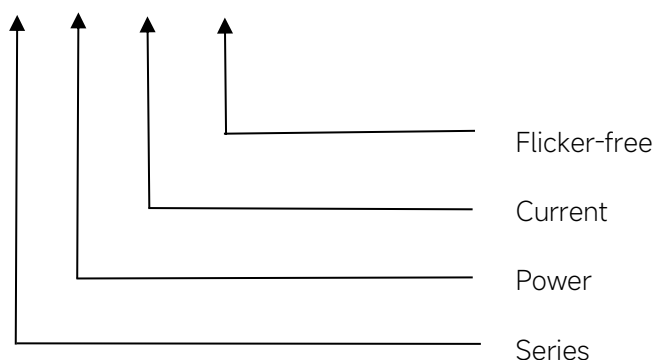

◆ Specification

Output	Constant Current (mA)	300	350	400	450	500	550	600	650	700
	Voltage Range(VDC)	50-70	42-60	27-42	27-42	27-42	27-40	27-39	20-32	18-30
	Unload voltage Max.	90	80	55	55	55	55	55	50	50
	Current Accuracy	±5%								
	Output HF current ripple(≥1KHz)	±5%								
	Output LF current ripple(≤120Hz)	±5%								
	SVM	≤0.4								
	P _{st}	≤1								
	Efficiency(Typ.)	≥85%								
Input	Rated input voltage	220-240VAC								
	Range of input voltage	198-264VAC								
	Frequency(Hz)	50/60 Hz								
	Displacement factor	≥0.7								
	Power Factor	0.55C								
	Input Current max	0.3A								
	Start-up time	< 0.5S								
	No Load Power	≤0.5W								
Protection	Over Load Protection	103-120%								
		YES/Auto Resume								
	Over Voltage Protection(VDC)	95	90	80	55	55	55	55	50	50
		YES/Auto Resume								
	Short circuit Protection	YES/Auto Resume								
	Over Temperature Protection	YES/Auto Resume								
Environment	Operating Temperature	-20°C~+45°C								
	Humidity	20%-90%RH								
	Tc	80°C								
	Storage Temperature	-25°C~+60°C								
	Life time	> 30,000h@Tc=75°C; > 60,000h@Tc=65°C								
Surface	Dimension	92x36x25 (LxWxH)mm								
Standards	EN 61547;EN 61347-1,EN 61347-2-13;IEC 61347-1,IEC 61347-2-13;GB 19510.1,GB 19510.14;GB/T 17743,GB 17625.1;EN 62384;EN IEC 55015,EN IEC 61000-3-2,EN 61000-3-3									
Others	ErP	EU 2019/2020								
	RoHS	RoHS (2011/65/EU) (EU)2015/863								
Note	1.All parameters not specially mentioned are measured at 230VAC input , full load and 25°C of ambient temperature. 2.Ripple & Noise are measured at 20MHz of bandwidth by using a 300mm twisted pair-wire terminated with a 0.1uF & 47 uF parallel capacitor. 3.Data are typical values obtained from test samples									


◆ Model list

Number	Model number	Output			
		Current (mA)	Voltage (VDC)	Voltage No load (VDC)	Power (W)
1	*LS-21-300 SI E	300	50-70	90	21
2	LS-21-350 SI E	350	42-60	80	21
3	*LS-21-400 SI E	400	27-42	55	16.8
4	*LS-21-450 SI E	450	27-42		18.9
5	*LS-21-500 SI E	500	27-42		21
6	LS-21-550 SI E	550	27-40		22
7	*LS-21-600 SI E	600	27-39		23.4
8	LS-21-650 SI E	650	20-32	50	20.8
9	LS-21-700 SI E	700	18-30	50	21


◆ Circuit Breaker

I _{peak}	T _{width}	B10	B16	B20	C10	C16	C20
14.2A	102μs	26pcs	42pcs	53pcs	26pcs	42pcs	53pcs

◆ Wiring diagram

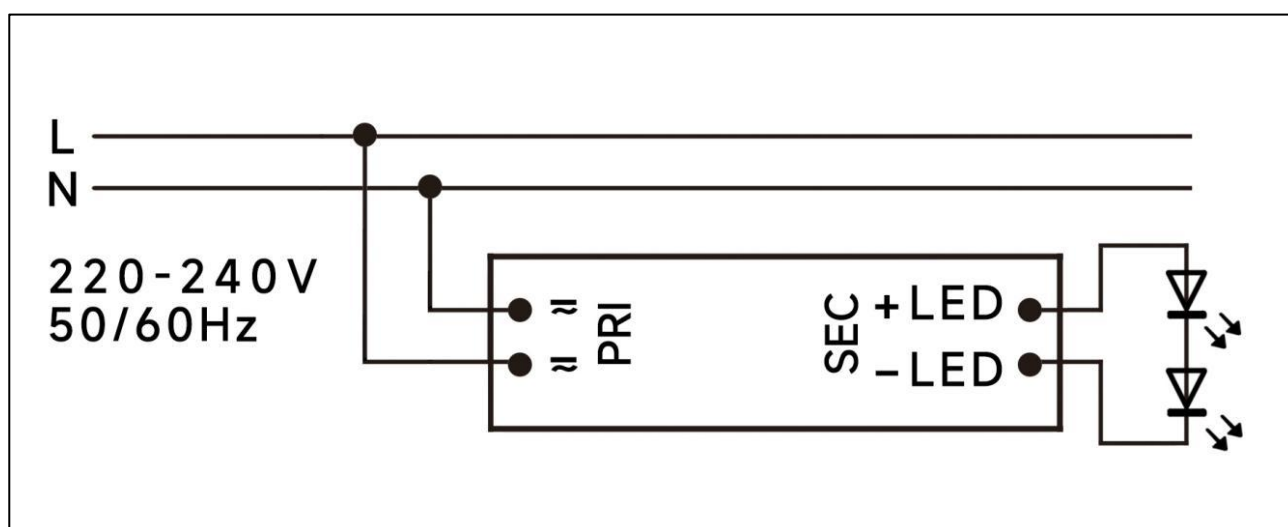




◆ 2D diagram

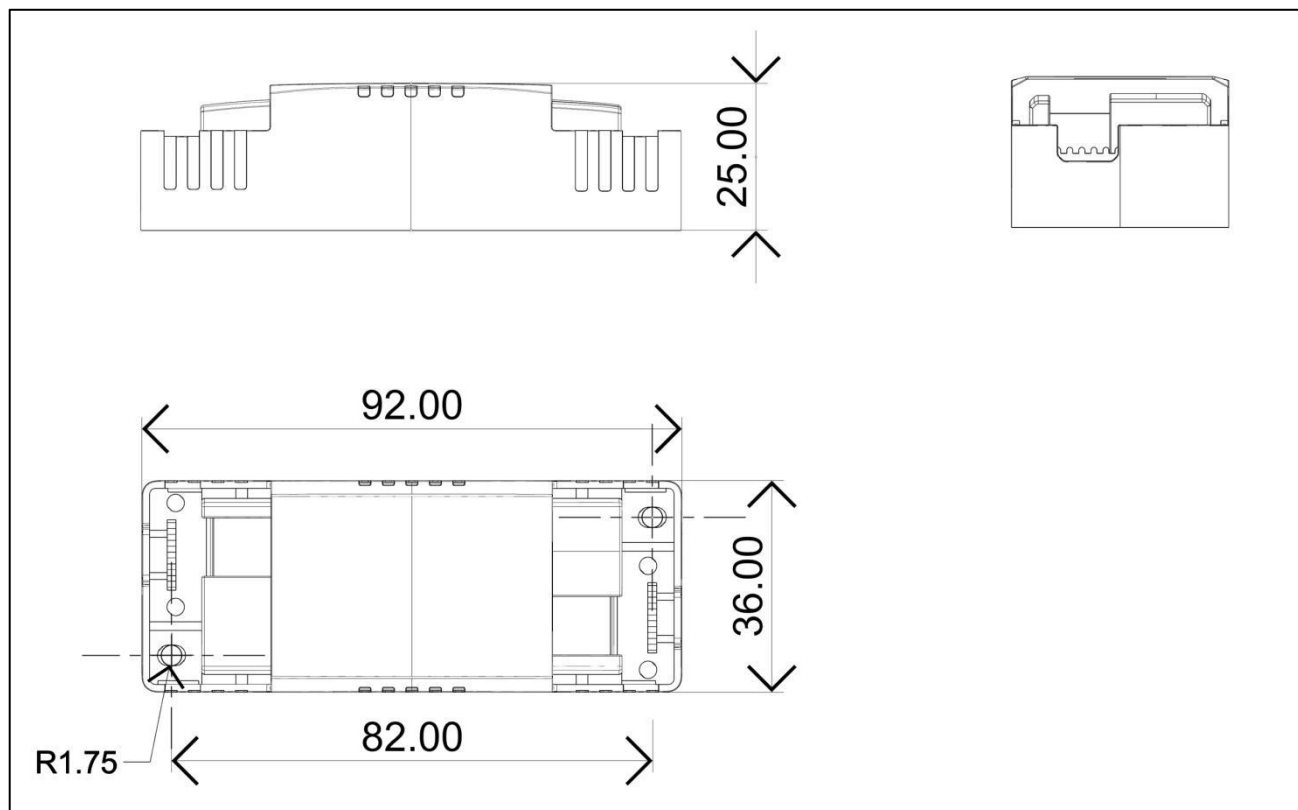


◆ Wiring & Connections

Specification item		Value (Unit)
Input	Input wire cross-section	0.5...1.5 mm ²
	Input wire gauge.	16...20 AWG
	Input wire strip length	7...9mm
Output	Output wire cross-section	0.5...1.5 mm ²
	Output wire gauge.	16...20 AWG
	Output wire strip length	7...9mm

◆ Curve for LS-21-500 SI E, $I_o=500mA$

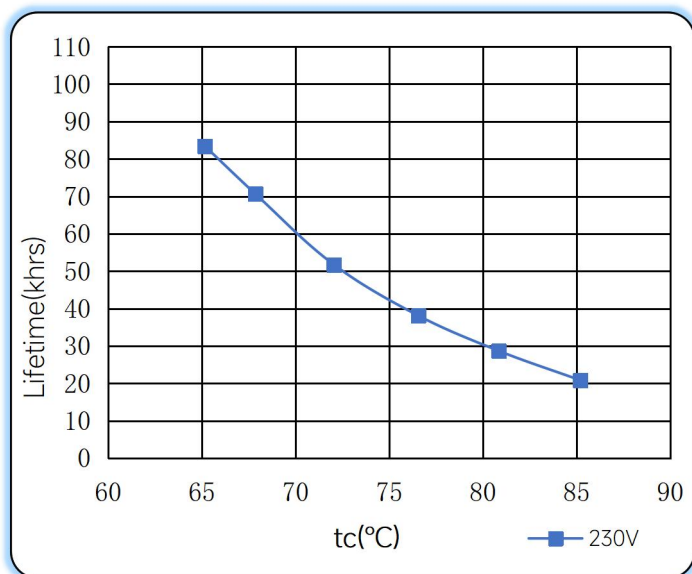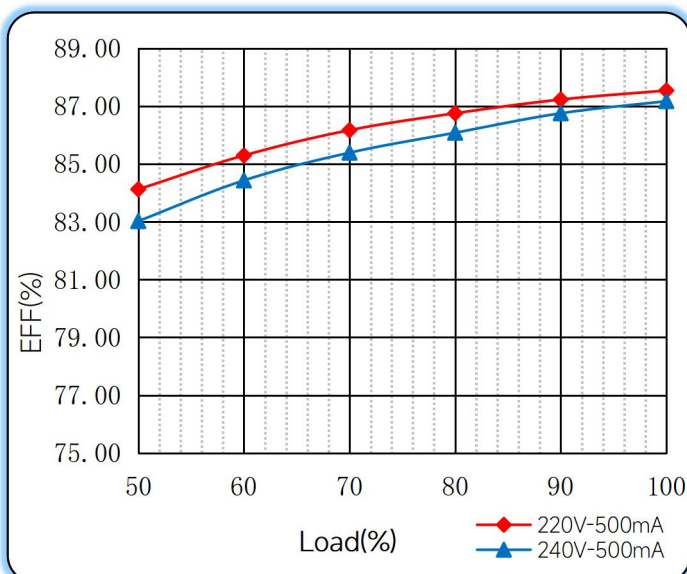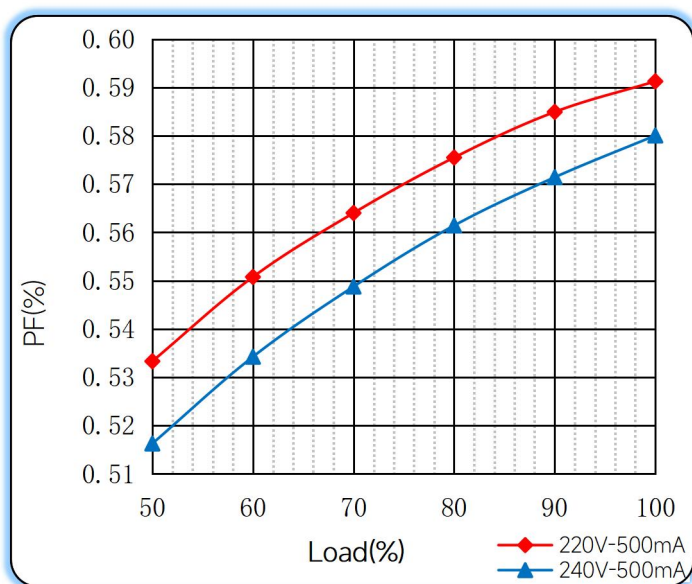Lifetime vs. Temperature Curve

Efficiency vs. Load

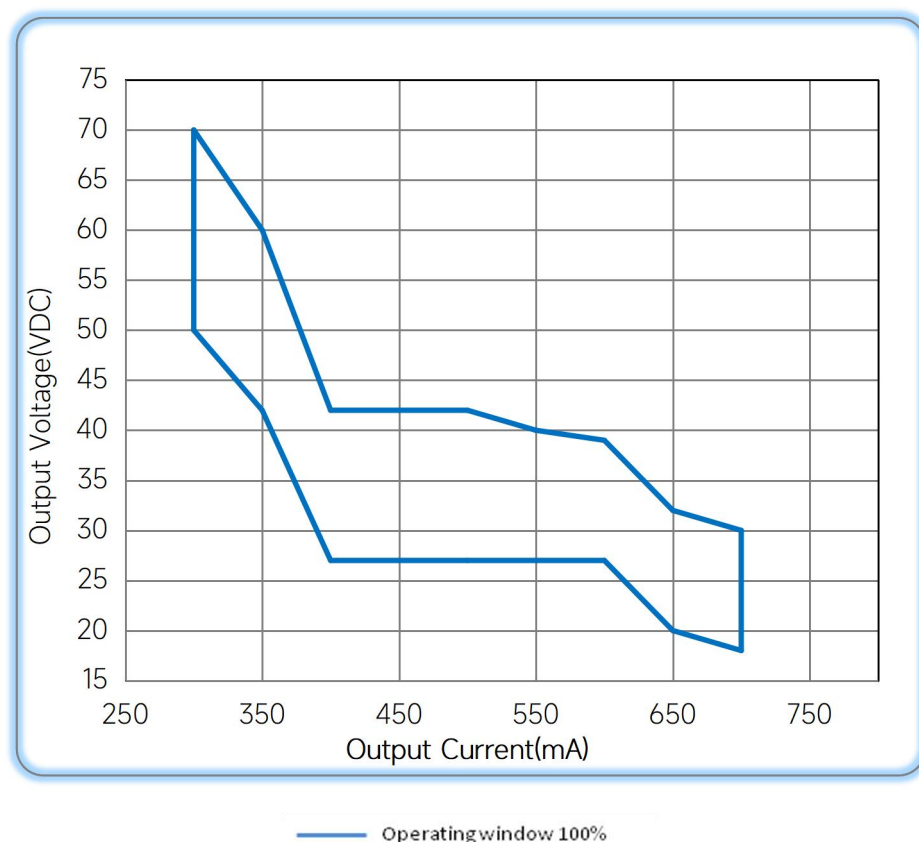Power Factor Characteristics


◆ Operating window



◆ Revision Updates

ITEM	BEFORE	AFTER	VERSION	DATE
Initial			A	2022/11/16

Tel: +86-0757-86256822, +86-0757-86256831

E-mail: sales@eaglerise.com

Website : <https://lighting.eaglerise.com>



EAGLERISE



Manual