

100W Constant Voltage Slim-US Series



Features

- Class II, SELV, Independent
- Input Voltage 220-240VAC
- Protections: SCP/OLP/OTP
- Power Factor: ≥ 0.95
- Efficiency: $\geq 88\%$ @12V; $\geq 91\%$ @24V/48V
- 5 years warranty

Applications


- LED strips

◆ Description

US-100-XX LI2 is a 100W constant voltage LED driver that operates from 198-264Vac input with 12V, 24V or 48V output voltage. With it's slim dimensions from 365 x 30 x 18mm. It is easy to integrate in LED strips product. To ensure trouble-free operation, protection is provided against output short circuit, over Load and over temperature.

◆ Model code


US-100-XX LI2

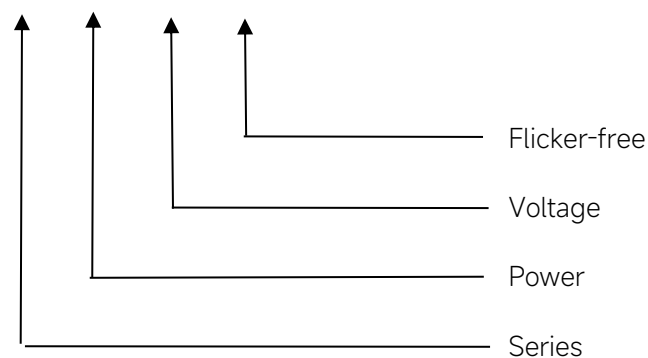


◆ Specification

Output	Constant Voltage	12VDC		24VDC	48VDC
	Current Range	0.833-8.33A		0.417-4.17A	0.208-2.08A
	Voltage Accuracy	±5%			
	Output HF current ripple(≥1KHz)	±1%			
	Output LF current ripple(≤120Hz)	±1%			
	SVM	≤0.4@Full Load			
	Pst	≤1@Full Load			
	Efficiency(Typ.)	≥88%		≥91%	
Input	Rated input voltage	220-240VAC			
	Range of input voltage	198-264VAC			
	Frequency(Hz)	50/60 Hz			
	Power Factor	≥0.95@Full load,230V			
	Input Current max	0.78A			
	Start-up time	< 0.5S			
	No Load Power	≤0.5W			
	THD (Typ.)	< 15%@Full load,230V			
Protection	Over Load Protection	105-150%			
		YES/Auto Resume			
	Short circuit Protection	YES/Auto Resume			
	Over Temperature Protection	YES/Auto Resume			
Environment	Operating Temperature	-20°C~~+45°C			
	Humidity	20%-90%RH			
	Tc	90°C		85°C	
	Storage Temperature	-20°C~~+45°C			
	Life time	> 50000h@Tc=75°C			
Surface	Dimension	365X30X18LXWXH)mm			
standards	EN 61347-1; EN61347-2-13; EN62384; EN55015; EN61000-3-2 ; EN61000-3-3; EN 61547;				
Others	ErP	EU 2019/2020			
	RoHS	RoHS (2011/65/EU) (EU)2015/863			
Note	1.All parameters NOT specially mentioned are measured at 230VAC input , full load and 25°C of ambient temperature. 2.Ripple & Noise are measured at 20MHz of bandwidth by using a 300mm twisted pair-wire terminated with a 0.1uF & 47 uF parallel capacitor. 3.Data are typical values obtained from test samples. 4.Dimmers are not recommended for this product.				

◆ Wiring diagram

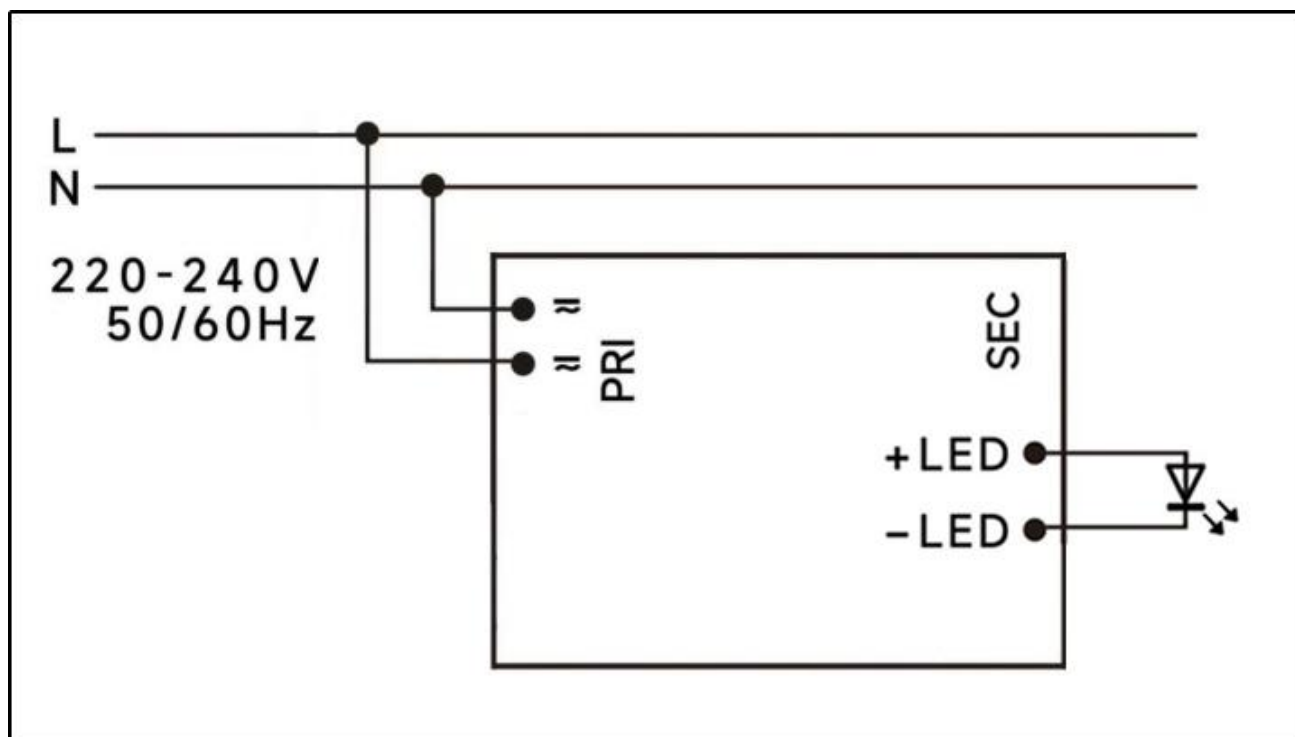


◆ 2D diagram

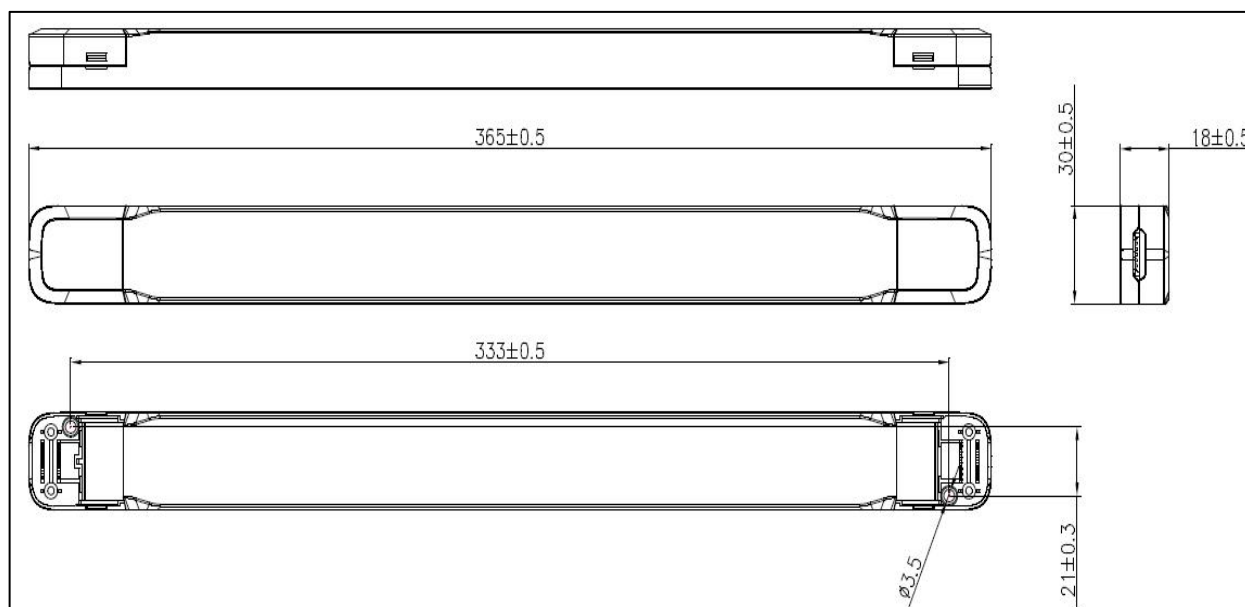


◆ Curve for US-100-12 LI2


Lifetime vs. Temperature Curve

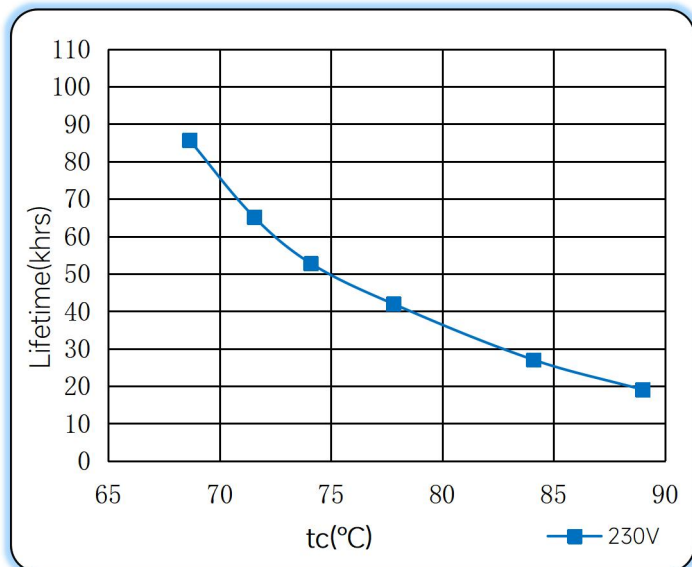


Efficiency vs. Load

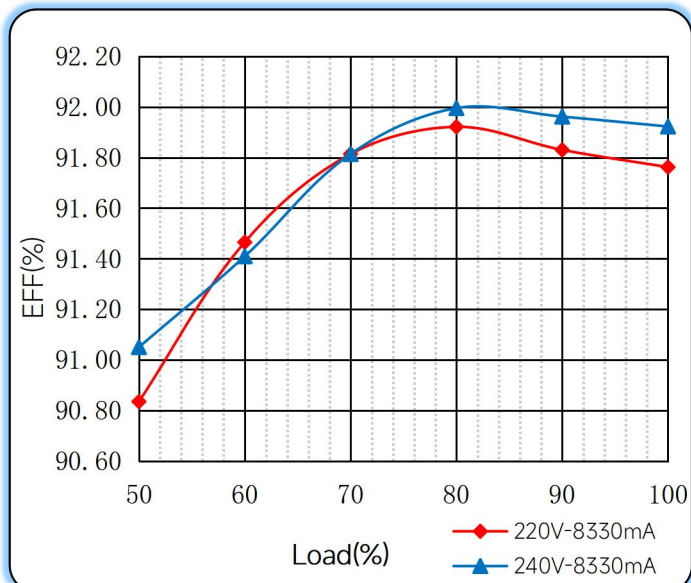


Power Factor Characteristics

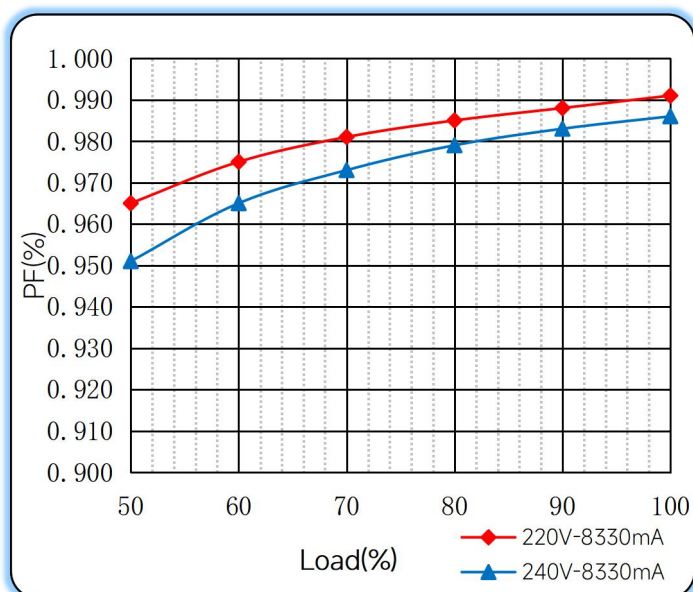

THD vs. Load

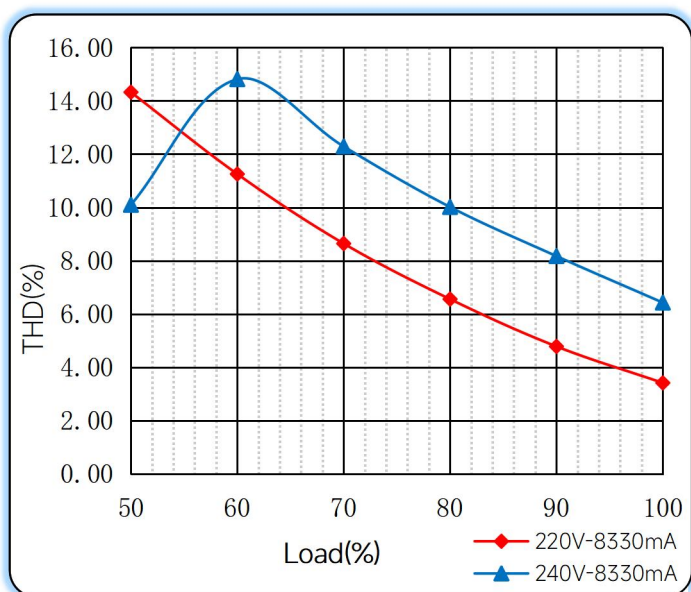

◆ Operating window

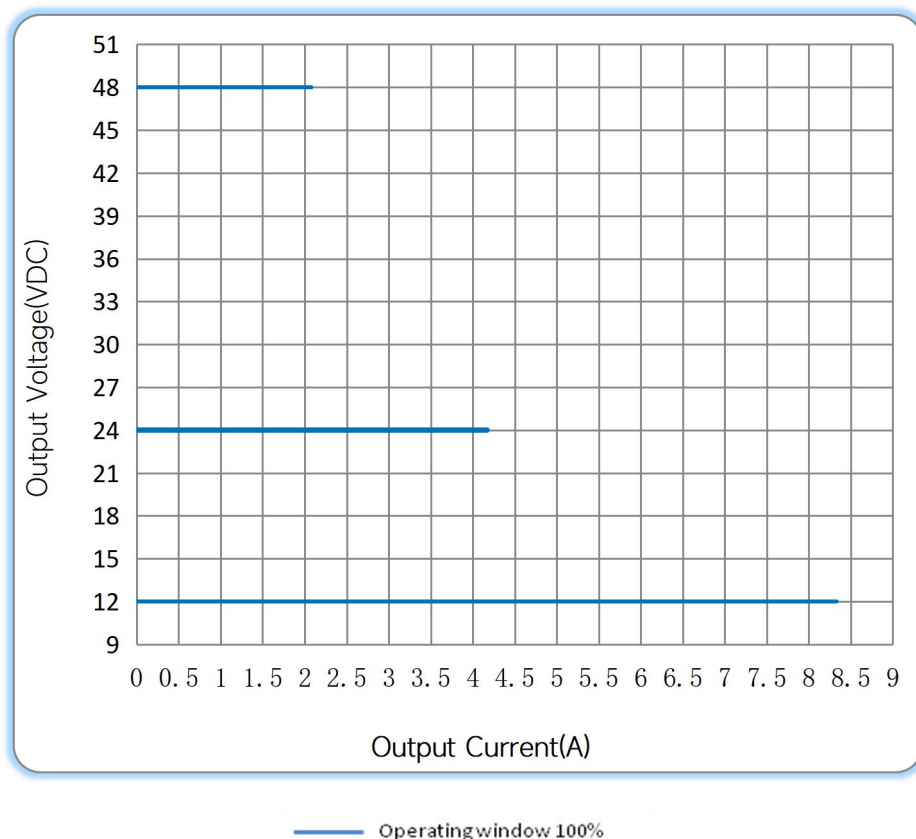

◆ Revision Updates

ITEM	BEFORE	AFTER	VERSION	DATE
Initial			A	2022/05/15
Name	US-100-XX LI1	US-100-XX LI2	B	2023/06/28

Tel: +86-0757-86256822, +86-0757-86256831

E-mail: sales@eaglerise.com

Website : <https://lighting.eaglerise.com>



EAGLERISE



Manual