

100W Constant Voltage Driver



■ Approve



Features

- High efficiency up to 92%
- Built-in active PFC function
- All-Around Protection: OLP, SCP, OLP, OTP
- Waterproof (IP67) and Dry/Damp/Wet Location
- Input Surge Protection: 4kV line-line
6kV line-ground
- Compact Metal Case, Free Air Convection
- High Reliability & Long Lifetime & 5 Years Warranty

Applications


- High ceiling, tunnel lights, outdoor lights

◆ Description

VMS-100-XX IP67 L EXC series is a 100W, constant voltage IP67 LED driver that operates from 198-264Vac input with 12/24/36/42/48V output voltage, excellent power factor and THD feature. With its dimensions from 164.4 x 53 x 32mm. This series of products is specially designed for direct power supply applications such as LED strips. The high efficiency of these drivers and compact metal case enable them to run cooler, significantly improving reliability and extending product life. To ensure trouble-free operation, protection is provided against input surge, output over voltage, short circuit, and over temperature.

◆ Model code

VMS-100-XX IP67 L EXC

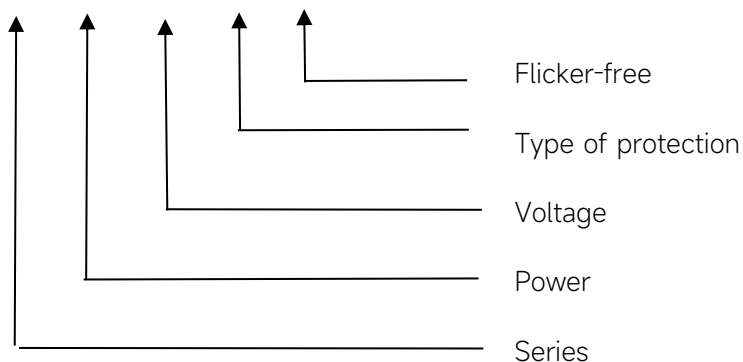


◆ Specification

Output	Constant Voltage	12VDC	24VDC	36VDC	42VDC	48VDC
	Current Range	0-8.33A	0~4.17A	0-2.78A	0-2.38A	0-2.08A
	Unload voltage Max.(VDC)	12.6VDC	25.2VDC	37.8VDC	44.1VDC	50.4VDC
	Voltage Accuracy	±5%				
	Output HF current ripple(≥1KHz)	±5%				
	Output LF current ripple(≤120Hz)	±5%				
	SVM	≤0.4				
	P _{st}	≤1				
	Efficiency(Typ.)	90%			92%	
Input	Rated input voltage	220-240VAC				
	Range of input voltage	198-264VAC				
	Maximum voltage	300VAC@1 h maximum,unit might not operate in this abnormal condition				
	Frequency(Hz)	50/60 Hz				
	Displacement factor	≥0.95				
	Power Factor	>0.96@Full load,230V				
	Input Current max	0.65A				
	Start-up time	< 0.5S				
	No Load Power	≤0.5W				
	THD (Typ.)	<7%@Full load,230V				
Protection	Over Load Protection	110-150%				
		YES/Auto Resume				
	Over Voltage Protection	18VDC	36VDC	50VDC	50VDC	63VDC
		YES/Auto Resume				
	Short circuit Protection	YES/Auto Resume				
Over Temperature Protection	YES/Auto Resume					
capability	Surge capability (L-N)	4KV				
	Surge capability (L/N-Ground)	6KV				
Environment	Operating Temperature	-40°C~+55°C(Details can be seen “Load vs Ta” curve.)				
	Humidity	20%-90%RH				
	Tc	90°C				
	Storage Temperature	-40°C~+85°C				
	Life time	> 50000h@Tc=75°C				
	Noise	≤25dB(A)@20cm				
Surface	Dimension	164.4x53x32(LXWXH)mm				
	material	metal case				
Standards	Safety	GB19510. 1, GB19510. 14;IEC61347- 1, IEC61347-2- 13;AS/NZS 61347- 1, AS/NZS 61347-2- 13;AS 61347.2.13;EN62384;				

	EMC	GB/T17743, GB17625. 1;EN55015, EN61000-3-2, EN61000-3-3, EN61547;EN55015, EN61000-3-2, EN61000-3-3, EN61547,EN 62493;EN61000-4-5;EN61000-4-2,3,4,5,6,8,11, EN61547
	ErP	ErP2.0 EU 2019/2020
	RoHS	RoHS (2011/65/EU) (EU)2015/863
Note	1.All parameters NOT specially mentioned are measured at 230Vac input and 25°C of ambient temperature. 2.Ripple & Noise are measured at 20MHz of bandwidth by using a 300mm twisted pair-wire terminated with a 0.1uF & 47 μF parallel capacitor. 3.This LED driver meets the EMI specifications above, but EMI performance of a lighting fixture also depends on the other devices on the fixture. 4.The start-up time is measured under cold start-up, frequent switching on and off may extend the start-up time to different degrees. 5.The LED driver complies with the IP67 (and lower) protection rating standards, but is only suitable for indoor damp environments or outdoor sheltered locations (e.g., with rain protection). All products must not be used underwater or buried in the ground. 6.All Eaglerise power supply are complied with EMI regulations. Since they are belong to component and will be installed inside system enclosure. When they are integrated into a system, the EMI characteristics of the system must be re-verified again.	

◆ Inrush Current


I_{peak}	Twidth	B10	B16	B20	C10	C16	C20
44.8A	376 μ s	4pcs	7pcs	9pcs	7pcs	12pcs	15pcs

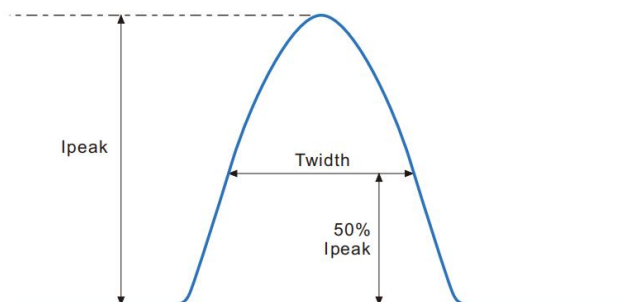


Remarks:

- 1.The number of drives mounted under different MCBs in the table is the maximum value. Please do not exceed this number during installation.
- 2.Different brands and models of miniature circuit breakers, the number of drives mounted will be slightly different.

◆ Wiring diagram

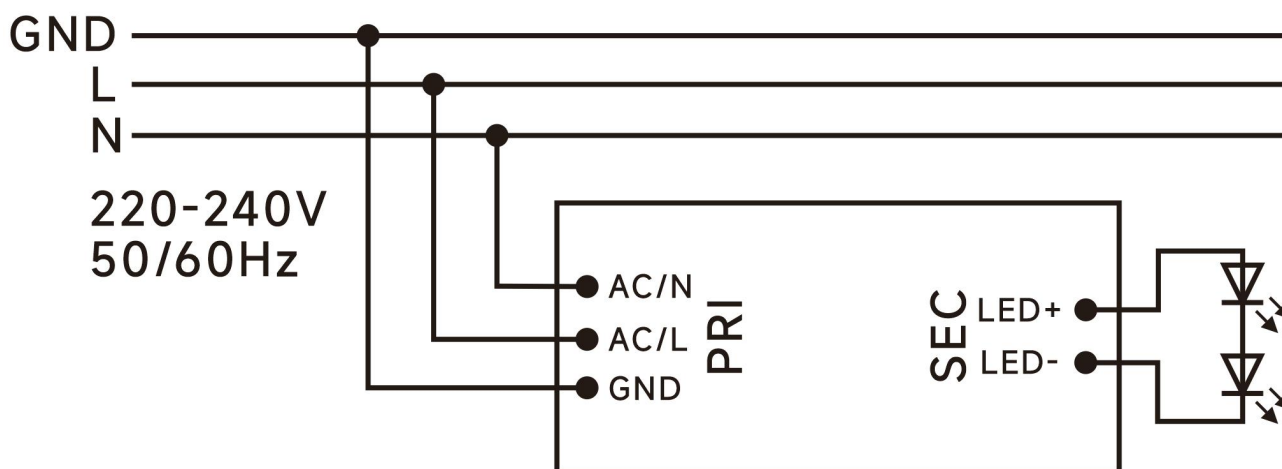

◆ 2D diagram

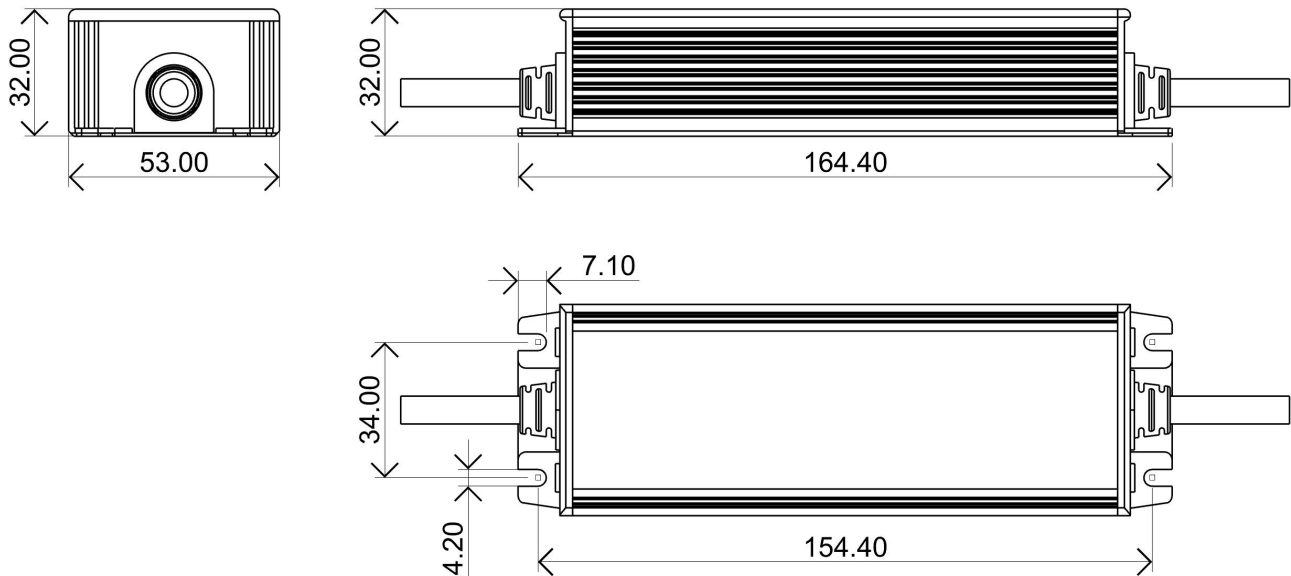

TYPE	Total Length	Outside Color	Inside Wires Color	Wire Model/Diameter
Input wire	300mm	Black	Brown/Blue/Yellow&Green	H05RN-F/3x1.0mm ²
Output wire	300mm	Black	Red/Black	H05RN-F/2x1.0mm ²


Note: Wire length of input and output can be changed as customer's requirement

◆ Packaging


Model	Product Dimensions(mm)	weight/piece	Outer carton dimension(mm)	Quantity/carton	Net weight/carton(Kg)	Gross weight/carton(Kg)
VMS-100-XX IP67 L EXC	164.4x53x32	0.5	370X275X215	25	12.5	13

◆ Curve for VMS-100-XX IP67 L EXC


Lifetime vs. Temperature Curve

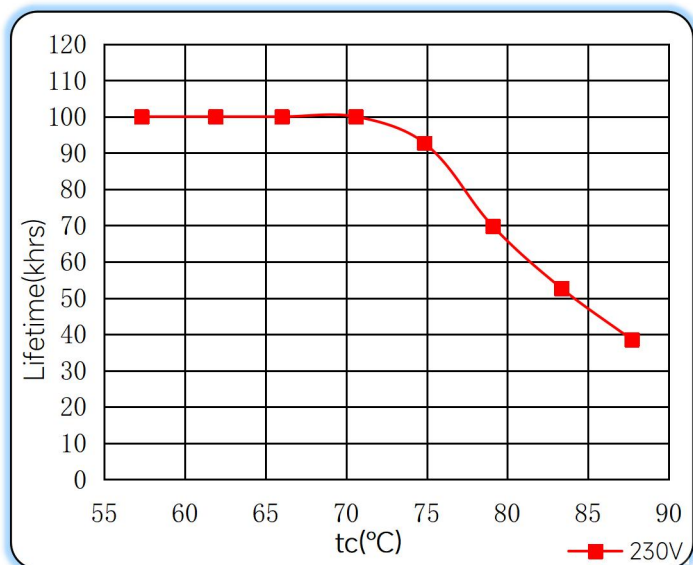


Efficiency vs. Load

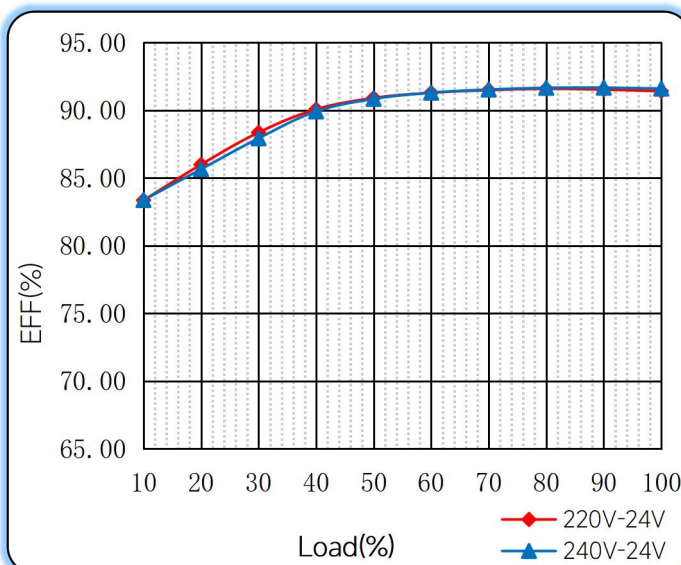


Power Factor Characteristics

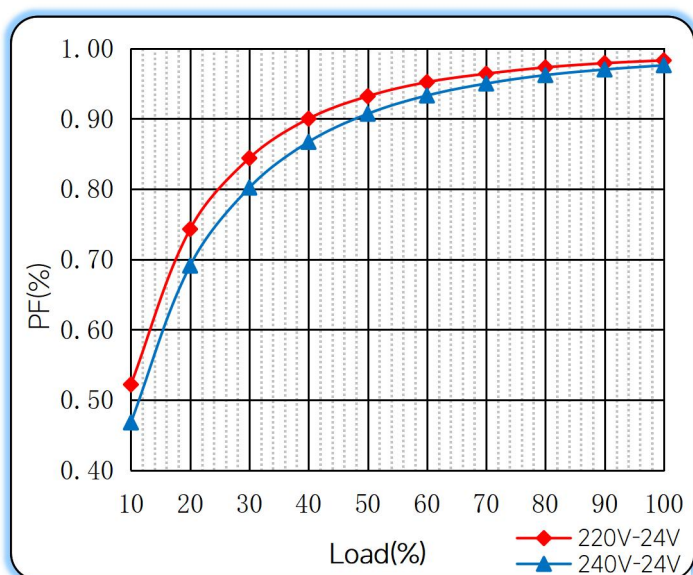


THD vs. Load

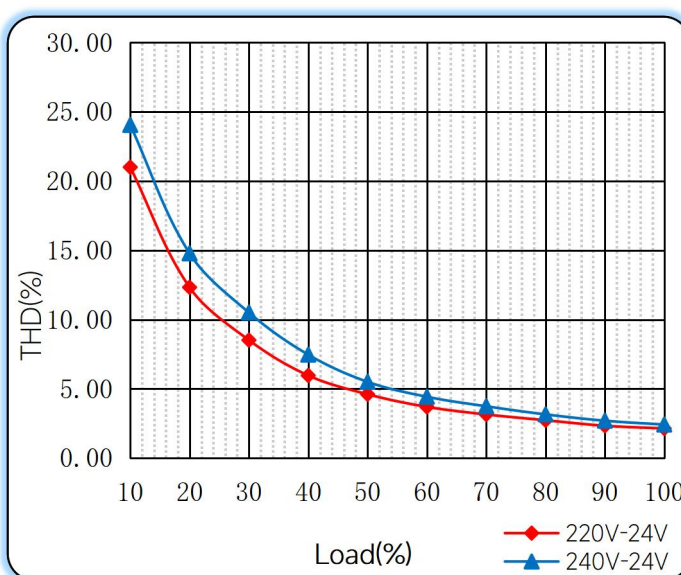

Load vs. Ta

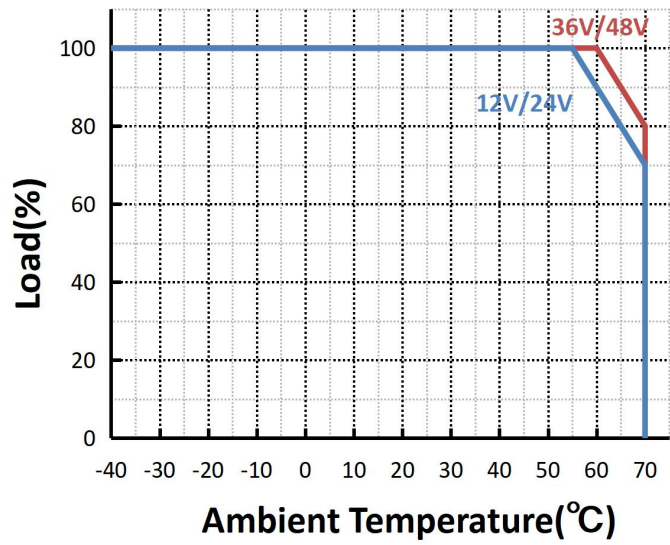

◆ Operating window

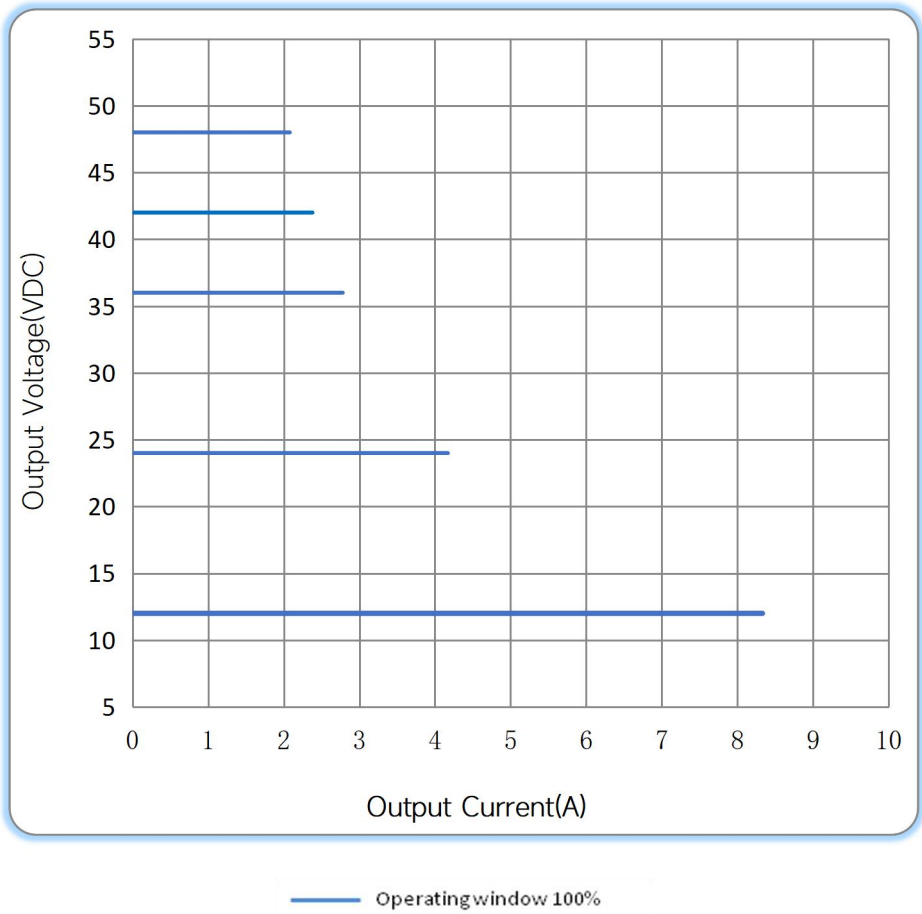

◆ Revision Updates

ITEM	BEFORE	AFTER	VERSION	DATE
Initial			A	2024/05/15
Operating Temperature	-40℃~+50℃	-40℃~+55℃	B	2025/06/05
Wiring diagram			C	2025/08/01

Remark:The final interpretation of the contents of the specification belongs to Eaglerise Electric & Electronic (China) Co., Ltd.

Tel: +86-0757-86256822, +86-0757-86256831
E-mail: sales@eaglerise.com
Website : <https://lighting.eaglerise.com>

