

42W DALI + PUSH Dimming power supply



■ Approve



Features

- For luminaries of protection Class I, II, SELV, built-in/independent (With side caps)
- Input Voltage: 220-240VAC
- Protections: SCP/OLP/OVP/OTP
- Power Factor: 0.95(Typ.)
- Efficiency: 87%(Typ.)
- EoFi=15%
- Support DALI-2, Push Dimming
- 5 years warranty


Applications

◆ Description

FLS-42-1050 DALI-2 LD ADV is a 42W constant current LED driver with 150 to 1050mA output current and a forward voltage range from 2.5 to 52Vdc. The output current is adjustable by DIP Switch. With it's dimensions from 97 x 43 x 30 mm it is easy to integrate in LED Panel and down light products. To ensure trouble-free operation, protection is provided against output short circuit and over Load.

◆ Model code

FLS-42-1050 DALI-2 LD ADV

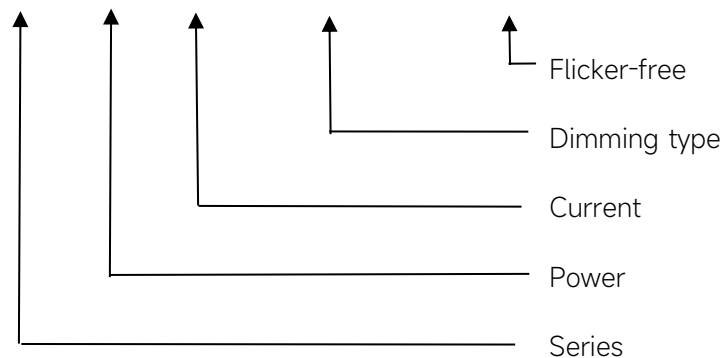

◆ Specification

Output	Constant Current (mA)	150mA	200mA		1000mA	1050mA
	Voltage Range(VDC)	2.5-52VDC	2.5-52VDC		2.5-42VDC	2.5-40VDC
	Unload voltage Max.(VDC)	59VDC				
	Current Accuracy	±5%				
	Output HF current ripple(≥1KHz)	±5%				
	Output LF current ripple(≤120Hz)	±3%				
	SVM	≤0.01@Full Load				
	P _{st}	≤0.05@Full Load				
	Efficiency(Typ.)	> 87%@full load				
Input	EOFi	15%				
	Rated input voltage(VAC)	220-240VAC				
	Range of input voltage(VAC)	198-264VAC				
	Range of input voltage(VDC)	198-280VDC				
	Frequency(Hz)	0/50/60 Hz				
	Displacement factor	≥0.9@full load				
	Power Factor	>0.95@full load				
	Input Current max	0.26A max				
	Start-up time	< 0.7S				
	No Load Power	≤0.5W				
	Standby Power	≤0.5W				
	THD (Typ.)	< 10%@full load				
Dimming	Dimming	YES				
	Dimming mode	DALI-2 (IEC 62386-101,102,207) & Push Dimming (Corridor Function) *				
	Dimming depth	1%				
	Dimming current range	1 ~100%				
Protection	Over Load Protection	103-120%				
		YES/Latch off				
	Over Voltage Protection	59VDC				
		YES/Latch off				
	Short circuit Protection	YES/Latch off				
Environment	Over Temperature Protection	YES/Auto Resume				
	Operating Temperature	-20°C~+45°C				
	Humidity	20%-90%RH				
	Tc	85°C				
	Storage Temperature	-40°C~+80°C				
Surface	Life time	> 50000h,@TC=85°C				
		97 x 43 x 30 mm (With side caps) : 131X43X30mm				

standards	EN 61347-1; EN61347-2-13; EN62384; EN55015; EN61000-3-2 ; EN61000-3-3; EN 61547;	
Others	ErP	EU 2019/2020
	RoHS	RoHS (2011/65/EU) (EU)2015/863
Note	1.All parameters NOT specially mentioned are measured at 230VAC input , full load and 25°C of ambient temperature. 2.Ripple & Noise are measured at 20MHz of bandwidth by using a 300mm twisted pair-wire terminated with a 0.1uF & 47 uF parallel capacitor. 3.The DC input for this product is only used for emergency lighting and applies to functional and safety requirements, EMC is not considered. *4.DALI protocol comprises 16 groups and 64 addresses.Up to 32 drivers can perform the PUSH dimming at the same time when utilizing one push button.	

◆ Parameter


Number	Output				Switch position			
	Current (mA)	Voltage (VDC)	Voltage No load (VDC)	Power (W)	1	2	3	4
1	150mA	2.5-52VDC	59VDC	7.8W	--	--	--	--
2	200mA			10.4W	ON	--	--	--
3	250mA			13W	--	ON	--	--
4	300mA			15.6W	ON	ON	--	--
5	350mA			18.2W	--	--	ON	--
6	400mA			20.8W	ON	--	ON	--
7	500mA			26W	--	ON	ON	--
8	600mA			31.2W	ON	ON	ON	--
9	700mA			36.4W	--	--	--	ON
10	750mA			39W	ON	--	--	ON
11	800mA			41.6W	--	ON	--	ON
12	850mA	2.5-49VDC		41.65W	ON	ON	--	ON
13	900mA	2.5-46VDC		41.4W	--	--	ON	ON
14	950mA	2.5-44VDC		41.8W	ON	--	ON	ON
15	1000mA	2.5-42VDC		42W	--	ON	ON	ON
*16	1050mA	2.5-40VDC		42W	ON	ON	ON	ON

* Factory default


◆ Circuit Breaker

I _{peak}	T _{width}	B10	B16	B20	C10	C16	C20
5.36A	48μs	30pcs	49pcs	61pcs	30pcs	49pcs	61pcs



◆ Wiring diagram

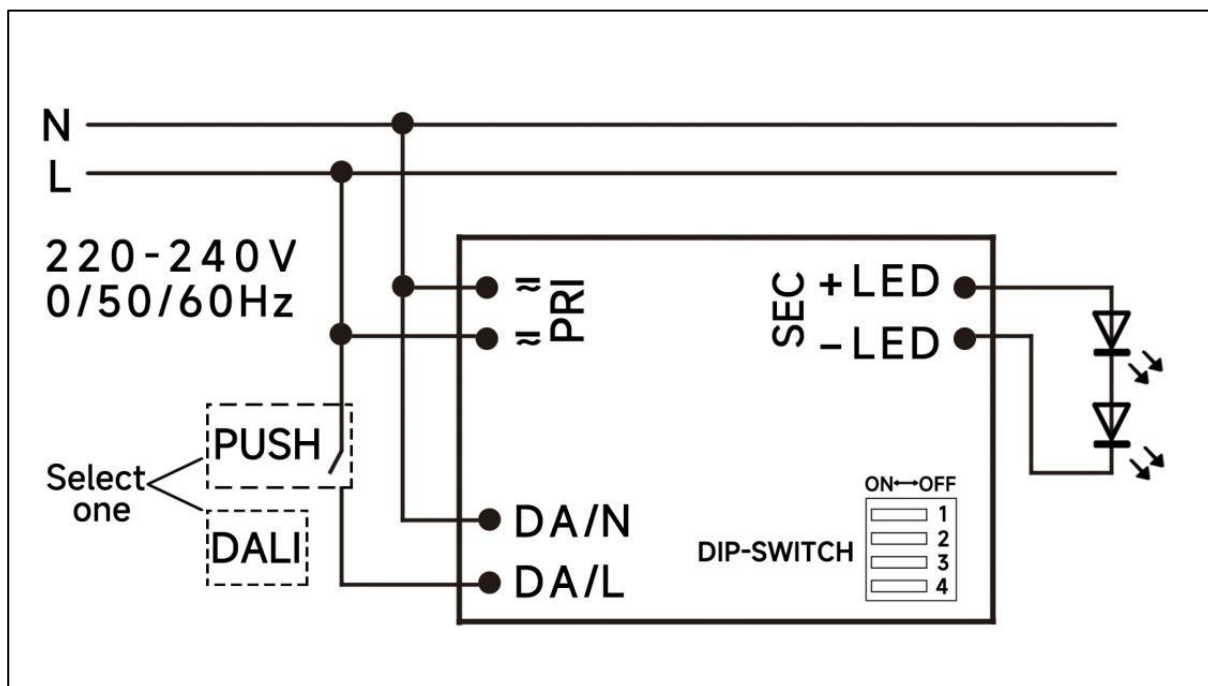

◆ 2D diagram

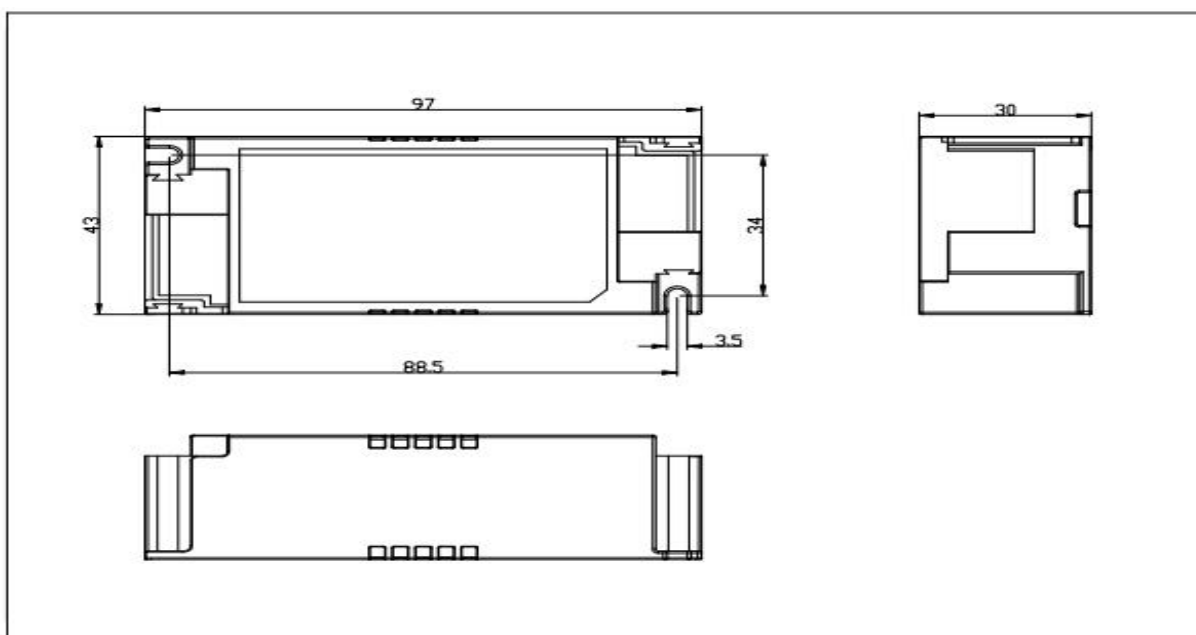

With side caps

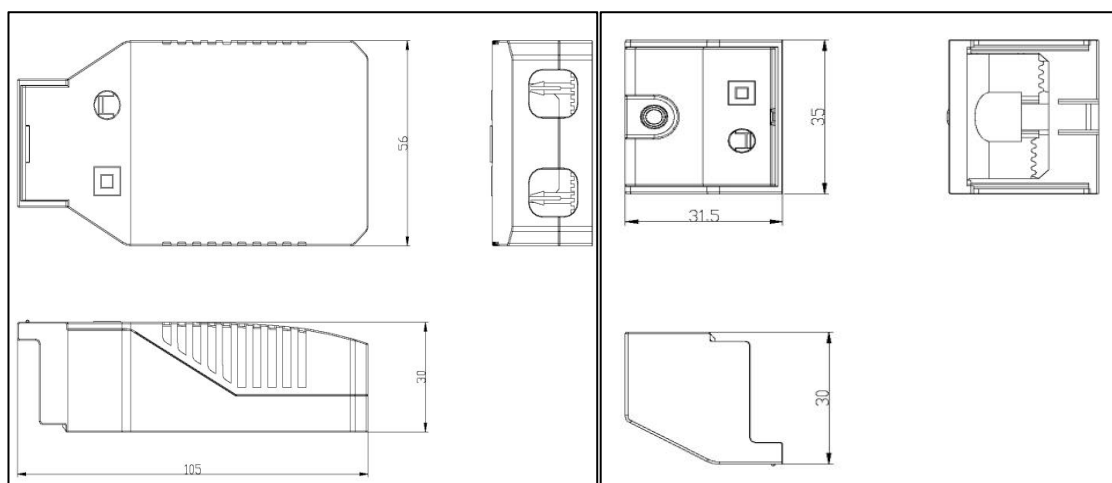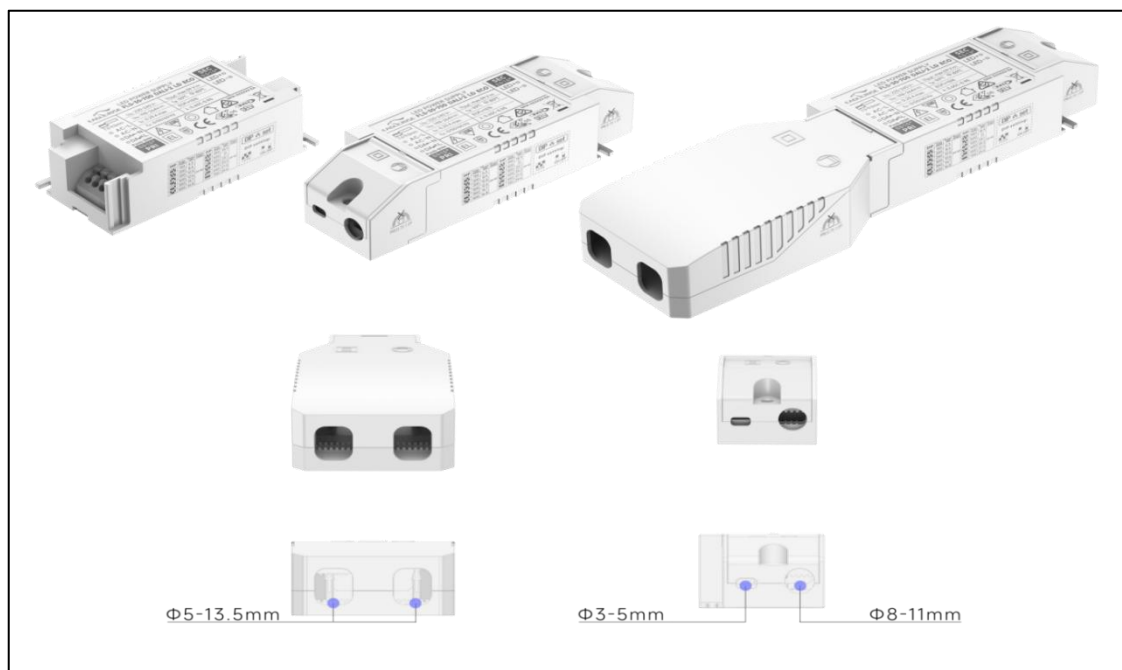

A caps


B caps

◆ Wiring & Connections


Specification item		Value (Unit)
Input	Input wire cross-section	0.5...1.5 mm ² (With A side caps: 0.75...2.5 mm ²)
	Input wire gauge.	16...20 AWG (With A side caps: 14...20 AWG)
	Input wire strip length	7...9mm
Output	Output wire cross-section	0.5...1.5 mm ²
	Output wire gauge.	16...20 AWG
	Output wire strip length	7...9mm

◆ Curve for FLS-42-1050 DALI-2 LD ADV, $I_o=1050\text{mA}$


Lifetime vs. Temperature Curve

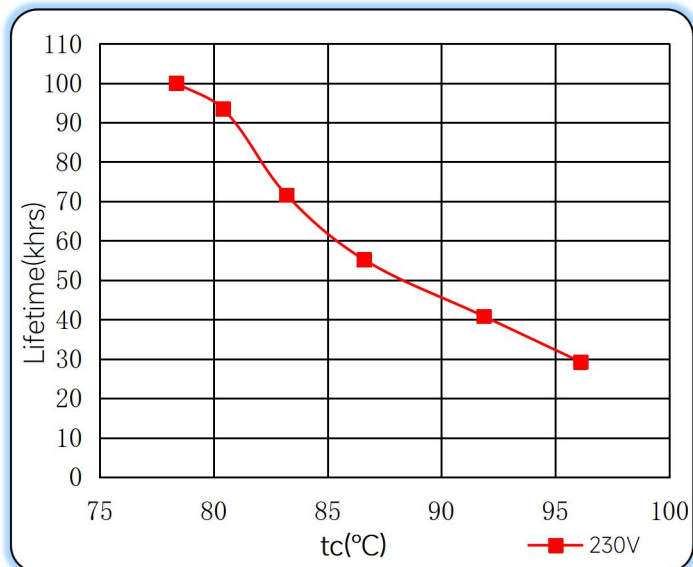


Efficiency vs. Load

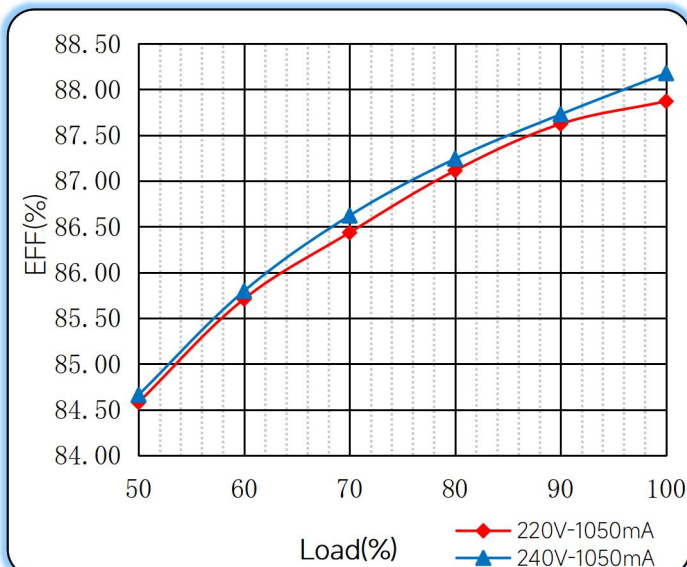


Power Factor Characteristics

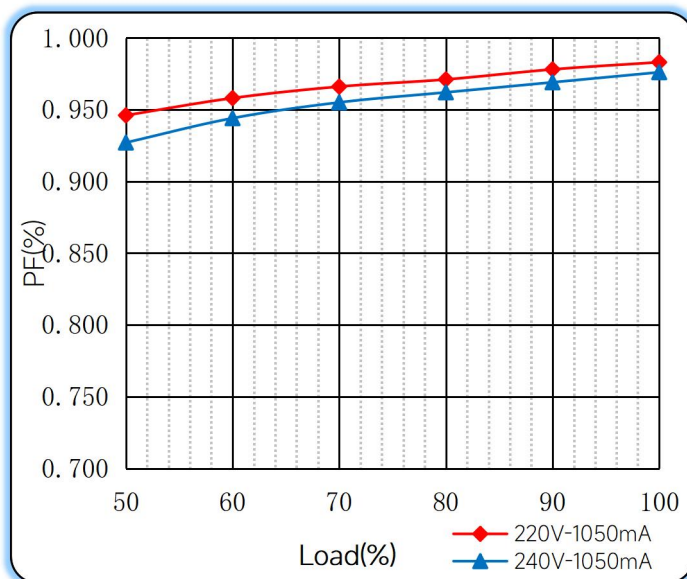

THD vs. Load

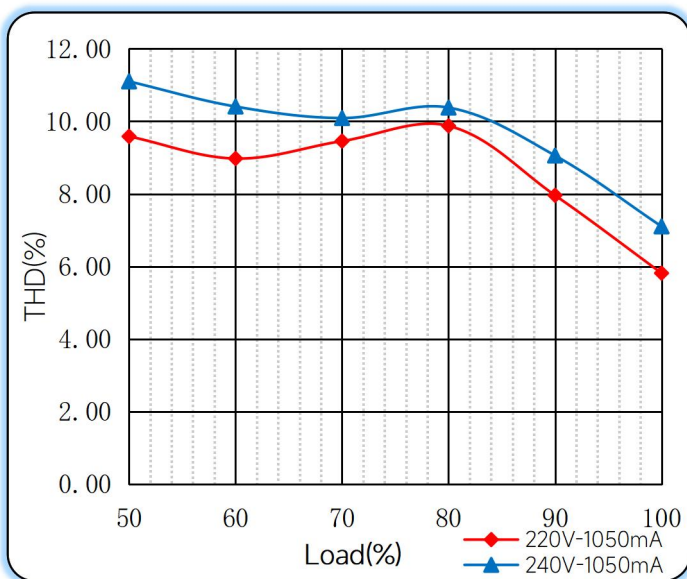

◆ Operating window

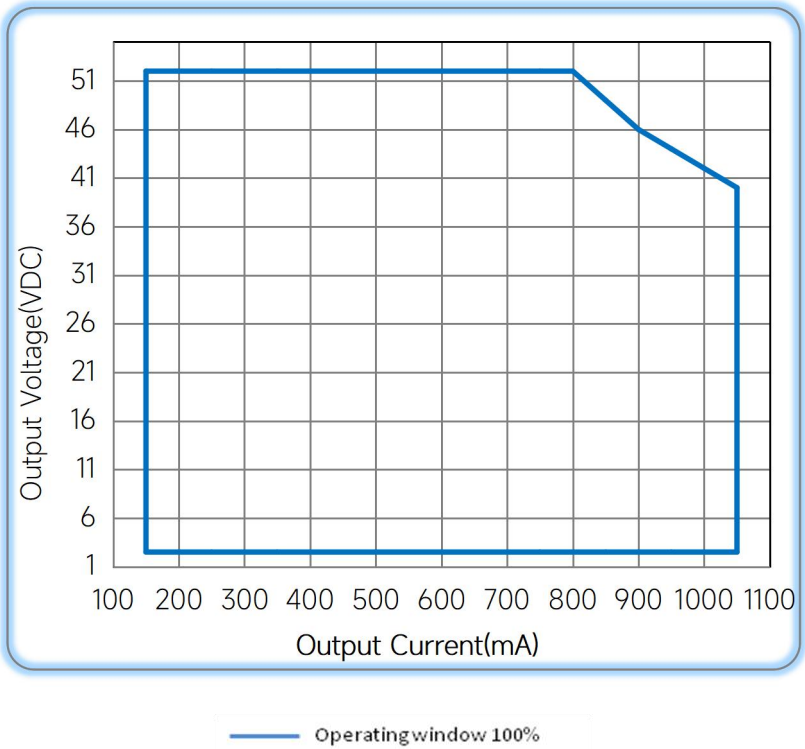

◆ Revision Updates

ITEM	BEFORE	AFTER	VERSION	DATE
Initial			A	2022/09/09
Protection		Latch off	B	2023/02/06

Tel: +86-0757-86256822, +86-0757-86256831
E-mail: sales@eaglerise.com
Website : <https://lighting.eaglerise.com>



EAGLERISE



Manual