



股票代码：002922

## 联系我们



微信公众号  
WeChat



微信视频号  
WeChat Channel



官方网站  
Website


地址/ Address:  
广东省佛山市顺德区北滘镇环镇东路4号  
No.4, Huanzhen East Road, Beijiao Town, Shunde District, Foshan, Guangdong, China

邮箱/ Email:  
Sales@eaglerise.com

网址/ Web:  
Lighting-eaglerise.com

## 产品图册 LED驱动电源 室内

2026

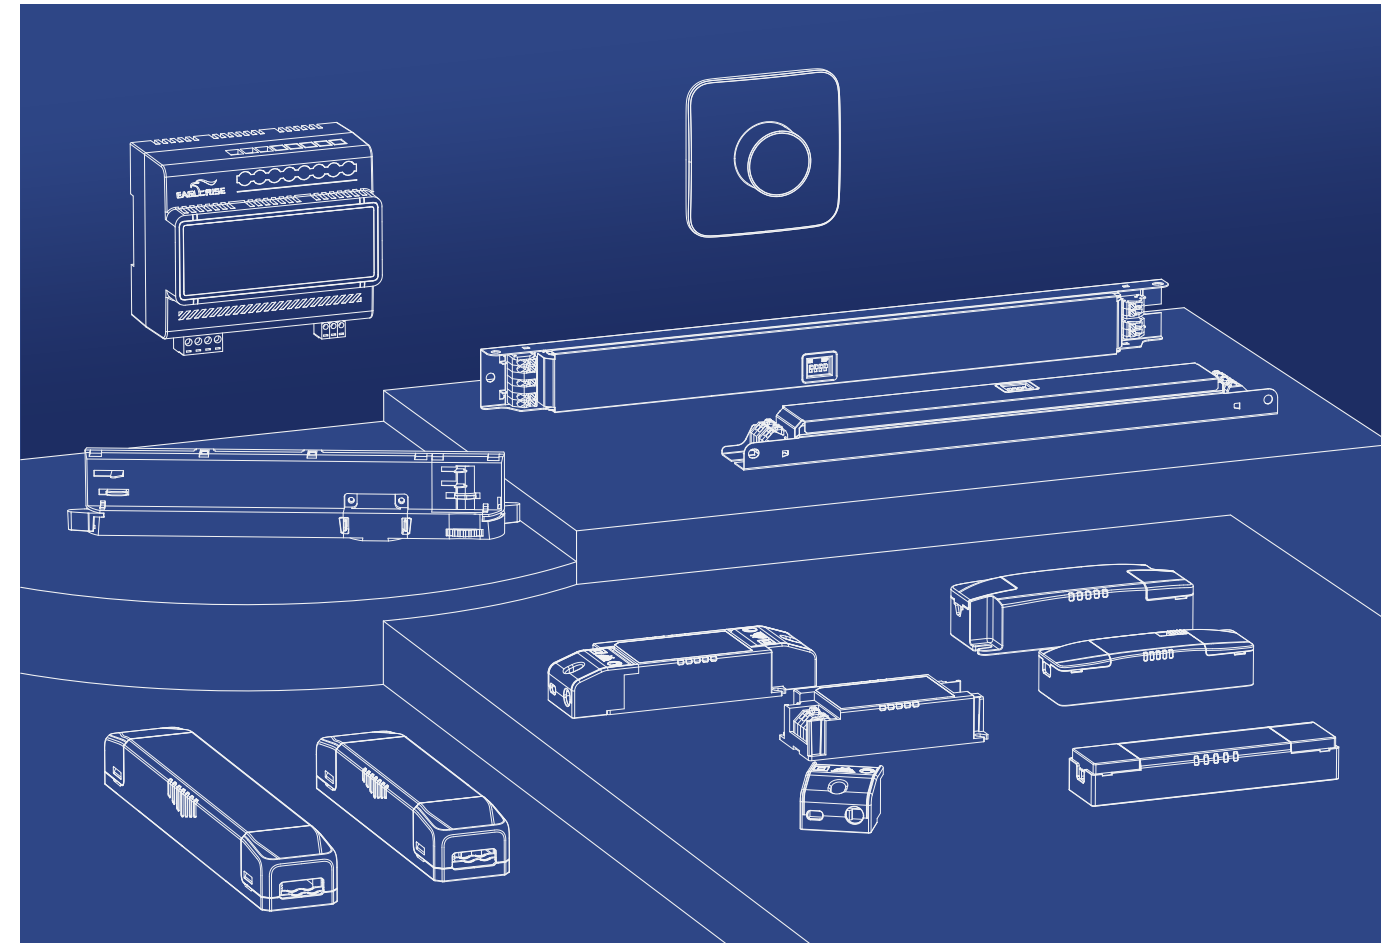

# 目录 CONTENTS

## 企业介绍

|       |       |
|-------|-------|
| 关于伊戈尔 | 1-2   |
| 产品历程  | 3     |
| 项目案例  | 4     |
| 企业实力  | 5-6   |
| 接线图例  | 7     |
| 命名规则  | 8     |
| 产品概览  | 9-10  |
| 产品选型表 | 11-26 |

## 产品分类

01

线性

非隔离DALI

28-30

非隔离ON/ OFF

31-32

隔离DALI

33-34

非隔离ON/ OFF

35-37

02

紧凑型

DALI-2

39

0-10V

40

可控硅

41-45

无线

46

高效

47

Silm

48

CCT

49-50

热销

51-53

高PF

54-56

宽电压

57-58

圆形

59-62

带引线

63-66

03

迷你型

DALI+0-10V

68

DALI-DT8

69

DALI-2

70-75

0-10V

76

无线

77

ON/ OFF

78-81

|    |          |       |
|----|----------|-------|
| 04 | 导轨电源     |       |
|    | DALI-DT8 | 83    |
|    | DALI-2   | 84-85 |
|    | CASAMBI  | 86    |
|    | ON/ OFF  | 87-91 |
|    | 四线       | 92    |

05

|            |         |
|------------|---------|
| 恒压         |         |
| DALI 0-10V | 94      |
| DALI-DT8   | 95      |
| DALI-2     | 96-97   |
| 0-10V      | 98      |
| ON/OFF     | 99-101  |
| 超薄         | 102-103 |
| 带引线        | 104     |
| IP67       | 105     |

|    |       |     |
|----|-------|-----|
| 06 | 美规    |     |
|    | 可控硅   | 107 |
|    | 0-10V | 108 |

|    |         |         |
|----|---------|---------|
| 07 | 配件 & 附表 |         |
|    | DALI 配件 | 110-113 |
|    | 可选配件    | 114-115 |
|    | 新旧产品替换表 | 116     |

# 关于伊戈尔

## About EAGLERISE



# 1999

伊戈尔在佛山成立  
Established in Foshan

# 2017

成功在深圳上市  
Listed in Shenzhen

# 45万 m<sup>2</sup>

拥有标准厂房4.5W m<sup>2</sup>  
Company Area 45K m<sup>2</sup>

# 300 +



专利应用  
Patents & applications

伊戈尔创立于1999年，总部位于广东佛山，于2017年正式上市，股票代码：002922。旗下照明电源事业部成立于2001年，专注深耕照明电源产品的研发、制造、销售和服务，在佛山顺德和江西吉安两地拥有2大生产制造基地，总面积4.5万平方米。凭借强大的研发实力，数字化生产制造平台，在照明电源领域推陈出新，产品覆盖家居照明、商业照明、酒店照明、户外照明灯照明场景，为全球客户提供更高效、更智能、更绿色的LED驱动电源于照明解决方案。

Eaglerise Electric & Electronic (China) Co., Ltd was founded in 1999 and headquartered in Foshan. Eaglerise was officially listed in 2017 with the stock code 002922. Our Lighting Business Unit was established in 2001, focusing on the research and development, manufacturing, sales, and service of LED driver. We have two manufacturing bases in Shunde, Foshan and Ji'an, Jiangxi, 45000 sqm in total. With strong R&D and digital manufacturing plants, our products cover lighting scenarios such as home lighting, commercial lighting, hotel lighting, and outdoor lighting. We aim to provide global customers with more efficient, intelligent, and eco-friendly LED driver and lighting solutions.

# 产品 历程

## PRODUCT HISTORY

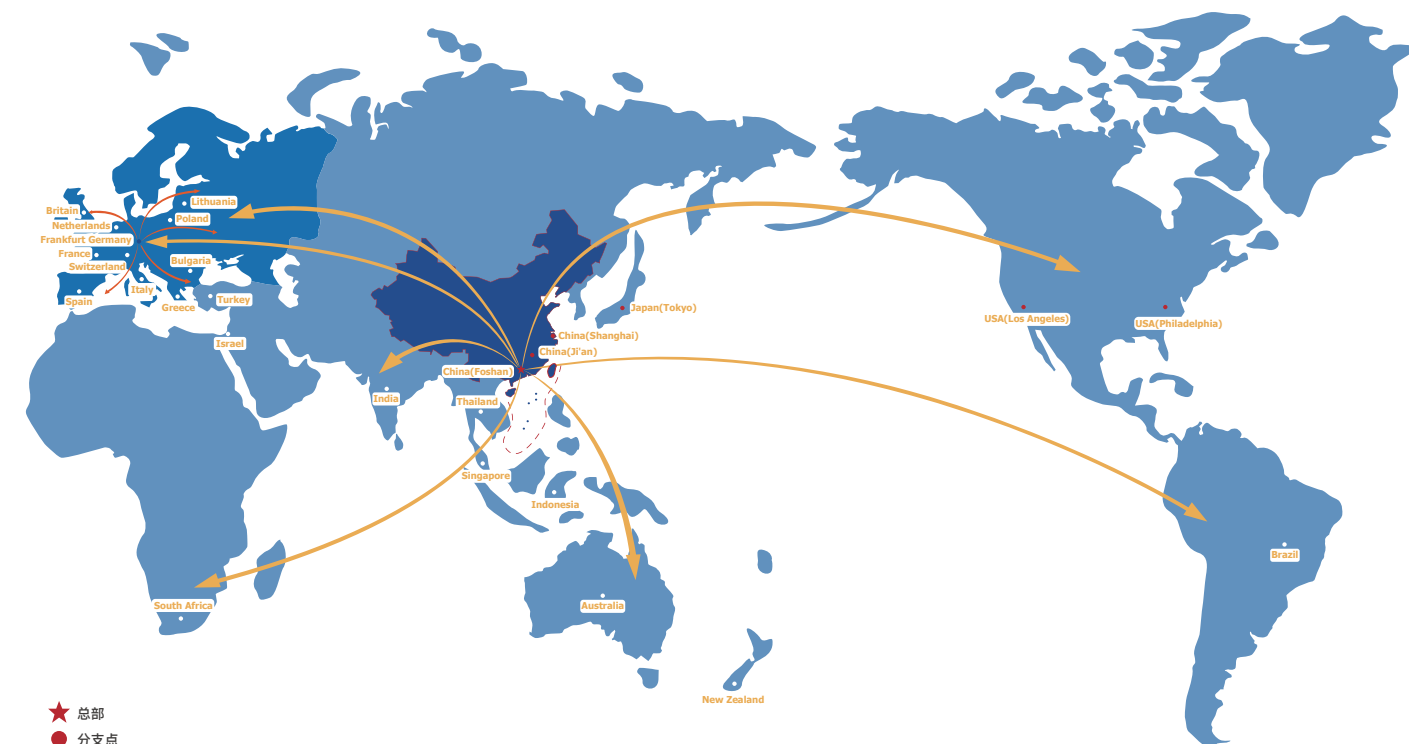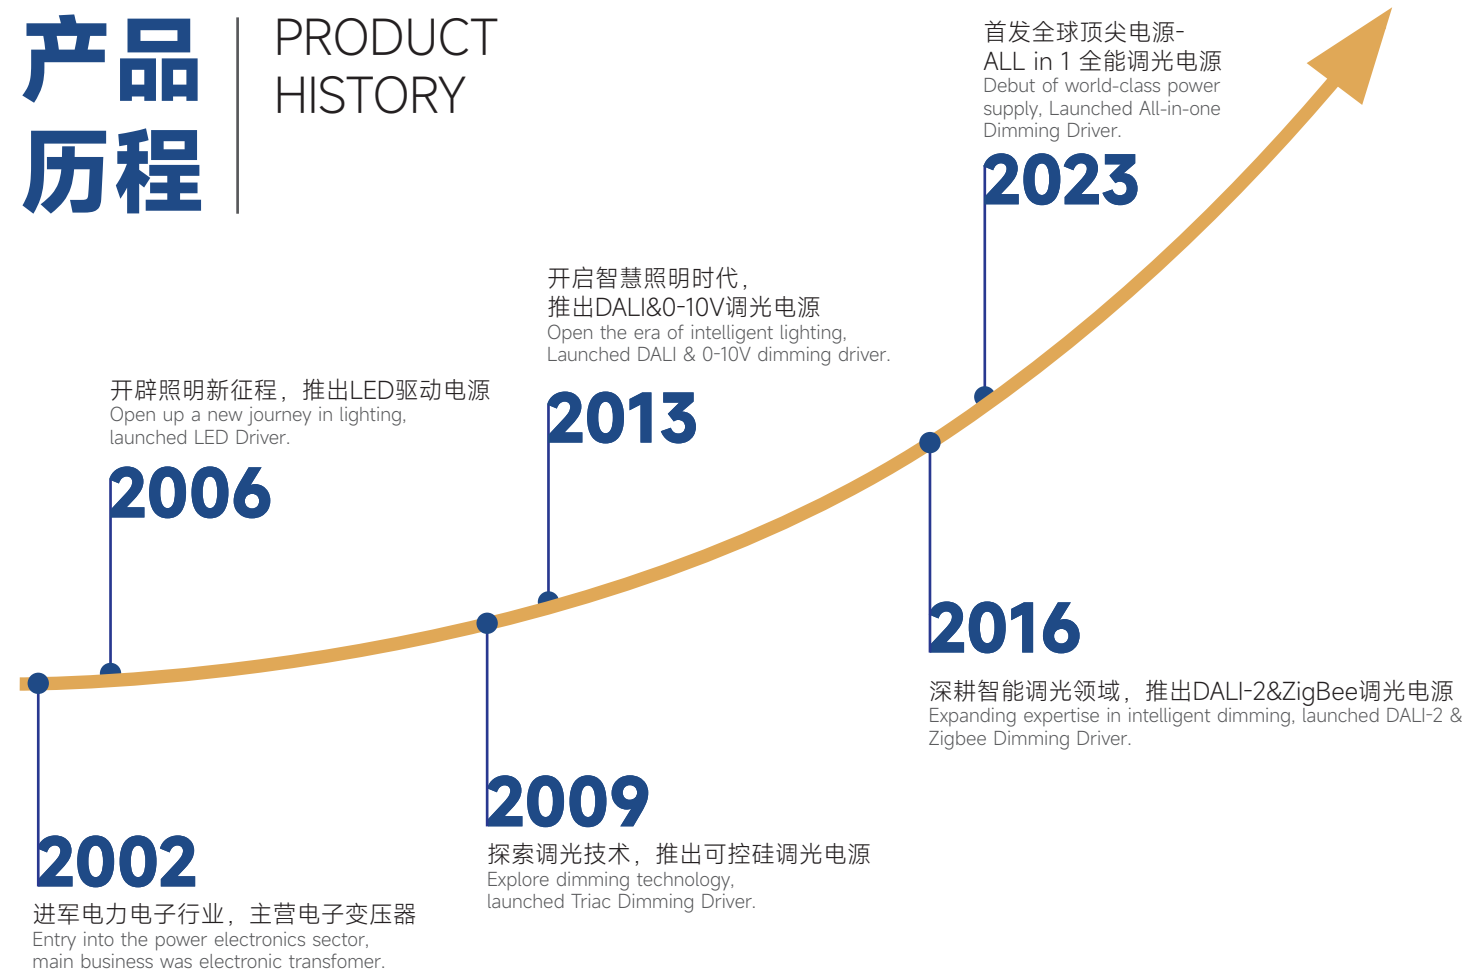

# 项目 案例

## SUCCESSFUL CASES



# 企业实力 | PRODUCT HISTORY

 **26** Years of experience

26年专业LED驱动电源经验，  
沉淀，才能带来更好的产品。

 **300+** Patents & applications

300+专利及应用  
核心技术，只为更优质的产品

 **100+** Served countries & regions

服务遍及全球100多个国家及地区的客户  
依托经销商模式，实现全球快速响应

 **82 million(pcs)** Annual capacity






年产能8200万台  
质量可靠的优质驱动电源

 **45000m<sup>2</sup>** Company area

厂房占地4.5万方  
自动化生产，交付更及时

 **1200+** Skilled employees


1200余名员工  
全新全意打造每一款LED驱动电源

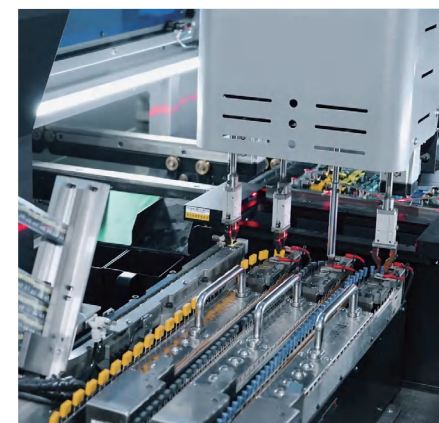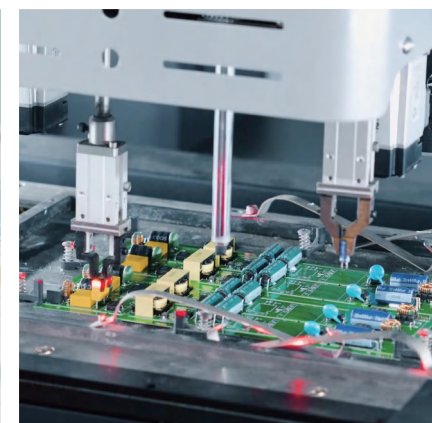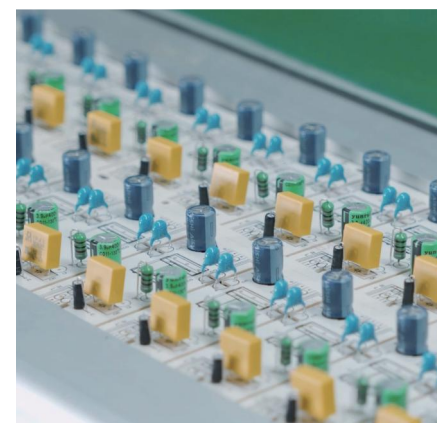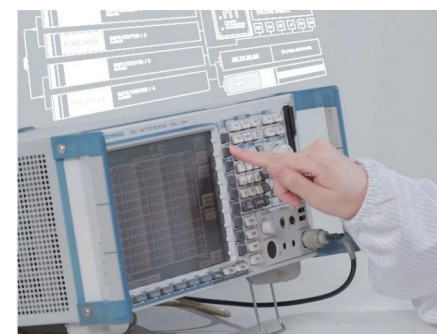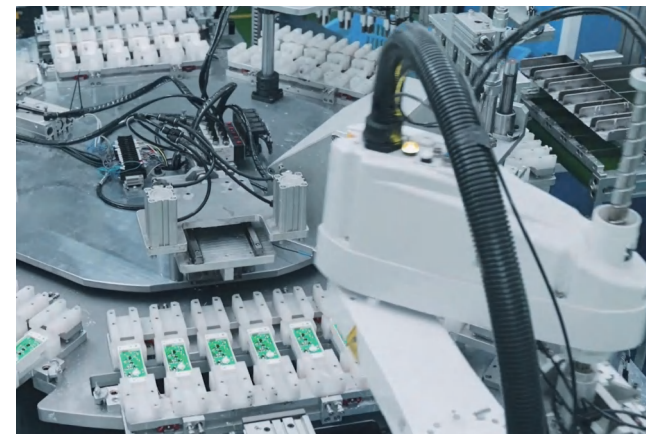


# 接线图例

SUCCESSFUL CASES


## DALI调光应用

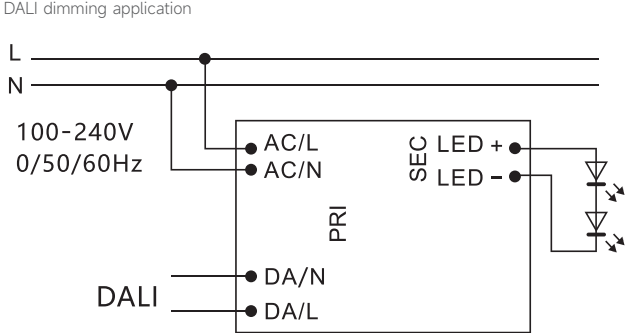


## PUSH调光应用

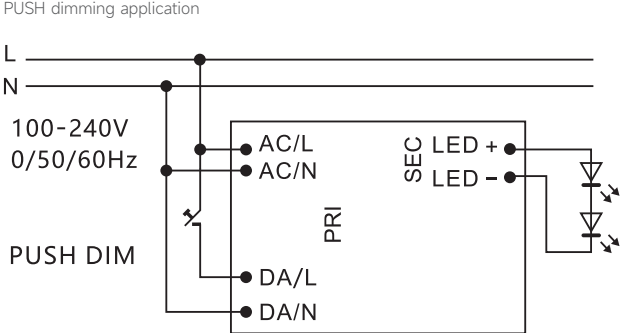


## DALI-2 DT8调光应用

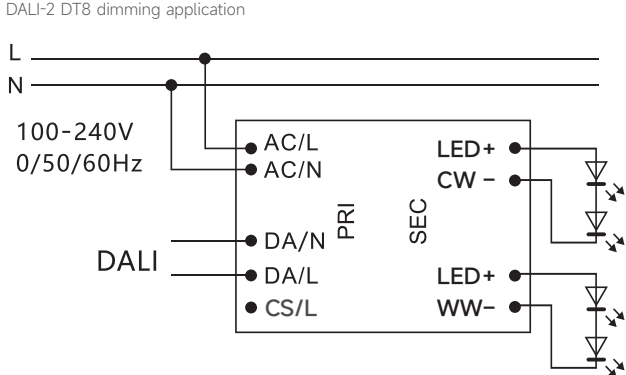


## 走廊模式调光应用

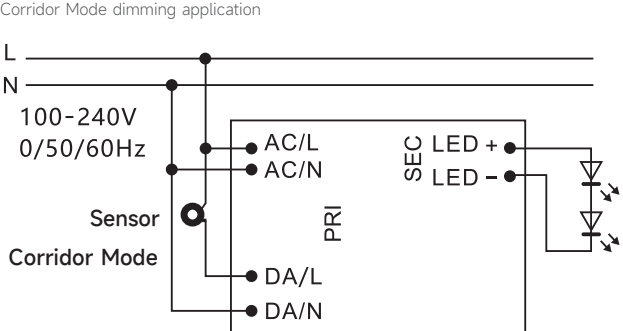

## 可控硅调光应用

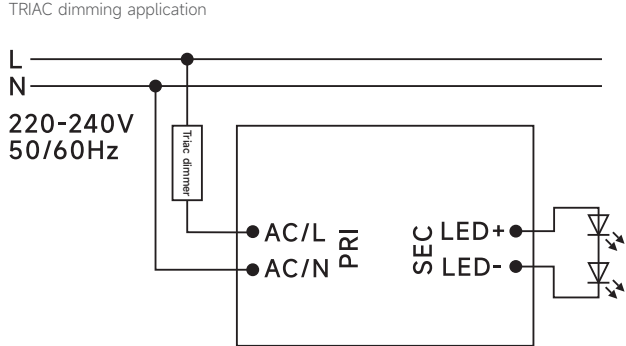

## 0-10V调光应用

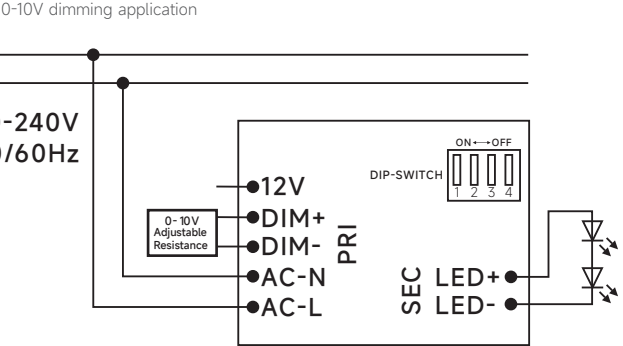

# 命名规则

SUCCESSFUL CASES

| FLS-30-700 IP67 N-S DALI-2 LI1 EXC S -YX                      |  |
|---------------------------------------------------------------|--|
| 电流可调<br>Adjustable or not                                     |  |
| F 输出电流可调<br>Output current adjustable                         |  |
| 形状<br>Shape                                                   |  |
| C 圆形<br>Circle                                                |  |
| L 普通长条形 (长宽比>2.0)<br>Long Rectangles (2.0<L:W<4.0)            |  |
| S 方形塑料 (长宽比<2.0)<br>Square Plastic (L:W<2.0)                  |  |
| M 金属外壳<br>Metal Rectangles                                    |  |
| N 裸板, 无外壳<br>Bare board, no shell                             |  |
| D 导轨一体外壳<br>Integrated                                        |  |
| U 超薄型电源<br>Ultrathin (height less than 18mm)                  |  |
| R 椭圆、马蹄形<br>Oval, horseshoe shape                             |  |
| 输入电压<br>Input Voltage                                         |  |
| S 220-240 VAC                                                 |  |
| H 100-240 VAC                                                 |  |
| E 100-120 VAC                                                 |  |
| X 100-277 VAC                                                 |  |
| N USA 120 VAC                                                 |  |
| W USA 120-277 VAC                                             |  |
| Z USA 120-347 VAC                                             |  |
| 输出功率<br>Output Power                                          |  |
| 9 9W                                                          |  |
| 30 30W                                                        |  |
| 1200 1200W                                                    |  |
| 输出电流/电压<br>Output Current/ Voltage                            |  |
| 恒流型C.C.: 120--120mA / 1050--1050mA                            |  |
| 恒压型C.V.: 5--5V / 12--12V / 24-24V                             |  |
| IP等级 (可选)<br>IP Grade (optional)                              |  |
| IP20 默认为空 Defaultly empty                                     |  |
| IP65 IP65                                                     |  |
| IP67 IP67                                                     |  |
| [N-S] 非隔离 (可选)<br>[N-S] Non-isolation(optional)               |  |
| 调光功能位 (可选)<br>Dimming Mode (optional)                         |  |
| DALI-2 DALI调光 DALI Dimming                                    |  |
| 0-10 0-10V调光 0-10V Dimming                                    |  |
| 1-10 (欧洲) 1-10V调光 1-10V Dimming                               |  |
| 客户简称<br>Customer Abbreviation                                 |  |
| 为专门的客户做的定制品<br>Custom products made for special customers     |  |
| 更改外观 (可选)<br>Change Appearance (Optional)                     |  |
| S 外观尺寸变小, 更小/窄<br>Appearance size reduced, small/slim         |  |
| 产品版本号 (可选)<br>Version (optional)                              |  |
| E 基础版本 Basic version                                          |  |
| EXC 基础版本PF>0.9 Basic version, 0.9 PF                          |  |
| ADV 升级版 Advanced version                                      |  |
| PRO 高级版本 Professional version                                 |  |
| 迭代号 (可选)<br>Generation Number (optional)                      |  |
| 1 第一代 First generation                                        |  |
| 2 第二代 Second generation                                       |  |
| 输出调节方式端子台&线缆<br>Output Adjustment Mode Terminal & Cable       |  |
| 输出电流不可调:<br>Output current not adjustable:                    |  |
| I 端子台/独立式 Terminal/ Independent                               |  |
| X 端子台/内置式 Terminal/ Built-in                                  |  |
| B 引线/ 内置式 Cable/ Built-in                                     |  |
| R 双L双N 2 slots                                                |  |
| 输出电流可调:<br>Output current adjustable:                         |  |
| A 拨码/端子台/独立式 Dip switch/ Terminal/ Independent                |  |
| S 拨码/端子台/独立式/双L双N Dip switch/ 2 slots                         |  |
| N NFC/端子台/内置式 NFC/ Terminal/ Built-in                         |  |
| D 拨码/端子台 Dip switch/ Terminal/ Built-in                       |  |
| 功率因数与频闪结合位<br>Power Factor & Flicker                          |  |
| L 0.9PF和无频闪 0.9PF & flicker-free                              |  |
| M 0.8PF和无频闪 0.8PF & flicker-free                              |  |
| S 0.5PF和无频闪 0.5PF & flicker-free                              |  |
| R 0.9PF和频闪 0.9PF & flicker                                    |  |
| 调光功能位 (可选)<br>Dimming Mode (optional)                         |  |
| Blue 蓝牙调光 Bluetooth Dimming                                   |  |
| CSB CASAMBI调光 Casambi Dimming                                 |  |
| Zigb Zigbee调光 Zigbee Dimming                                  |  |
| PWM PWM调光 PWM Dimming                                         |  |
| RF 射频调光 RF Dimming                                            |  |
| TRIAC 三端双向可控硅调光 TRIAC Dimming                                 |  |
| DT8 DALI调光、色温可调 DALI Dimming; color temperature is adjustable |  |
| CCT 色温可调 Color temperature is adjustable                      |  |

产品概述

PRODUCT HISTORY

|                |                     |                     |            |     |     |
|----------------|---------------------|---------------------|------------|-----|-----|
| 线性<br>Linear   | 非隔离<br>Non-Isolated | D4i                 |            | P28 |     |
|                |                     | DALI-2              |            | P29 |     |
|                |                     | ON/OFF (Dip switch) |            | P31 |     |
|                | 隔离<br>Isolated      | DALI-2              |            | P33 |     |
|                |                     | ON/OFF (Dip switch) |            | P35 |     |
| 紧凑型<br>Compact | 智能<br>Intelligent   | DALI-2              |            | P39 |     |
|                |                     | 0-10V               |            | P40 |     |
|                |                     | Triac               |            | P41 |     |
|                |                     | Wireless            |            | P46 |     |
|                | ON/OFF              | High eff.           |            | P47 |     |
|                |                     | Silm                |            | P48 |     |
|                |                     | CCT                 |            | P49 |     |
|                |                     | Hot Sale            |            | P51 |     |
|                |                     | High PF             |            | P54 |     |
|                |                     | Wide Voltage        |            | P57 |     |
|                |                     | Round               |            | P59 |     |
|                |                     | Lead Wire           |            | P63 |     |
|                | 迷你型<br>Mini         | 智能<br>Intelligent   | DALI+0-10V |     | P68 |
|                |                     |                     | DALI-2 DT8 |     | P69 |
|                |                     |                     | DALI-2     |     | P70 |
|                |                     |                     | 0-10V      |     | P76 |
|                |                     |                     | CASAMBI    |     | P77 |
|                |                     | ON/OFF              | High eff.  |     | P78 |
| CCT            |                     |                     |            | P79 |     |
| Dip Switch     |                     |                     |            | P80 |     |

|                       |                   |                   |              |             |      |      |
|-----------------------|-------------------|-------------------|--------------|-------------|------|------|
| 导轨电源                  | 智能<br>Intelligent |                   | DALI-2 DT8   |             | P83  |      |
|                       |                   |                   | DALI-2       |             | P84  |      |
|                       |                   |                   | CASAMBI      |             | P86  |      |
|                       | ON/OFF            |                   | ON/OFF       |             | P87  |      |
|                       |                   |                   | Three Phase  |             | P92  |      |
| 恒 压<br>C V            | 智能<br>Intelligent |                   | DALI+0-10V   |             | P94  |      |
|                       |                   |                   | DALI-2 DT8   |             | P95  |      |
|                       |                   |                   | DALI-2       |             | P96  |      |
|                       |                   |                   | 0-10V        |             | P98  |      |
|                       | ON/OFF            |                   | Silm         |             | P99  |      |
|                       |                   |                   | Ultrathin    |             | P102 |      |
|                       |                   |                   | Lead wire    |             | P104 |      |
|                       |                   |                   | IP67         |             | P105 |      |
|                       |                   | 智能<br>Intelligent |              | 0-10V+Triac |      | P107 |
|                       |                   |                   |              | Triac       |      | P108 |
| 美 规<br>North American |                   |                   |              |             |      |      |
|                       |                   |                   |              |             |      |      |
| 配 件<br>Accessories    |                   |                   | DALI Gateway |             | P110 |      |
|                       |                   |                   | DALI Dimmer  |             | P111 |      |
|                       |                   |                   | DALI Panel   |             | P112 |      |
|                       |                   |                   | DALI Sensor  |             | P113 |      |



紧凑型 COMPACT

| Intelligent<br>- TRIAC                                                              | 型号                     | 功率    | 输入电压          | 输出电流              | 输出电压           | 效率         | 功率因数         | 尺寸            |
|-------------------------------------------------------------------------------------|------------------------|-------|---------------|-------------------|----------------|------------|--------------|---------------|
|                                                                                     | Model                  | Power | Input Voltage | Output Current    | Output Voltage | Efficiency | Power Factor | Size (L*W*H)  |
|    | LS-8-120 TRIAC LI EXC  | 8W    | 220-240VAC    | 120mA             | 27-40V         | 75%        | 0.9          | 115*30*20.5mm |
|                                                                                     | LS-8-200 TRIAC LI EXC  | 8W    | 220-240VAC    | 200mA             | 27-40V         | 80%        | 0.9          | 115*30*20.5mm |
|                                                                                     | LS-8-220 TRIAC LI EXC  | 8W    | 220-240VAC    | 220mA             | 27-40V         | 83%        | 0.9          | 115*30*20.5mm |
|                                                                                     | LS-12-250 TRIAC LI EXC | 12W   | 220-240VAC    | 250mA             | 27-40V         | 83%        | 0.95         | 115*30*20.5mm |
|                                                                                     | LS-12-300 TRIAC LI EXC | 12W   | 220-240VAC    | 300mA             | 27-40V         | 83%        | 0.95         | 115*30*20.5mm |
| Page 41                                                                             | LS-12-350 TRIAC LI EXC | 12W   | 220-240VAC    | 350mA             | 27-40V         | 83%        | 0.95         | 115*30*20.5mm |
|    | CS-8-100 TRIAC LI      | 8W    | 220-240VAC    | 100mA             | 28-40V         | 78%        | 0.9          | Φ56*25.5mm    |
|                                                                                     | CS-8-120 TRIAC LI      | 8W    | 220-240VAC    | 120mA             | 28-40V         | 80%        | 0.9          | Φ56*25.5mm    |
|                                                                                     | CS-8-150 TRIAC LI      | 8W    | 220-240VAC    | 150mA             | 28-40V         | 80%        | 0.95         | Φ56*25.5mm    |
|                                                                                     | CS-8-180 TRIAC LI      | 8W    | 220-240VAC    | 180mA             | 28-40V         | 80%        | 0.95         | Φ56*25.5mm    |
|                                                                                     | CS-8-200 TRIAC LI      | 8W    | 220-240VAC    | 200mA             | 28-40V         | 80%        | 0.95         | Φ56*25.5mm    |
|                                                                                     | CS-15-250 TRIAC LI     | 15W   | 220-240VAC    | 250mA             | 28-40V         | 82%        | 0.9          | Φ65*25mm      |
|                                                                                     | CS-15-280 TRIAC LI     | 15W   | 220-240VAC    | 280mA             | 28-40V         | 82%        | 0.9          | Φ65*25mm      |
|                                                                                     | CS-15-300 TRIAC LI     | 15W   | 220-240VAC    | 300mA             | 28-40V         | 82%        | 0.95         | Φ65*25mm      |
|                                                                                     | CS-15-350 TRIAC LI     | 15W   | 220-240VAC    | 350mA             | 28-40V         | 82%        | 0.95         | Φ65*25mm      |
|                                                                                     | CS-22-XXX TRIAC LI     | 22W   | 220-240VAC    | 400-550mA         | 28-40V         | 85%        | 0.95         | Φ65*25mm      |
| Page 42                                                                             | CS-36-XXX TRIAC LI     | 36W   | 220-240VAC    | 600-900mA         | 28-40V         | 85%        | 0.95         | Φ75*26mm      |
|  | LS-8-100 TRIAC LI1     | 8W    | 220-240VAC    | 100mA             | 28-40V         | 78%        | 0.9          | 92*36*25mm    |
|                                                                                     | LS-8-120 TRIAC LI1     | 8W    | 220-240VAC    | 120mA             | 28-40V         | 80%        | 0.9          | 92*36*25mm    |
|                                                                                     | LS-8-150 TRIAC LI1     | 8W    | 220-240VAC    | 150mA             | 28-40V         | 80%        | 0.95         | 92*36*25mm    |
|                                                                                     | LS-8-180 TRIAC LI1     | 8W    | 220-240VAC    | 180mA             | 28-40V         | 80%        | 0.95         | 92*36*25mm    |
|                                                                                     | LS-8-200 TRIAC LI1     | 8W    | 220-240VAC    | 200mA             | 28-40V         | 80%        | 0.95         | 92*36*25mm    |
|                                                                                     | LS-8-220 TRIAC LI1     | 8W    | 220-240VAC    | 220mA             | 28-40V         | 80%        | 0.95         | 92*36*25mm    |
|                                                                                     | LS-8-250 TRIAC LI1     | 8W    | 220-240VAC    | 250mA             | 18-24V         | 80%        | 0.95         | 92*36*25mm    |
|                                                                                     | LS-8-300 TRIAC LI1     | 8W    | 220-240VAC    | 300mA             | 18-24V         | 80%        | 0.95         | 92*36*25mm    |
|                                                                                     | LS-8-350 TRIAC LI1     | 8W    | 220-240VAC    | 350mA             | 18-24V         | 80%        | 0.95         | 92*36*25mm    |
| Page 43                                                                             | LS-8-700 TRIAC LI1     | 8W    | 220-240VAC    | 700mA             | 8-11.4V        | 76%        | 0.95         | 92*36*25mm    |
|  | LS-15-XXX TRIAC LI1    | 15W   | 220-240VAC    | 250/280/300/350mA | 28-40V         | 82%        | 0.95         | 102*38.2*25mm |
|                                                                                     | LS-15-400 TRIAC LI1    | 15W   | 220-240VAC    | 400mA             | 25-38V         | 82%        | 0.95         | 102*38.2*25mm |
|                                                                                     | LS-15-450 TRIAC LI1    | 15W   | 220-240VAC    | 450mA             | 22-33V         | 82%        | 0.95         | 102*38.2*25mm |
|                                                                                     | LS-15-500 TRIAC LI1    | 15W   | 220-240VAC    | 500mA             | 20-30V         | 82%        | 0.95         | 102*38.2*25mm |
|                                                                                     | LS-15-550 TRIAC LI1    | 15W   | 220-240VAC    | 550mA             | 17-27V         | 82%        | 0.95         | 102*38.2*25mm |
|                                                                                     | LS-15-600 TRIAC LI1    | 15W   | 220-240VAC    | 600mA             | 16-25V         | 82%        | 0.95         | 102*38.2*25mm |
|                                                                                     | LS-15-650 TRIAC LI1    | 15W   | 220-240VAC    | 650mA             | 16-23V         | 82%        | 0.95         | 102*38.2*25mm |
|                                                                                     | LS-15-700 TRIAC LI1    | 15W   | 220-240VAC    | 700mA             | 14-22V         | 82%        | 0.95         | 102*38.2*25mm |
|                                                                                     | LS-20-300 TRIAC LI1    | 20W   | 220-240VAC    | 300mA             | 50-68V         | 85%        | 0.95         | 102*38.2*25mm |
|                                                                                     | LS-20-350 TRIAC LI1    | 20W   | 220-240VAC    | 350mA             | 40-60V         | 85%        | 0.95         | 102*38.2*25mm |
|                                                                                     | LS-20-XXX TRIAC LI1    | 20W   | 220-240VAC    | 400/450/500mA     | 28-40V         | 85%        | 0.95         | 102*38.2*25mm |
|                                                                                     | LS-20-550 TRIAC LI1    | 20W   | 220-240VAC    | 550mA             | 28-38V         | 85%        | 0.95         | 102*38.2*25mm |
|                                                                                     | LS-20-600 TRIAC LI1    | 20W   | 220-240VAC    | 600mA             | 22-34V         | 85%        | 0.95         | 102*38.2*25mm |
| Page 44                                                                             | LS-20-XXX TRIAC LI1    | 20W   | 220-240VAC    | 650/700mA         | 20-30V         | 85%        | 0.95         | 102*38.2*25mm |

紧凑型 COMPACT

| Intelligent<br>- TRIAC                                                              | 型号                   | 功率    | 输入电压          | 输出电流           | 输出电压           | 效率         | 功率因数         | 尺寸           |
|-------------------------------------------------------------------------------------|----------------------|-------|---------------|----------------|----------------|------------|--------------|--------------|
|                                                                                     | Model                | Power | Input Voltage | Output Current | Output Voltage | Efficiency | Power Factor | Size (L*W*H) |
|  | LS-30-600 TRIAC LI1  | 30W   | 220-240VAC    | 600mA          | 35-50V         | 86%        | 0.95         | 135*41*25mm  |
|                                                                                     | LS-30-650 TRIAC LI1  | 30W   | 220-240VAC    | 650mA          | 30-45V         | 86%        | 0.95         | 135*41*25mm  |
|                                                                                     | LS-30-700 TRIAC LI1  | 30W   | 220-240VAC    | 700mA          | 28-42V         | 86%        | 0.95         | 135*41*25mm  |
|                                                                                     | LS-30-750 TRIAC LI1  | 30W   | 220-240VAC    | 750mA          | 28-40V         | 86%        | 0.95         | 135*41*25mm  |
|                                                                                     | LS-30-800 TRIAC LI1  | 30W   | 220-240VAC    | 800mA          | 28-40V         | 86%        | 0.95         | 135*41*25mm  |
|                                                                                     | LS-30-850 TRIAC LI1  | 30W   | 220-240VAC    | 850mA          | 24-37V         | 86%        | 0.95         | 135*41*25mm  |
|                                                                                     | LS-30-900 TRIAC LI1  | 30W   | 220-240VAC    | 900mA          | 22-34V         | 86%        | 0.95         | 135*41*25mm  |
|                                                                                     | LS-40-700 TRIAC LI1  | 40W   | 220-240VAC    | 700mA          | 36-54V         | 87%        | 0.95         | 135*41*25mm  |
|                                                                                     | LS-40-750 TRIAC LI1  | 40W   | 220-240VAC    | 750mA          | 35-53V         | 87%        | 0.95         | 135*41*25mm  |
|                                                                                     | LS-40-800 TRIAC LI1  | 40W   | 220-240VAC    | 800mA          | 33-50V         | 87%        | 0.95         | 135*41*25mm  |
|                                                                                     | LS-40-850 TRIAC LI1  | 40W   | 220-240VAC    | 850mA          | 31-47V         | 87%        | 0.95         | 135*41*25mm  |
|                                                                                     | LS-40-900 TRIAC LI1  | 40W   | 220-240VAC    | 900mA          | 27-42V         | 87%        | 0.95         | 135*41*25mm  |
|                                                                                     | LS-40-950 TRIAC LI1  | 40W   | 220-240VAC    | 950mA          | 28-40V         | 87%        | 0.95         | 135*41*25mm  |
|                                                                                     | LS-40-1000 TRIAC LI1 | 40W   | 220-240VAC    | 1000mA         | 28-40V         | 87%        | 0.95         | 135*41*25mm  |
| Page 45                                                                             | LS-40-1050 TRIAC LI1 | 40W   | 220-240VAC    | 1050mA         | 28-40V         | 87%        | 0.95         | 135*41*25mm  |

| Intelligent<br>- Wireless                                                             | 型号                   | 功率    | 输入电压          | 输出电流           | 输出电压           | 效率         | 功率因数         | 尺寸            |
|---------------------------------------------------------------------------------------|----------------------|-------|---------------|----------------|----------------|------------|--------------|---------------|
|                                                                                       | Model                | Power | Input Voltage | Output Current | Output Voltage | Efficiency | Power Factor | Size (L*W*H)  |
|  | LS-8-100 Blue SI-MJ  | 8W    | 220-240VAC    | 100mA          | 30-40V         | 75%        | 0.5          | 115*30*20.5mm |
|                                                                                       | LS-8-120 Blue SI-MJ  | 8W    | 220-240VAC    | 120mA          | 30-40V         | 75%        | 0.5          | 115*30*20.5mm |
|                                                                                       | LS-8-160 Blue SI-MJ  | 8W    | 220-240VAC    | 160mA          | 30-40V         | 80%        | 0.5          | 115*30*20.5mm |
|                                                                                       | LS-8-180 Blue SI-MJ  | 8W    | 220-240VAC    | 180mA          | 30-40V         | 80%        | 0.5          | 115*30*20.5mm |
|                                                                                       | LS-8-200 Blue SI-MJ  | 8W    | 220-240VAC    | 200mA          | 30-40V         | 80%        | 0.5          | 115*30*20.5mm |
|                                                                                       | LS-8-235 Blue SI-MJ  | 8W    | 220-240VAC    | 235mA          | 30-40 V        | 80%        | 0.5          | 115*30*20.5mm |
|                                                                                       | LS-12-250 Blue SI-MJ | 12W   | 220-240VAC    | 250mA          | 30-40V         | 84%        | 0.5          | 115*30*20.5mm |
|                                                                                       | LS-12-280 Blue SI-MJ | 12W   | 220-240VAC    | 280mA          | 30-40V         | 84%        | 0.5          | 115*30*20.5mm |
|                                                                                       | LS-12-300 Blue SI-MJ | 12W   | 220-240VAC    | 300mA          | 30-40V         | 84%        | 0.5          | 115*30*20.5mm |
|                                                                                       | LS-12-350 Blue SI-MJ | 12W   | 220-240VAC    | 350mA          | 30-40V         | 85%        | 0.5          | 115*30*20.5mm |
| Page 46                                                                               |                      |       |               |                |                |            |              |               |

| ON/OFF<br>- High Eff.                                                                 | 型号                  | 功率    | 输入电压          | 输出电流           | 输出电压           | 效率         | 功率因数         | 尺寸            |
|---------------------------------------------------------------------------------------|---------------------|-------|---------------|----------------|----------------|------------|--------------|---------------|
|                                                                                       | Model               | Power | Input Voltage | Output Current | Output Voltage | Efficiency | Power Factor | Size (L*W*H)  |
|  | FLS-15-350 LD1 ADV  | 15W   | 220-240VAC    | 200-350mA      | 28-40V         | 92%        | 0.95         | 116*41.2*26mm |
|                                                                                       | FLS-21-500 LD1 ADV  | 21W   | 220-240VAC    | 350-500mA      | 28-40V         | 93%        | 0.95         | 116*41.2*26mm |
|                                                                                       | FLS-30-750 LD1 ADV  | 30W   | 220-240VAC    | 600-750mA      | 28-40V         | 94%        | 0.95         | 116*41.2*26mm |
| Page 47                                                                               | FLS-40-1050 LD1 ADV | 40W   | 220-240VAC    | 700-1050mA     | 28-40V         | 94%        | 0.95         | 116*41.2*26mm |

| ON/OFF<br>- Silm                                                                      | 型号             | 功率    | 输入电压          | 输出电流           | 输出电压           | 效率         | 功率因数         | 尺寸            |
|---------------------------------------------------------------------------------------|----------------|-------|---------------|----------------|----------------|------------|--------------|---------------|
|                                                                                       | Model          | Power | Input Voltage | Output Current | Output Voltage | Efficiency | Power Factor | Size (L*W*H)  |
|  | FLS-8-500 LA   | 8W    | 220-240VAC    | 150-500mA      | 2.5-48V        | 82%        | 0.9          | 115*30*20.5mm |
| Page 48                                                                               | FLS-18-1050 LA | 18W   | 220-240VAC    | 550-1050mA     | 2.5-33V        | 85%        | 0.95         | 115*30*20.5mm |


紧凑型 COMPACT

| ON/OFF<br>- CCT                                                                     | 型号<br>Model           | 功率<br>Power | 输入电压<br>Input Voltage | 输出电流<br>Output Current | 输出电压<br>Output Voltage | 效率<br>Efficiency | 功率因数<br>Power Factor | 尺寸<br>Size (L*W*H) |
|-------------------------------------------------------------------------------------|-----------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
|    | LS-8-70 CCT SI E      | 8W          | 220-240VAC            | 70mA                   | 30-40V                 | 78%              | 0.6                  | 92*28*21mm         |
|                                                                                     | LS-8-80 CCT SI E      | 8W          | 220-240VAC            | 80mA                   | 30-40V                 | 78%              | 0.6                  | 92*28*21mm         |
|                                                                                     | LS-8-120 CCT SI E     | 8W          | 220-240VAC            | 120mA                  | 30-40V                 | 80%              | 0.6                  | 92*28*21mm         |
|                                                                                     | LS-8-150 CCT SI E     | 8W          | 220-240VAC            | 150mA                  | 30-40V                 | 80%              | 0.6                  | 92*28*21mm         |
|                                                                                     | LS-8-160 CCT SI E     | 8W          | 220-240VAC            | 160mA                  | 30-40V                 | 80%              | 0.6                  | 92*28*21mm         |
|                                                                                     | LS-8-180 CCT SI E     | 8W          | 220-240VAC            | 180mA                  | 30-40V                 | 80%              | 0.6                  | 92*28*21mm         |
|                                                                                     | LS-8-200 CCT SI E     | 8W          | 220-240VAC            | 200mA                  | 30-40V                 | 80%              | 0.6                  | 92*28*21mm         |
|                                                                                     | LS-8-220 CCT SI E     | 8W          | 220-240VAC            | 220mA                  | 30-40V                 | 80%              | 0.6                  | 92*28*21mm         |
|                                                                                     | LS-12-250 CCT SI E    | 12W         | 220-240VAC            | 250mA                  | 30-40V                 | 82%              | 0.6                  | 92*28*21mm         |
|                                                                                     | LS-12-280 CCT SI E    | 12W         | 220-240VAC            | 280mA                  | 30-40V                 | 82%              | 0.6                  | 92*28*21mm         |
|                                                                                     | LS-12-300 CCT SI E    | 12W         | 220-240VAC            | 300mA                  | 30-40V                 | 82%              | 0.6                  | 92*28*21mm         |
|                                                                                     | LS-21-400 CCT SI E    | 21W         | 220-240VAC            | 400mA                  | 30-42V                 | 85%              | 0.6                  | 92*36*25mm         |
|                                                                                     | LS-21-450 CCT SI E    | 21W         | 220-240VAC            | 450mA                  | 30-42V                 | 85%              | 0.6                  | 92*36*25mm         |
|                                                                                     | LS-21-500 CCT SI E    | 21W         | 220-240VAC            | 500mA                  | 30-42V                 | 85%              | 0.6                  | 92*36*25mm         |
|                                                                                     | LS-21-600 CCT SI E    | 21W         | 220-240VAC            | 600mA                  | 27-39V                 | 85%              | 0.6                  | 92*36*25mm         |
| Page 49                                                                             |                       |             |                       |                        |                        |                  |                      |                    |
|  | LS-30-500 CCT LI EXC  | 30W         | 220-240VAC            | 500mA                  | 24-42V                 | 87%              | 0.95                 | 102*38.2*25mm      |
|                                                                                     | LS-30-550 CCT LI EXC  | 30W         | 220-240VAC            | 550mA                  | 24-42V                 | 87%              | 0.95                 | 102*38.2*25mm      |
|                                                                                     | LS-30-600 CCT LI EXC  | 30W         | 220-240VAC            | 600mA                  | 24-42V                 | 87%              | 0.95                 | 102*38.2*25mm      |
|                                                                                     | LS-30-650 CCT LI EXC  | 30W         | 220-240VAC            | 650mA                  | 24-42V                 | 87%              | 0.95                 | 102*38.2*25mm      |
|                                                                                     | LS-30-700 CCT LI EXC  | 30W         | 220-240VAC            | 700mA                  | 24-42V                 | 87%              | 0.95                 | 102*38.2*25mm      |
|                                                                                     | LS-30-750 CCT LI EXC  | 30W         | 220-240VAC            | 750mA                  | 24-42V                 | 87%              | 0.95                 | 102*38.2*25mm      |
|                                                                                     | LS-30-800 CCT LI EXC  | 30W         | 220-240VAC            | 800mA                  | 24-42V                 | 87%              | 0.95                 | 102*38.2*25mm      |
|                                                                                     | LS-40-850 CCT LI EXC  | 40W         | 220-240VAC            | 850mA                  | 24-42V                 | 89%              | 0.95                 | 116*41.2*26mm      |
|                                                                                     | LS-40-900 CCT LI EXC  | 40W         | 220-240VAC            | 900mA                  | 24-42V                 | 89%              | 0.95                 | 116*41.2*26mm      |
|                                                                                     | LS-40-950 CCT LI EXC  | 40W         | 220-240VAC            | 950mA                  | 24-42V                 | 89%              | 0.95                 | 116*41.2*26mm      |
|                                                                                     | LS-40-1000 CCT LI EXC | 40W         | 220-240VAC            | 1000mA                 | 24-40V                 | 89%              | 0.95                 | 116*41.2*26mm      |
|                                                                                     | LS-40-1050 CCT LI EXC | 40W         | 220-240VAC            | 1050mA                 | 24-38.5V               | 89%              | 0.95                 | 116*41.2*26mm      |
| Page 50                                                                             |                       |             |                       |                        |                        |                  |                      |                    |

| ON/OFF<br>- Hot sale                                                                | 型号<br>Model    | 功率<br>Power | 输入电压<br>Input Voltage | 输出电流<br>Output Current | 输出电压<br>Output Voltage | 效率<br>Efficiency | 功率因数<br>Power Factor | 尺寸<br>Size (L*W*H) |
|-------------------------------------------------------------------------------------|----------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
|  | LS-3-XXX SI E  | 3W          | 220-240VAC            | 150-500mA              | 5-12V                  | 68%              | 0.45                 | 84*20.5*16.5mm     |
|                                                                                     | LS-3-700 SI E  | 3W          | 220-240VAC            | 700mA                  | 2.5-4.5V               | 71%              | 0.45                 | 84*20.5*16.5mm     |
|                                                                                     | LS-6-XXX SI E  | 6W          | 220-240VAC            | 120-180mA              | 27-40V                 | 76%              | 0.50                 | 84*20.5*16.5mm     |
|                                                                                     | LS-6-200 SI E  | 6W          | 220-240VAC            | 200mA                  | 27-40V                 | 76%              | 0.50                 | 84*20.5*16.5mm     |
|                                                                                     | LS-6-220 SI E  | 6W          | 220-240VAC            | 220mA                  | 27-40V                 | 76%              | 0.50                 | 84*20.5*16.5mm     |
|                                                                                     | LS-6-250 SI E  | 6W          | 220-240VAC            | 250mA                  | 10-24V                 | 76%              | 0.50                 | 84*20.5*16.5mm     |
|                                                                                     | LS-6-XXX SI E  | 6W          | 220-240VAC            | 300-700mA              | 8-20V                  | 76%              | 0.50                 | 84*20.5*16.5mm     |
|                                                                                     | LS-8-180 SI E1 | 8W          | 220-240VAC            | 180mA                  | 30-42V                 | 73%              | 0.50                 | 84*20.5*16.5mm     |
|                                                                                     | LS-8-200 SI E1 | 8W          | 220-240VAC            | 200mA                  | 30-42V                 | 73%              | 0.50                 | 84*20.5*16.5mm     |
|                                                                                     | LS-8-220 SI E1 | 8W          | 220-240VAC            | 220mA                  | 30-42V                 | 73%              | 0.50                 | 84*20.5*16.5mm     |
|                                                                                     | LS-8-500 SI E1 | 8W          | 220-240VAC            | 500mA                  | 13-18V                 | 73%              | 0.50                 | 84*20.5*16.5mm     |
|                                                                                     | LS-8-700 SI E1 | 8W          | 220-240VAC            | 700mA                  | 8-13V                  | 73%              | 0.50                 | 84*20.5*16.5mm     |
| Page 51                                                                             |                |             |                       |                        |                        |                  |                      |                    |

紧凑型 COMPACT

| ON/OFF<br>- Hot sale                                                                | 型号<br>Model     | 功率<br>Power | 输入电压<br>Input Voltage | 输出电流<br>Output Current | 输出电压<br>Output Voltage | 效率<br>Efficiency | 功率因数<br>Power Factor | 尺寸<br>Size (L*W*H) |
|-------------------------------------------------------------------------------------|-----------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
|  | LS-8-70 SI2 E   | 8W          | 220-240VAC            | 70mA                   | 30-40V                 | 78%              | 0.60                 | 92*28*21mm         |
|                                                                                     | LS-8-80 SI2 E   | 8W          | 220-240VAC            | 80-120mA               | 30-40V                 | 78%              | 0.60                 | 92*28*21mm         |
|                                                                                     | LS-8-150 SI2 E  | 8W          | 220-240VAC            | 150mA                  | 30-40V                 | 80%              | 0.60                 | 92*28*21mm         |
|                                                                                     | LS-8-XXX SI2 E  | 8W          | 220-240VAC            | 160-220mA              | 30-40V                 | 80%              | 0.60                 | 92*28*21mm         |
|                                                                                     | LS-8-300 SI2 E  | 8W          | 220-240VAC            | 300mA                  | 18-24V                 | 80%              | 0.60                 | 92*28*21mm         |
|                                                                                     | LS-8-350 SI2 E  | 8W          | 220-240VAC            | 350mA                  | 18-24V                 | 80%              | 0.60                 | 92*28*21mm         |
|                                                                                     | LS-8-500 SI2 E  | 8W          | 220-240VAC            | 500mA                  | 10-16V                 | 80%              | 0.60                 | 92*28*21mm         |
|                                                                                     | LS-8-700 SI2 E  | 8W          | 220-240VAC            | 700mA                  | 8-11.4V                | 80%              | 0.60                 | 92*28*21mm         |
| Page 52                                                                             |                 |             |                       |                        |                        |                  |                      |                    |
|  | LS-12-250 SI2 E | 12W         | 220-240VAC            | 250mA                  | 30-40V                 | 82%              | 0.60                 | 92*28*21mm         |
|                                                                                     | LS-12-280 SI2 E | 12W         | 220-240VAC            | 280mA                  | 30-40V                 | 82%              | 0.60                 | 92*28*21mm         |
|                                                                                     | LS-12-300 SI2 E | 12W         | 220-240VAC            | 300mA                  | 30-40V                 | 82%              | 0.60                 | 92*28*21mm         |
|                                                                                     | LS-12-350 SI2 E | 12W         | 220-240VAC            | 350mA                  | 30-40V                 | 82%              | 0.60                 | 92*28*21mm         |
|                                                                                     | LS-12-500 SI2 E | 12W         | 220-240VAC            | 500-700mA              | 18-24V                 | 82%              | 0.60                 | 92*28*21mm         |
|                                                                                     | LS-21-300 SI1 E | 21W         | 220-240VAC            | 300mA                  | 40-70V                 | 85%              | 0.6                  | 92*36*25mm         |
|                                                                                     | LS-21-350 SI1 E | 21W         | 220-240VAC            | 350mA                  | 42-60V                 | 85%              | 0.6                  | 92*36*25mm         |
|                                                                                     | LS-21-400 SI1 E | 21W         | 220-240VAC            | 400mA                  | 30-42V                 | 85%              | 0.6                  | 92*36*25mm         |
|                                                                                     | LS-21-450 SI1 E | 21W         | 220-240VAC            | 450mA                  | 30-42V                 | 85%              | 0.6                  | 92*36*25mm         |
|                                                                                     | LS-21-500 SI1 E | 21W         | 220-240VAC            | 500mA                  | 30-42V                 | 85%              | 0.6                  | 92*36*25mm         |
|                                                                                     | LS-21-550 SI1 E | 21W         | 220-240VAC            | 550mA                  | 30-40V                 | 85%              | 0.6                  | 92*36*25mm         |
|                                                                                     | LS-21-600 SI1 E | 21W         | 220-240VAC            | 600mA                  | 27-39V                 | 85%              | 0.6                  | 92*36*25mm         |
|                                                                                     | LS-21-650 SI1 E | 21W         | 220-240VAC            | 650mA                  | 20-32V                 | 85%              | 0.6                  | 92*36*25mm         |
|                                                                                     | LS-21-700 SI1 E | 21W         | 220-240VAC            | 700mA                  | 18-30V                 | 85%              | 0.6                  | 92*36*25mm         |
| Page 53                                                                             |                 |             |                       |                        |                        |                  |                      |                    |

| ON/OFF<br>- High PF                                                                   | 型号<br>Model       | 功率<br>Power | 输入电压<br>Input Voltage | 输出电流<br>Output Current | 输出电压<br>Output Voltage | 效率<br>Efficiency | 功率因数<br>Power Factor | 尺寸<br>Size (L*W*H) |
|---------------------------------------------------------------------------------------|-------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
|  | LS-8-70 LI2 EXC   | 8W          | 220-240VAC            | 70mA                   | 27-42V                 | 68%              | 0.9                  | 92*36*25mm         |
|                                                                                       | LS-8-120 LI2 EXC  | 8W          | 220-240VAC            | 120mA                  | 27-42V                 | 75%              | 0.92                 | 92*36*25mm         |
|                                                                                       | LS-8-150 LI2 EXC  | 8W          | 220-240VAC            | 150mA                  | 27-42V                 | 75%              | 0.95                 | 92*36*25mm         |
|                                                                                       | LS-8-160 LI2 EXC  | 8W          | 220-240VAC            | 160mA                  | 27-42V                 | 75%              | 0.95                 | 92*36*25mm         |
|                                                                                       | LS-8-180 LI2 EXC  | 8W          | 220-240VAC            | 180mA                  | 27-42V                 | 78%              | 0.95                 | 92*36*25mm         |
|                                                                                       | LS-8-200 LI2 EXC  | 8W          | 220-240VAC            | 200mA                  | 27-40V                 | 78%              | 0.95                 | 92*36*25mm         |
|                                                                                       | LS-8-220 LI2 EXC  | 8W          | 220-240VAC            | 220mA                  | 27-40V                 | 79%              | 0.95                 | 92*36*25mm         |
|                                                                                       | LS-12-250 LI2 EXC | 12W         | 220-240VAC            | 250mA                  | 27-42V                 | 82%              | 0.95                 | 92*36*25mm         |
|                                                                                       | LS-12-280 LI2 EXC | 12W         | 220-240VAC            | 280mA                  | 27-42V                 | 82%              | 0.95                 | 92*36*25mm         |
|                                                                                       | LS-12-300 LI2 EXC | 12W         | 220-240VAC            | 300mA                  | 27-42V                 | 82%              | 0.95                 | 92*36*25mm         |
|                                                                                       | LS-21-400 LI2 EXC | 21W         | 220-240VAC            | 400mA                  | 27-42V                 | 85%              | 0.95                 | 102*38.2*25mm      |
|                                                                                       | LS-21-450 LI2 EXC | 21W         | 220-240VAC            | 450mA                  | 27-42V                 | 85%              | 0.95                 | 102*38.2*25mm      |
|                                                                                       | LS-21-500 LI2 EXC | 21W         | 220-240VAC            | 500mA                  | 27-42V                 | 86%              | 0.95                 | 102*38.2*25mm      |
| Page 54                                                                               |                   |             |                       |                        |                        |                  |                      |                    |
|  | LS-15-350 LI1 EXC | 15W         | 220-240VAC            | 350mA                  | 27-42V                 | 84%              | 0.95                 | 102*38.2*25mm      |
|                                                                                       | LS-21-400 LI1 EXC | 21W         | 220-240VAC            | 400mA                  | 27-42V                 | 85%              | 0.95                 | 102*38.2*25mm      |
|                                                                                       | LS-21-450 LI1 EXC | 21W         | 220-240VAC            | 450mA                  | 27-42V                 | 85%              | 0.95                 | 102*38.2*25mm      |
|                                                                                       | LS-21-500 LI1 EXC | 21W         | 220-240VAC            | 500mA                  | 27-42V                 | 86%              | 0.95                 | 102*38.2*25mm      |
| Page 55                                                                               |                   |             |                       |                        |                        |                  |                      |                    |

紧凑型 COMPACT

ON/OFF  
- High PF

| 型号<br>Model          | 功率<br>Power | 输入电压<br>Input Voltage | 输出电流<br>Output Current | 输出电压<br>Output Voltage | 效率<br>Efficiency | 功率因数<br>Power Factor | 尺寸<br>Size (L*W*H) |
|----------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| LS-40-600 LI1 EXC S  | 40W         | 220-240VAC            | 600mA                  | 24-42V                 | 89%              | 0.95                 | 102*38.2*25mm      |
| LS-40-650 LI1 EXC S  | 40W         | 220-240VAC            | 650mA                  | 24-42V                 | 89%              | 0.95                 | 102*38.2*25mm      |
| LS-40-700 LI1 EXC S  | 40W         | 220-240VAC            | 700mA                  | 24-42V                 | 89%              | 0.95                 | 102*38.2*25mm      |
| LS-40-750 LI1 EXC S  | 40W         | 220-240VAC            | 750mA                  | 24-42V                 | 89%              | 0.95                 | 102*38.2*25mm      |
| LS-40-800 LI1 EXC S  | 40W         | 220-240VAC            | 800mA                  | 24-42V                 | 89%              | 0.95                 | 102*38.2*25mm      |
| LS-40-850 LI1 EXC S  | 40W         | 220-240VAC            | 850mA                  | 24-42V                 | 89%              | 0.95                 | 102*38.2*25mm      |
| LS-40-900 LI1 EXC S  | 40W         | 220-240VAC            | 900mA                  | 24-42V                 | 90%              | 0.95                 | 102*38.2*25mm      |
| LS-40-950 LI1 EXC S  | 40W         | 220-240VAC            | 950mA                  | 24-42V                 | 90%              | 0.95                 | 102*38.2*25mm      |
| LS-40-1000 LI1 EXC S | 40W         | 220-240VAC            | 1000mA                 | 24-40V                 | 90%              | 0.95                 | 102*38.2*25mm      |
| LS-40-1050 LI1 EXC S | 40W         | 220-240VAC            | 1050mA                 | 24-38V                 | 90%              | 0.95                 | 102*38.2*25mm      |
| LS-50-500 LI EXC     | 50W         | 220-240VAC            | 500mA                  | 30-84V                 | 91%              | 0.95                 | 116*41.2*26mm      |
| LS-50-600 LI EXC     | 50W         | 220-240VAC            | 600mA                  | 30-84V                 | 91%              | 0.95                 | 116*41.2*26mm      |
| LS-50-1100 LI EXC    | 50W         | 220-240VAC            | 1100mA                 | 15-42V                 | 91%              | 0.95                 | 116*41.2*26mm      |
| LS-50-1150 LI EXC    | 50W         | 220-240VAC            | 1150mA                 | 15-42V                 | 91%              | 0.95                 | 116*41.2*26mm      |
| LS-50-1200 LI EXC    | 50W         | 220-240VAC            | 1200mA                 | 15-42V                 | 91%              | 0.95                 | 116*41.2*26mm      |
| LS-50-1250 LI EXC    | 50W         | 220-240VAC            | 1250mA                 | 15-40V                 | 91%              | 0.95                 | 116*41.2*26mm      |
| LS-60-1050 LI EXC    | 60W         | 220-240VAC            | 1050mA                 | 15-42V                 | 90%              | 0.95                 | 135*41.2*25mm      |
| LS-60-1300 LI EXC    | 60W         | 220-240VAC            | 1300mA                 | 15-42V                 | 90%              | 0.95                 | 135*41.2*25mm      |
| LS-60-1350 LI EXC    | 60W         | 220-240VAC            | 1350mA                 | 15-42V                 | 90%              | 0.95                 | 135*41.2*25mm      |
| LS-60-1400 LI EXC    | 60W         | 220-240VAC            | 1400mA                 | 15-42V                 | 90%              | 0.95                 | 135*41.2*25mm      |
| LS-60-1450 LI EXC    | 60W         | 220-240VAC            | 1450mA                 | 15-40V                 | 90%              | 0.95                 | 135*41.2*25mm      |
| LS-60-1500 LI EXC    | 60W         | 220-240VAC            | 1500mA                 | 15-40V                 | 90%              | 0.95                 | 135*41.2*25mm      |

ON/OFF  
- Wide Voltage

| 型号<br>Model      | 功率<br>Power | 输入电压<br>Input Voltage | 输出电流<br>Output Current | 输出电压<br>Output Voltage | 效率<br>Efficiency | 功率因数<br>Power Factor | 尺寸<br>Size (L*W*H) |
|------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| LX-8-70 LI EXC   | 8W          | 100-277VAC            | 70mA                   | 27-42V                 | 67%              | 0.9                  | 92*36*25mm         |
| LX-8-100 LI EXC  | 8W          | 100-277VAC            | 100mA                  | 27-42V                 | 67%              | 0.9                  | 92*36*25mm         |
| LX-8-120 LI EXC  | 8W          | 100-277VAC            | 120mA                  | 27-42V                 | 75%              | 0.92                 | 92*36*25mm         |
| LX-8-150 LI EXC  | 8W          | 100-277VAC            | 150mA                  | 27-42V                 | 77%              | 0.95                 | 92*36*25mm         |
| LX-8-160 LI EXC  | 8W          | 100-277VAC            | 160mA                  | 27-42V                 | 77%              | 0.95                 | 92*36*25mm         |
| LX-8-180 LI EXC  | 8W          | 100-277VAC            | 180mA                  | 27-42V                 | 78%              | 0.95                 | 92*36*25mm         |
| LX-8-200 LI EXC  | 8W          | 100-277VAC            | 200mA                  | 27-40V                 | 79%              | 0.95                 | 92*36*25mm         |
| LX-8-220 LI EXC  | 8W          | 100-277VAC            | 220mA                  | 27-40V                 | 79%              | 0.95                 | 92*36*25mm         |
| LX-12-250 LI EXC | 12W         | 100-277VAC            | 250mA                  | 27-42V                 | 78%              | 0.9                  | 92*36*25mm         |
| LX-12-280 LI EXC | 12W         | 100-277VAC            | 280mA                  | 27-42V                 | 78%              | 0.9                  | 92*36*25mm         |
| LX-12-300 LI EXC | 12W         | 100-277VAC            | 300mA                  | 27-40V                 | 78%              | 0.9                  | 92*36*25mm         |
| LX-21-350 LI EXC | 21W         | 100-277VAC            | 350mA                  | 27-44V                 | 85%              | 0.95                 | 102*38.2*25mm      |
| LX-21-400 LI EXC | 21W         | 100-277VAC            | 400mA                  | 27-44V                 | 85%              | 0.95                 | 102*38.2*25mm      |
| LX-21-450 LI EXC | 21W         | 100-277VAC            | 450mA                  | 27-44V                 | 85%              | 0.95                 | 102*38.2*25mm      |
| LX-21-500 LI EXC | 21W         | 100-277VAC            | 500mA                  | 27-44V                 | 85%              | 0.95                 | 102*38.2*25mm      |
| LX-21-550 LI EXC | 21W         | 100-277VAC            | 550mA                  | 27-38.5V               | 85%              | 0.95                 | 102*38.2*25mm      |
| LX-40-600 LI EXC | 40W         | 100-277VAC            | 600mA                  | 24-42V                 | 84%              | 0.9                  | 135*41.2*25mm      |
| LX-40-650 LI EXC | 40W         | 100-277VAC            | 650mA                  | 24-42V                 | 84%              | 0.9                  | 135*41.2*25mm      |

紧凑型 COMPACT

ON/OFF  
- Wide Voltage

| 型号<br>Model       | 功率<br>Power | 输入电压<br>Input Voltage | 输出电流<br>Output Current | 输出电压<br>Output Voltage | 效率<br>Efficiency | 功率因数<br>Power Factor | 尺寸<br>Size (L*W*H) |
|-------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| LX-40-700 LI EXC  | 40W         | 100-277VAC            | 700mA                  | 24-42V                 | 84%              | 0.9                  | 135*41.2*25mm      |
| LX-40-750 LI EXC  | 40W         | 100-277VAC            | 750mA                  | 24-42V                 | 84%              | 0.9                  | 135*41.2*25mm      |
| LX-40-800 LI EXC  | 40W         | 100-277VAC            | 800mA                  | 24-42V                 | 84%              | 0.9                  | 135*41.2*25mm      |
| LX-40-850 LI EXC  | 40W         | 100-277VAC            | 850mA                  | 24-42V                 | 84%              | 0.9                  | 135*41.2*25mm      |
| LX-40-900 LI EXC  | 40W         | 100-277VAC            | 900mA                  | 24-42V                 | 84%              | 0.9                  | 135*41.2*25mm      |
| LX-40-950 LI EXC  | 40W         | 100-277VAC            | 950mA                  | 24-42V                 | 84%              | 0.9                  | 135*41.2*25mm      |
| LX-40-1000 LI EXC | 40W         | 100-277VAC            | 1000mA                 | 24-40V                 | 84%              | 0.9                  | 135*41.2*25mm      |
| LX-40-1050 LI EXC | 40W         | 100-277VAC            | 1050mA                 | 24-38.5V               | 84%              | 0.9                  | 135*41.2*25mm      |

ON/OFF  
- Round

| 型号<br>Model   | 功率<br>Power | 输入电压<br>Input Voltage | 输出电流<br>Output Current | 输出电压<br>Output Voltage | 效率<br>Efficiency | 功率因数<br>Power Factor | 尺寸<br>Size (L*W*H) |
|---------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| CS-8-100 SB   | 8W          | 220-240VAC            | 100mA                  | 30-40V                 | 80%              | 0.5                  | Φ42.5*21mm         |
| CS-8-120 SB   | 8W          | 220-240VAC            | 120mA                  | 30-40V                 | 80%              | 0.5                  | Φ42.5*21mm         |
| CS-8-150 SB   | 8W          | 220-240VAC            | 150mA                  | 30-40V                 | 80%              | 0.5                  | Φ42.5*21mm         |
| CS-8-180 SB   | 8W          | 220-240VAC            | 180mA                  | 30-40V                 | 80%              | 0.6                  | Φ42.5*21mm         |
| CS-8-200 SB   | 8W          | 220-240VAC            | 200mA                  | 30-40V                 | 80%              | 0.6                  | Φ42.5*21mm         |
| CS-8-220 SB   | 8W          | 220-240VAC            | 220mA                  | 30-40V                 | 80%              | 0.6                  | Φ42.5*21mm         |
| CS-15-250 SB  | 15W         | 220-240VAC            | 250mA                  | 27-42V                 | 82%              | 0.6                  | Φ42.5*21mm         |
| CS-15-280 SB  | 15W         | 220-240VAC            | 280mA                  | 27-42V                 | 82%              | 0.6                  | Φ42.5*21mm         |
| CS-15-300 SB  | 15W         | 220-240VAC            | 300mA                  | 27-42V                 | 82%              | 0.6                  | Φ42.5*21mm         |
| CS-15-350 SB  | 15W         | 220-240VAC            | 350mA                  | 27-42V                 | 82%              | 0.6                  | Φ42.5*21mm         |
| CS-15-400 SB  | 15W         | 220-240VAC            | 400mA                  | 27-42V                 | 82%              | 0.6                  | Φ42.5*21mm         |
| CS-25-450 LB  | 25W         | 220-240VAC            | 450mA                  | 24-42V                 | 87%              | 0.95                 | Φ56*25.5mm         |
| CS-25-500 LB  | 25W         | 220-240VAC            | 500mA                  | 24-42V                 | 87%              | 0.95                 | Φ56*25.5mm         |
| CS-25-550 LB  | 25W         | 220-240VAC            | 550mA                  | 24-42V                 | 88%              | 0.95                 | Φ56*25.5mm         |
| CS-25-600 LB  | 25W         | 220-240VAC            | 600mA                  | 24-42V                 | 88%              | 0.95                 | Φ56*25.5mm         |
| CS-32-650 LB  | 32W         | 220-240VAC            | 650mA                  | 24-42V                 | 89%              | 0.95                 | Φ65*25mm           |
| CS-32-700 LB  | 32W         | 220-240VAC            | 700mA                  | 24-42V                 | 89%              | 0.95                 | Φ65*25mm           |
| CS-32-750 LB  | 32W         | 220-240VAC            | 750mA                  | 24-42V                 | 89%              | 0.95                 | Φ65*25mm           |
| CS-32-800 LB  | 32W         | 220-240VAC            | 800mA                  | 24-42V                 | 89%              | 0.95                 | Φ65*25mm           |
| CS-8-120 SI   | 8W          | 220-240VAC            | 120mA                  | 30-40V                 | 80%              | 0.5                  | Φ42.5*21mm         |
| CS-8-150 SI   | 8W          | 220-240VAC            | 150mA                  | 30-40V                 | 80%              | 0.5                  | Φ42.5*21mm         |
| CS-8-180 SI   | 8W          | 220-240VAC            | 180mA                  | 30-40V                 | 80%              | 0.5                  | Φ42.5*21mm         |
| CS-8-200 SI   | 8W          | 220-240VAC            | 200mA                  | 30-40V                 | 80%              | 0.5                  | Φ42.5*21mm         |
| CS-15-250 SI  | 15W         | 220-240VAC            | 250mA                  | 27-42V                 | 82%              | 0.5                  | Φ42.5*21mm         |
| CS-15-300 SI  | 15W         | 220-240VAC            | 300mA                  | 27-42V                 | 82%              | 0.5                  | Φ42.5*21mm         |
| CS-15-350 SI  | 15W         | 220-240VAC            | 350mA                  | 27-42V                 | 82%              | 0.5                  | Φ42.5*21mm         |
| CS-22-350 SI  | 22W         | 220-240VAC            | 350mA                  | 27-42V                 | 85%              | 0.5                  | Φ50*22mm           |
| CS-22-400 SI  | 22W         | 220-240VAC            | 400mA                  | 27-42V                 | 85%              | 0.5                  | Φ50*22mm           |
| CS-22-450 SI  | 22W         | 220-240VAC            | 450mA                  | 27-42V                 | 85%              | 0.5                  | Φ50*22mm           |
| CS-22-500 SI  | 22W         | 220-240VAC            | 500mA                  | 27-42V                 | 85%              | 0.5                  | Φ50*22mm           |
| CS-22-550 SI  | 22W         | 220-240VAC            | 550mA                  | 27-42V                 | 85%              | 0.5                  | Φ50*22mm           |
| CS-24-450 LI1 | 24W         | 220-240VAC            | 450mA                  | 24-42V                 | 87%              | 0.95                 | Φ56*25.5mm         |
| CS-24-500 LI1 | 24W         | 220-240VAC            | 500mA                  | 24-42V                 | 87%              | 0.95                 | Φ56*25.5mm         |
| CS-24-550 LI1 | 24W         | 220-240VAC            | 550mA                  | 24-42V                 | 88%              | 0.95                 | Φ56*25.5mm         |
| CS-24-600 LI1 | 24W         | 220-240VAC            | 600mA                  | 24-40V                 | 88%              | 0.95                 | Φ56*25.5mm         |

紧凑型 COMPACT

ON/OFF  
- Round

ON/OFF

- Round



| 型号<br>Model    | 功率<br>Power | 输入电压<br>Input Voltage | 输出电流<br>Output Current | 输出电压<br>Output Voltage | 效率<br>Efficiency | 功率因数<br>Power Factor | 尺寸<br>Size (L*W*H) |
|----------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| CS-30-600 LI1  | 30W         | 220-240VAC            | 600mA                  | 20-42V                 | 89%              | 0.95                 | Φ65*25mm           |
| CS-30-650 LI1  | 30W         | 220-240VAC            | 650mA                  | 20-42V                 | 89%              | 0.95                 | Φ65*25mm           |
| CS-30-700 LI1  | 30W         | 220-240VAC            | 700mA                  | 20-42V                 | 89%              | 0.95                 | Φ65*25mm           |
| CS-30-750 LI1  | 30W         | 220-240VAC            | 750mA                  | 24-40V                 | 89%              | 0.95                 | Φ65*25mm           |
| CS-42-800 LI1  | 42W         | 220-240VAC            | 800mA                  | 24-42V                 | 90%              | 0.95                 | Φ65*25mm           |
| CS-42-850 LI1  | 42W         | 220-240VAC            | 850mA                  | 24-42V                 | 90%              | 0.95                 | Φ65*25mm           |
| CS-42-900 LI1  | 42W         | 220-240VAC            | 900mA                  | 24-42V                 | 90%              | 0.95                 | Φ65*25mm           |
| CS-42-950 LI1  | 42W         | 220-240VAC            | 950mA                  | 24-42V                 | 90%              | 0.95                 | Φ65*25mm           |
| CS-42-1000 LI1 | 42W         | 220-240VAC            | 1000mA                 | 24-42V                 | 90%              | 0.95                 | Φ65*25mm           |
| CS-42-1050 LI1 | 42W         | 220-240VAC            | 1050mA                 | 24-40V                 | 90%              | 0.95                 | Φ65*25mm           |

Page 62

Page 62

ON/OFF  
- Lead wire

ON/OFF  
- Lead wire

| 型号<br>Model                                                                         | 功率<br>Power                                                                         | 输入电压<br>Input Voltage | 输出电流<br>Output Current | 输出电压<br>Output Voltage | 效率<br>Efficiency | 功率因数<br>Power Factor | 尺寸<br>Size (L*W*H) |                |              |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|----------------|--------------|
|    | CH-12-300 IP65 LB1                                                                  | 12W                   | 100-240VAC             | 300mA                  | 24-40V           | 81%                  | 0.95               | Φ56*26mm       |              |
|                                                                                     | CH-12-350 IP65 LB1                                                                  | 12W                   | 100-240VAC             | 350mA                  | 20-35V           | 81%                  | 0.95               | Φ56*26mm       |              |
|                                                                                     | CH-12-500 IP65 LB1                                                                  | 12W                   | 100-240VAC             | 500mA                  | 14-24V           | 81%                  | 0.95               | Φ56*26mm       |              |
|                                                                                     | CH-12-700 IP65 LB1                                                                  | 12W                   | 100-240VAC             | 700mA                  | 10.5-17.5V       | 81%                  | 0.95               | Φ56*26mm       |              |
|                                                                                     | CH-18-300 IP65 LB                                                                   | 18W                   | 100-240VAC             | 300mA                  | 36-60V           | 86%                  | 0.95               | Φ56*26mm       |              |
|                                                                                     | CH-18-350 IP65 LB                                                                   | 18W                   | 100-240VAC             | 350mA                  | 31-52V           | 86%                  | 0.95               | Φ56*26mm       |              |
|                                                                                     | CH-18-450 IP65 LB                                                                   | 18W                   | 100-240VAC             | 450mA                  | 24-40V           | 86%                  | 0.95               | Φ56*26mm       |              |
|                                                                                     | CH-18-700 IP65 LB                                                                   | 18W                   | 100-240VAC             | 700mA                  | 15.5-26V         | 87%                  | 0.95               | Φ56*26mm       |              |
|                                                                                     | CH-25-350 IP65 LB1                                                                  | 25W                   | 100-240VAC             | 350mA                  | 43-72V           | 86%                  | 0.95               | Φ65*28mm       |              |
|                                                                                     | CH-25-600 IP65 LB1                                                                  | 25W                   | 100-240VAC             | 600mA                  | 25-42V           | 86%                  | 0.95               | Φ65*28mm       |              |
| Page 63                                                                             | CH-25-700 IP65 LB1                                                                  | 25W                   | 100-240VAC             | 700mA                  | 21.5-36V         | 86%                  | 0.95               | Φ65*28mm       |              |
|  | SS-6-300 MB                                                                         | 6W                    | 220-240VAC             | 300mA                  | 10-20V           | 76%                  | 0.7                | 58.1*28.5*21mm |              |
|                                                                                     | SS-6-350 MB                                                                         | 6W                    | 220-240VAC             | 350mA                  | 8-20V            | 76%                  | 0.7                | 58.1*28.5*21mm |              |
|                                                                                     | SS-6-700 MB                                                                         | 6W                    | 220-240VAC             | 700mA                  | 2.8-9V           | 76%                  | 0.7                | 58.1*28.5*21mm |              |
|                                                                                     | SS-9-200 MB-G                                                                       | 9W                    | 220-240VAC             | 200mA                  | 27-45V           | 78%                  | 0.8                | 60*34*23.5mm   |              |
|                                                                                     | SS-9-350 MB-G                                                                       | 9W                    | 220-240VAC             | 350mA                  | 15-26V           | 78%                  | 0.8                | 60*34*23.5mm   |              |
|                                                                                     | SS-9-700 MB-G                                                                       | 9W                    | 220-240VAC             | 700mA                  | 7-13V            | 78%                  | 0.8                | 60*34*23.5mm   |              |
|                                                                                     | SS-12-300 MB-G                                                                      | 12W                   | 220-240VAC             | 300mA                  | 24-40V           | 81%                  | 0.8                | 60*34*23.5mm   |              |
|                                                                                     | SS-12-350 MB-G                                                                      | 12W                   | 220-240VAC             | 350mA                  | 20-34.5V         | 81%                  | 0.8                | 60*34*23.5mm   |              |
|                                                                                     | SS-12-500 MB-G                                                                      | 12W                   | 220-240VAC             | 500mA                  | 14.5-24V         | 81%                  | 0.8                | 60*34*23.5mm   |              |
|                                                                                     | Page 64                                                                             | SS-12-700 MB-G        | 12W                    | 220-240VAC             | 700mA            | 10-18V               | 81%                | 0.8            | 60*34*23.5mm |
|  | SS-9-200 MX-G                                                                       | 9W                    | 220-240VAC             | 200mA                  | 27-45V           | 81%                  | 0.7                | 55*41*21.5mm   |              |
|                                                                                     | SS-9-300 MX-G                                                                       | 9W                    | 220-240VAC             | 300mA                  | 18-30V           | 81%                  | 0.7                | 55*41*21.5mm   |              |
|                                                                                     | SS-9-350 MX-G                                                                       | 9W                    | 220-240VAC             | 350mA                  | 15-26V           | 81%                  | 0.7                | 55*41*21.5mm   |              |
|                                                                                     | SS-9-700 MX-G                                                                       | 9W                    | 220-240VAC             | 700mA                  | 7-13V            | 81%                  | 0.7                | 55*41*21.5mm   |              |
|                                                                                     | SS-12-300 MX-G                                                                      | 12W                   | 220-240VAC             | 300mA                  | 24-40V           | 80%                  | 0.7                | 55*41*21.5mm   |              |
|                                                                                     | SS-12-350 MX-G                                                                      | 12W                   | 220-240VAC             | 350mA                  | 20-34.5V         | 80%                  | 0.7                | 55*41*21.5mm   |              |
|                                                                                     | SS-12-500 MX-G                                                                      | 12W                   | 220-240VAC             | 500mA                  | 14.5-24V         | 80%                  | 0.7                | 55*41*21.5mm   |              |
|                                                                                     | Page 65                                                                             | SS-12-700 MX-G        | 12W                    | 220-240VAC             | 700mA            | 10-18V               | 80%                | 0.7            | 55*41*21.5mm |
|                                                                                     |  | SH-3-300 IP65 SB      | 3W                     | 100-240VAC             | 300mA            | 2.5-12V              | 68%                | 0.5            | 47*23*21mm   |
|                                                                                     |                                                                                     | SH-3-350 IP65 SB      | 3W                     | 100-240VAC             | 350mA            | 2.5-10V              | 68%                | 0.5            | 47*23*21mm   |
| SH-3-500 IP65 SB                                                                    |                                                                                     | 3W                    | 100-240VAC             | 500mA                  | 2.5-7V           | 68%                  | 0.5                | 47*23*21mm     |              |
| Page 66                                                                             |                                                                                     | SH-3-700 IP65 SB      | 3W                     | 100-240VAC             | 700mA            | 2.5-4.5V             | 68%                | 0.5            | 47*23*21mm   |

Page 65

Page 66

迷你型 MINI

Intelligent  
- DALI+0-10V

Intelligent

- DALI+0-10V

型号

Model

功率

Power

输入电压

Input Voltage

输出电流

Output Current

输出电压

Output Voltage

效率

Efficiency

功率因数

Power Factor

尺寸

Size (L\*W\*H)

FLX-42-1050 DALI-2 0-10 LN PRO

42W

100-240VAC

150-1050mA

2.5-49V

89%

0.95

97\*43\*30mm

Page 68

Page 68

Intelligent  
- DALI-2 DT8

Intelligent

- DALI-2 DT8



| 型号<br>Model                   | 功率<br>Power | 输入电压<br>Input Voltage | 输出电流<br>Output Current | 输出电压<br>Output Voltage | 效率<br>Efficiency | 功率因数<br>Power Factor | 尺寸<br>Size (L*W*H) |
|-------------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FLS-20-500 DALI-2 DT8 LN ADV  | 20W         | 220-240VAC            | 150-500mA              | 2.5-49V                | 87%              | 0.95                 | 113*43*25mm        |
| FLS-42-1050 DALI-2 DT8 LN ADV | 42W         | 220-240VAC            | 300-1050mA             | 2.5-49V                | 90%              | 0.95                 | 113*43*25mm        |
| FLS-20-500 DALI-2 DT8 LN PRO  | 20W         | 220-240VAC            | 80-500mA               | 2.5-49V                | 87%              | 0.95                 | 113*43*25mm        |
| FLS-42-1050 DALI-2 DT8 LN PRO | 42W         | 220-240VAC            | 300-1050mA             | 2.5-49V                | 90%              | 0.95                 | 113*43*25mm        |
| FLS-60-1500 DALI-2 DT8 LN PRO | 60W         | 220-240VAC            | 900-1500mA             | 9-49V                  | 90%              | 0.95                 | 113*43*25mm        |


Page 69

Page 69

Intelligent  
- DALI-2

Intelligent

- DALI-2

| 型号<br>Model                                                                           | 功率<br>Power                | 输入电压<br>Input Voltage | 输出电流<br>Output Current | 输出电压<br>Output Voltage | 效率<br>Efficiency | 功率因数<br>Power Factor | 尺寸<br>Size (L*W*H) |             |
|---------------------------------------------------------------------------------------|----------------------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|-------------|
|    | FLS-12-300 DALI-2 LD1 ADV  | 12W                   | 220-240V               | 150-300mA              | 24-42V           | 91%                  | 0.95               | 98*43*22mm  |
|                                                                                       | FLS-30-700 DALI-2 LD1 ADV  | 30W                   | 220-240V               | 350-700mA              | 24-42V           | 93%                  | 0.95               | 98*43*22mm  |
|                                                                                       | FLS-42-1050 DALI-2 LD1 ADV | 42W                   | 220-240V               | 700-1050mA             | 24-42V           | 93%                  | 0.95               | 98*43*22mm  |
|  | FLS-36-850 DALI-2 CCT LD   | 36W                   | 220-240VAC             | 550-850mA              | 24-42V           | 92%                  | 0.95               | 113*43*25mm |
|                                                                                       | FLS-42-1050 DALI-2 CCT LD  | 42W                   | 220-240VAC             | 500-1050mA             | 25-42V           | 92%                  | 0.95               | 113*43*25mm |
|  | FLS-30-700 DALI-2 LD ECO   | 30W                   | 220-240VAC             | 150-700mA              | 24-42V           | 87%                  | 0.97               | 97*43*30mm  |
|                                                                                       | FLS-44-1050 DALI-2 LD ECO  | 44W                   | 220-240VAC             | 700-1050mA             | 24-42V           | 89%                  | 0.97               | 97*43*30mm  |
|                                                                                       | FLS-42-1050 DALI-2 LD ADV  | 42W                   | 220-240VAC             | 150-1050mA             | 2.5-52V          | 87%                  | 0.95               | 97*43*30mm  |
|  | FLS-20-500 DALI-2 LD PRO   | 20W                   | 220-240VAC             | 80-500mA               | 2.5-49V          | 87%                  | 0.95               | 88*40*22mm  |
|                                                                                       | FLS-30-700 DALI-2 LD PRO   | 30W                   | 220-240VAC             | 150-700mA              | 2.5-49V          | 90%                  | 0.95               | 98*43*22mm  |
|                                                                                       | FLS-42-1050 DALI-2 LD PRO  | 42W                   | 220-240VAC             | 300-1050mA             | 2.5-49V          | 90%                  | 0.95               | 98*43*22mm  |
|                                                                                       | FLS-42-1050 DALI-2 LD1 PRO | 42W                   | 220-240VAC             | 150-1050mA             | 2.5-49V          | 90%                  | 0.95               | 98*43*22mm  |
|                                                                                       | FLS-60-1500 DALI-2 LD PRO  | 60W                   | 220-240VAC             | 900-1500mA             | 9-49V            | 90%                  | 0.95               | 113*43*25mm |
|  | FLS-42-1050 DALI-2 LD2 PRO | 42W                   | 220-240VAC             | 300-1050mA             | 2.5-49V          | 90%                  | 0.95               | 98*43*22mm  |
|  | FLS-20-500 DALI-2 LN PRO   | 20W                   | 220-240VAC             | 80-500mA               | 2.5-49V          | 87%                  | 0.95               | 88*40*22mm  |
|                                                                                       | FLS-30-700 DALI-2 LN PRO   | 30W                   | 220-240VAC             | 150-700mA              | 2.5-49V          | 89%                  | 0.95               | 98*43*22mm  |

Page 75

Intelligent  
- 0-10V

Intelligent

- 0-10V



| 型号<br>Model             | 功率<br>Power | 输入电压<br>Input Voltage | 输出电流<br>Output Current | 输出电压<br>Output Voltage | 效率<br>Efficiency | 功率因数<br>Power Factor | 尺寸<br>Size (L*W*H) |
|-------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FLS-20-500 0-10 LD ADV  | 20W         | 220-240VAC            | 350-500mA              | 9-42V                  | 84%              | 0.95                 | 98*43*22mm         |
| FLS-32-700 0-10 LD ADV  | 32W         | 220-240VAC            | 550-700mA              | 9-42V                  | 85%              | 0.95                 | 98*43*22mm         |
| FLS-42-1050 0-10 LD ADV | 42W         | 220-240VAC            | 700-1050mA             | 9-42V                  | 86%              | 0.95                 | 113*43*25mm        |
| FLS-60-1500 0-10 LD ADV | 60W         | 220-240VAC            | 1150-1500mA            | 9-42V                  | 88%              | 0.95                 | 123*43*25mm        |

Page 76

Page 76

迷你型 MINI

| Intelligent<br>- Wireless                                                         |         | 型号<br>Model                 | 功率<br>Power | 输入电压<br>Input Voltage | 输出电流<br>Output Current | 输出电压<br>Output Voltage | 效率<br>Efficiency | 功率因数<br>Power Factor | 尺寸<br>Size (L*W*H) |
|-----------------------------------------------------------------------------------|---------|-----------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
|  | Page 77 | FLS-42-1050 Blue LD-CSB ADV | 42W         | 220-240VAC            | 150-1050mA             | 2.5-49V                | 89%              | 0.95                 | 97*43*30mm         |

| ON/OFF<br>- High Eff.                                                             |         | 型号<br>Model         | 功率<br>Power | 输入电压<br>Input Voltage | 输出电流<br>Output Current | 输出电压<br>Output Voltage | 效率<br>Efficiency | 功率因数<br>Power Factor | 尺寸<br>Size (L*W*H) |
|-----------------------------------------------------------------------------------|---------|---------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
|  | Page 78 | FLS-20-500 LD1 PRO  | 20W         | 220-240VAC            | 350-500mA              | 27-40V                 | 93%              | 0.95                 | 98*43*22mm         |
|                                                                                   |         | FLS-30-700 LD1 PRO  | 30W         | 220-240VAC            | 550-700mA              | 27-40V                 | 94%              | 0.95                 | 98*43*22mm         |
|                                                                                   |         | FLS-38-900 LD1 PRO  | 38W         | 220-240VAC            | 750-900mA              | 27-40V                 | 94%              | 0.95                 | 98*43*22mm         |
|                                                                                   |         | FLS-42-1050 LD1 PRO | 42W         | 220-240VAC            | 900-1050mA             | 27-40V                 | 94%              | 0.95                 | 98*43*22mm         |

| ON/OFF<br>- CCT                                                                   |         | 型号<br>Model        | 功率<br>Power | 输入电压<br>Input Voltage | 输出电流<br>Output Current | 输出电压<br>Output Voltage | 效率<br>Efficiency | 功率因数<br>Power Factor | 尺寸<br>Size (L*W*H) |
|-----------------------------------------------------------------------------------|---------|--------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
|  | Page 79 | FLS-36-850 CCT LD  | 36W         | 220-240VAC            | 550-850mA              | 30-40V                 | 90%              | 0.95                 | 113*43*25mm        |
|                                                                                   |         | FLS-42-1050 CCT LD | 42W         | 220-240VAC            | 500-1050mA             | 25-40V                 | 90%              | 0.95                 | 113*43*25mm        |

| ON/OFF<br>- Dip Switch                                                              |         | 型号<br>Model         | 功率<br>Power | 输入电压<br>Input Voltage | 输出电流<br>Output Current | 输出电压<br>Output Voltage | 效率<br>Efficiency | 功率因数<br>Power Factor | 尺寸<br>Size (L*W*H) |
|-------------------------------------------------------------------------------------|---------|---------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
|  | Page 80 | FLS-21-500 LD1 EXC  | 21W         | 220-240VAC            | 350-500mA              | 27-42V                 | 85%              | 0.95                 | 88*40*22mm         |
|                                                                                     |         | FLS-30-700 LD1 EXC  | 30W         | 220-240VAC            | 550-700mA              | 9-42V                  | 89%              | 0.95                 | 88*40*22mm         |
|                                                                                     |         | FLS-38-900 LD1 EXC  | 38W         | 220-240VAC            | 750-900mA              | 9-42V                  | 89%              | 0.95                 | 88*40*22mm         |
|                                                                                     |         | FLS-40-1050 LD1 EXC | 40W         | 220-240VAC            | 900-1050mA             | 9-42V                  | 90%              | 0.95                 | 88*40*22mm         |
|  | Page 81 | FLS-42-1050 LD PRO  | 42W         | 220-240VAC            | 150-1050mA             | 2.5-42V                | 89%              | 0.95                 | 98*43*22mm         |
|                                                                                     |         | FLS-42-1050 LD1 ADV | 42W         | 220-240VAC            | 300-1050mA             | 9-40V                  | 89%              | 0.95                 | 98*43*22mm         |

TRACK

| Intelligent<br>- DALI-2 DT8                                                         |         | 型号<br>Model              | 功率<br>Power | 输入电压<br>Input Voltage | 输出电流<br>Output Current | 输出电压<br>Output Voltage | 效率<br>Efficiency | 功率因数<br>Power Factor | 尺寸<br>Size (L*W*H) |
|-------------------------------------------------------------------------------------|---------|--------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
|  | Page 83 | FDS-28-750 DALI-2 DT8 LD | 28W         | 220-240VAC            | 100-750mA              | 10-42V                 | 86%              | 0.95                 | 218*31*42mm        |

| Intelligent<br>- DALI-2                                                             |         | 型号<br>Model               | 功率<br>Power | 输入电压<br>Input Voltage | 输出电流<br>Output Current | 输出电压<br>Output Voltage | 效率<br>Efficiency | 功率因数<br>Power Factor | 尺寸<br>Size (L*W*H) |
|-------------------------------------------------------------------------------------|---------|---------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
|  | Page 84 | FDS-42-1050 DALI-2 LD PRO | 42W         | 220-240VAC            | 300-1050mA             | 2.5-42V                | 89%              | 0.95                 | 202*31*42mm        |
|                                                                                     | Page 85 | FDS-42-1050 DALI-2 LD EXC | 42W         | 220-240VAC            | 300-1050mA             | 10-42V                 | 88%              | 0.95                 | 178*31*42mm        |

| Intelligent<br>- CASAMBI                                                            |         | 型号<br>Model            | 功率<br>Power | 输入电压<br>Input Voltage | 输出电流<br>Output Current | 输出电压<br>Output Voltage | 效率<br>Efficiency | 功率因数<br>Power Factor | 尺寸<br>Size (L*W*H) |
|-------------------------------------------------------------------------------------|---------|------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
|  | Page 86 | FDS-32-800 Blue LN-CSB | 32W         | 220-240VAC            | 200-800mA              | 2.5-49V                | 89%              | 0.95                 | 161*31*42mm        |

| ON/OFF<br>- Three Phases                                                              |         | 型号<br>Model             | 功率<br>Power | 输入电压<br>Input Voltage | 输出电流<br>Output Current | 输出电压<br>Output Voltage | 效率<br>Efficiency | 功率因数<br>Power Factor | 尺寸<br>Size (L*W*H) |
|---------------------------------------------------------------------------------------|---------|-------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
|  | Page 87 | FDS-40-1050 CCT LD2 PRO | 40W         | 220-240VAC            | 300-1050mA             | 9-40V                  | 90%              | 0.95                 | 133*31*42mm        |
|                                                                                       |         | FDS-40-1050 LD2 PRO     | 40W         | 220-240VAC            | 300-1050mA             | 9-40V                  | 90%              | 0.95                 | 133*31*42mm        |
|  | Page 88 | FDS-42-1050 CCT LD      | 42W         | 220-240VAC            | 800-1050mA             | 10-42V                 | 89%              | 0.95                 | 178*31*42mm        |
|                                                                                       |         |                         |             |                       |                        |                        |                  |                      |                    |
|  | Page 89 | FDS-20-500 LD EXC S     | 20W         | 220-240VAC            | 150-500mA              | 10-40V                 | 90%              | 0.95                 | 123*31*42mm        |
|                                                                                       |         | FDS-28-750 LD EXC S     | 28W         | 220-240VAC            | 100-750mA              | 10-40V                 | 88%              | 0.95                 | 123*31*42mm        |
|                                                                                       |         | FDS-42-1050 LD EXC S    | 42W         | 220-240VAC            | 700-1050mA             | 10-42V                 | 90%              | 0.95                 | 133*31*42mm        |
|  | Page 90 | FDS-18-450 LD2 EXC      | 18W         | 220-240VAC            | 200-450mA              | 24-42V                 | 89%              | 0.95                 | 155*31*42mm        |
|                                                                                       |         | FDS-30-750 LD2 EXC      | 30W         | 220-240VAC            | 500-750mA              | 24-42V                 | 90%              | 0.95                 | 155*31*42mm        |
|                                                                                       |         | FDS-42-1050 LD2 EXC     | 42W         | 220-240VAC            | 800-1050mA             | 24-42V                 | 90%              | 0.95                 | 155*31*42mm        |
|  | Page 91 | FDS-42-1050 LD1 EXC     | 42W         | 220-240VAC            | 300-1050mA             | 10-42V                 | 89%              | 0.95                 | 212*31*36mm        |

| ON/OFF<br>- Single phase                                                              |         | 型号<br>Model             | 功率<br>Power | 输入电压<br>Input Voltage | 输出电流<br>Output Current | 输出电压<br>Output Voltage | 效率<br>Efficiency | 功率因数<br>Power Factor | 尺寸<br>Size (L*W*H) |
|---------------------------------------------------------------------------------------|---------|-------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
|  | Page 92 | FDS-12-300 LD2-3 Wires  | 12W         | 220-240VAC            | 150-300mA              | 15-42V                 | 85%              | 0.95                 | 130*34*45.5mm      |
|                                                                                       |         | FDS-21-500 LD2-3 Wires  | 21W         | 220-240VAC            | 350-500mA              | 15-42V                 | 88%              | 0.95                 | 130*34*45.5mm      |
|                                                                                       |         | FDS-30-750 LD2-3 Wires  | 30W         | 220-240VAC            | 600-750mA              | 15-42V                 | 90%              | 0.95                 | 130*34*45.5mm      |
|                                                                                       |         | FDS-42-1050 LD2-3 Wires | 42W         | 220-240VAC            | 700-1050mA             | 15-42V                 | 90%              | 0.95                 | 130*34*45.5mm      |

恒压 C V

| Intelligent<br>- DALI+0-10V                                                                  |  | 型号<br>Model                   | 功率<br>Power | 输入电压<br>Input Voltage | 输出电流<br>Output Current | 输出电压<br>Output Voltage | 效率<br>Efficiency | 功率因数<br>Power Factor | 尺寸<br>Size (L*W*H) |
|----------------------------------------------------------------------------------------------|--|-------------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| <br>Page 94 |  | VTS-200-24 DALI-2 0-10 IP65 L | 200W        | 220-240VAC            | 0-8.33A                | 24V                    | 91%              | 0.95                 | 350*45*33mm        |
|                                                                                              |  | VTS-200-24 DALI-2 0-10 L      | 200W        | 220-240VAC            | 0-8.33A                | 24V                    | 91%              | 0.95                 | 350*45*33mm        |

| Intelligent<br>- DALI-2 DT8                                                                  |  | 型号<br>Model                 | 功率<br>Power | 输入电压<br>Input Voltage | 输出电流<br>Output Current | 输出电压<br>Output Voltage | 效率<br>Efficiency | 功率因数<br>Power Factor | 尺寸<br>Size (L*W*H) |
|----------------------------------------------------------------------------------------------|--|-----------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| <br>Page 95 |  | LS-45-24 DALI-2 DT8 LN ADV  | 45W         | 220-240VAC            | 0-1.875A               | 24V                    | 89%              | 0.95                 | 227*38*30mm        |
|                                                                                              |  | LS-45-24 DALI-2 DT8 LI1     | 45W         | 220-240VAC            | 0-1.88A                | 24V                    | 89%              | 0.95                 | 227*38*30mm        |
|                                                                                              |  | LS-80-24 DALI-2 DT8 LN ADV  | 80W         | 220-240VAC            | 0-3.33A                | 24V                    | 89%              | 0.95                 | 318*38*30mm        |
|                                                                                              |  | LS-80-24 DALI-2 DT8 LI1     | 80W         | 220-240VAC            | 0-3.33A                | 24V                    | 89%              | 0.95                 | 318*38*30mm        |
|                                                                                              |  | LS-150-24 DALI-2 DT8 LN ADV | 150W        | 220-240VAC            | 0-6.25A                | 24V                    | 90%              | 0.95                 | 318*38*30mm        |
|                                                                                              |  | LS-150-24 DALI-2 DT8 LI1    | 150W        | 220-240VAC            | 0-6.25A                | 24V                    | 91%              | 0.95                 | 318*38*30mm        |

| Intelligent<br>- DALI-2                                                                        |  | 型号<br>Model          | 功率<br>Power | 输入电压<br>Input Voltage | 输出电流<br>Output Current | 输出电压<br>Output Voltage | 效率<br>Efficiency | 功率因数<br>Power Factor | 尺寸<br>Size (L*W*H) |
|------------------------------------------------------------------------------------------------|--|----------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| <br>Page 96  |  | LS-45-24 DALI-2 LI1  | 45W         | 220-240VAC            | 0-1.88A                | 24V                    | 87%              | 0.95                 | 168*38*30mm        |
|                                                                                                |  | LS-80-24 DALI-2 LI1  | 80W         | 220-240VAC            | 0-3.33A                | 24V                    | 89%              | 0.95                 | 227*38*30mm        |
|                                                                                                |  | LS-150-24 DALI-2 LI1 | 120W        | 220-240VAC            | 0-6.25A                | 24V                    | 91%              | 0.95                 | 318*38*30mm        |
|                                                                                                |  | LS-250-24 DALI-2 LI  | 250W        | 220-240VAC            | 0-10.41A               | 24V                    | 91%              | 0.95                 | 431*45*30mm        |
| <br>Page 97 |  | US-30-24 DALI-2 LI   | 30W         | 220-240VAC            | 0-1.25A                | 24V                    | 85%              | 0.95                 | 298*30*16mm        |
|                                                                                                |  | US-60-24 DALI-2 LI   | 60W         | 220-240VAC            | 0-2.5A                 | 24V                    | 89%              | 0.95                 | 298*30*16mm        |
|                                                                                                |  | US-100-24 DALI-2 LI  | 100W        | 220-240VAC            | 0-4.16A                | 24V                    | 89%              | 0.95                 | 298*30*16mm        |

| Intelligent<br>- 0-10V                                                                         |  | 型号<br>Model       | 功率<br>Power | 输入电压<br>Input Voltage | 输出电流<br>Output Current | 输出电压<br>Output Voltage | 效率<br>Efficiency | 功率因数<br>Power Factor | 尺寸<br>Size (L*W*H) |
|------------------------------------------------------------------------------------------------|--|-------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| <br>Page 98 |  | LS-45-24 0-10 LI  | 45W         | 220-240VAC            | 0-1.88A                | 24V                    | 87%              | 0.95                 | 168*38*30mm        |
|                                                                                                |  | LS-80-24 0-10 LI  | 80W         | 220-240VAC            | 0-3.33A                | 24V                    | 89%              | 0.95                 | 227*38*30mm        |
|                                                                                                |  | LS-150-24 0-10 LI | 150W        | 220-240VAC            | 0-6.25A                | 24V                    | 92%              | 0.95                 | 318*38*30mm        |
|                                                                                                |  | LS-250-24 0-10 LI | 250W        | 220-240VAC            | 0-10.41A               | 24V                    | 91%              | 0.95                 | 431*45*30.5mm      |

| ON/OFF<br>- Silm                                                                               |  | 型号<br>Model      | 功率<br>Power | 输入电压<br>Input Voltage | 输出电流<br>Output Current | 输出电压<br>Output Voltage | 效率<br>Efficiency | 功率因数<br>Power Factor | 尺寸<br>Size (L*W*H) |
|------------------------------------------------------------------------------------------------|--|------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| <br>Page 99 |  | LS-30-12 LI1 EXC | 30W         | 220-240VAC            | 0-2.5A                 | 12V                    | 86%              | 0.95                 | 116*41.2*26mm      |
|                                                                                                |  | LS-30-24 LI1 EXC | 30W         | 220-240VAC            | 0-1.25A                | 24V                    | 86%              | 0.95                 | 116*41.2*26mm      |
|                                                                                                |  | LS-30-48 LI1 EXC | 30W         | 220-240VAC            | 0-0.625A               | 48V                    | 86%              | 0.95                 | 116*41.2*26mm      |
|                                                                                                |  | LS-60-12 LI1 EXC | 60W         | 220-240VAC            | 0-5A                   | 12V                    | 88%              | 0.95                 | 150*45*30mm        |
|                                                                                                |  | LS-60-24 LI1 EXC | 60W         | 220-240VAC            | 0-2.5A                 | 24V                    | 88%              | 0.95                 | 150*45*30mm        |
|                                                                                                |  | LS-75-12 LI1 EXC | 75W         | 220-240VAC            | 0-6.25A                | 12V                    | 89%              | 0.95                 | 150*45*30mm        |
|                                                                                                |  | LS-75-24 LI1 EXC | 75W         | 220-240VAC            | 0-3.13A                | 24V                    | 89%              | 0.95                 | 150*45*30mm        |
|                                                                                                |  |                  |             |                       |                        |                        |                  |                      |                    |

恒压 C V

| ON/OFF<br>- Silm                                                                                |  | 型号<br>Model      | 功率<br>Power | 输入电压<br>Input Voltage | 输出电流<br>Output Current | 输出电压<br>Output Voltage | 效率<br>Efficiency | 功率因数<br>Power Factor | 尺寸<br>Size (L*W*H) |
|-------------------------------------------------------------------------------------------------|--|------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| <br>Page 100 |  | LS-30-12 LI EXC  | 30W         | 220-240VAC            | 0-2.5A                 | 12V                    | 87%              | 0.95                 | 136*38*28mm        |
|                                                                                                 |  | LS-30-24 LI EXC  | 30W         | 220-240VAC            | 0-1.25A                | 24V                    | 87%              | 0.95                 | 136*38*28mm        |
|                                                                                                 |  | LS-60-12 LI EXC  | 60W         | 220-240VAC            | 0-5A                   | 12V                    | 88%              | 0.95                 | 168*38*30mm        |
|                                                                                                 |  | LS-60-24 LI EXC  | 60W         | 220-240VAC            | 0-2.5A                 | 24V                    | 88%              | 0.95                 | 168*38*30mm        |
|                                                                                                 |  | LS-75-12 LI EXC  | 75W         | 220-240VAC            | 0-6.25A                | 12V                    | 88%              | 0.95                 | 168*38*30mm        |
|                                                                                                 |  | LS-75-24 LI EXC  | 75W         | 220-240VAC            | 0-3.13A                | 24V                    | 89%              | 0.95                 | 168*38*30mm        |
|                                                                                                 |  | LS-75-48 LI EXC  | 75W         | 220-240VAC            | 0-1.56A                | 48V                    | 9%               | 0.95                 | 168*38*30mm        |
|                                                                                                 |  | LS-120-24 LI EXC | 120W        | 220-240VAC            | 0-5A                   | 24V                    | 93%              | 0.95                 | 227*38*30mm        |
|                                                                                                 |  | LS-120-48 LI EXC | 120W        | 220-240VAC            | 0-2.5A                 | 48V                    | 93%              | 0.95                 | 227*38*30mm        |
|                                                                                                 |  | LS-150-24 LI EXC | 150W        | 220-240VAC            | 0-6.25A                | 24V                    | 93%              | 0.95                 | 227*38*30mm        |
|                                                                                                 |  | LS-150-48 LI EXC | 150W        | 220-240VAC            | 0-3.13A                | 48V                    | 93%              | 0.95                 | 227*38*30mm        |
|                                                                                                 |  | LS-200-24 LI EXC | 200W        | 220-240VAC            | 0-8.33A                | 24V                    | 93%              | 0.95                 | 318*45*30mm        |
|                                                                                                 |  | LS-200-48 LI EXC | 200W        | 220-240VAC            | 0-4.17A                | 48V                    | 93%              | 0.95                 | 318*45*30mm        |
|                                                                                                 |  | LS-250-24 LI EXC | 250W        | 220-240VAC            | 0-10.4A                | 24V                    | 93%              | 0.95                 | 318*45*30mm        |
|                                                                                                 |  | LS-250-48 LI EXC | 250W        | 220-240VAC            | 0-5.2A                 | 48V                    | 93%              | 0.95                 | 318*45*30mm        |

|                                                                                                 |                  |      |            |          |     |     |      |             |
|-------------------------------------------------------------------------------------------------|------------------|------|------------|----------|-----|-----|------|-------------|
| <br>Page 101 | MS-150-48 LX-YX1 | 150W | 220-240VAC | 0-3.125A | 48V | 92% | 0.95 | 249*34*22mm |
|-------------------------------------------------------------------------------------------------|------------------|------|------------|----------|-----|-----|------|-------------|

| ON/OFF<br>- Ultrathin                                                                             |  | 型号<br>Model        | 功率<br>Power | 输入电压<br>Input Voltage | 输出电流<br>Output Current | 输出电压<br>Output Voltage | 效率<br>Efficiency | 功率因数<br>Power Factor | 尺寸<br>Size (L*W*H) |
|---------------------------------------------------------------------------------------------------|--|--------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| <br>Page 102 |  | US-30-12 LI EXC    | 30W         | 220-240VAC            | 0-2.5A                 | 12V                    | 88%              | 0.95                 | 238*30*16mm        |
|                                                                                                   |  | US-30-24 LI EXC    | 30W         | 220-240VAC            | 0-1.25A                | 24V                    | 88%              | 0.95                 | 238*30*16mm        |
|                                                                                                   |  | US-60-12 LI EXC    | 60W         | 220-240VAC            | 0-5A                   | 12V                    | 88%              | 0.95                 | 298*30*16mm        |
|                                                                                                   |  | US-60-24 LI EXC    | 60W         | 220-240VAC            | 0-2.5A                 | 24V                    | 88%              | 0.95                 | 298*30*16mm        |
|                                                                                                   |  | US-100-12 LI EXC   | 100W        | 220-240VAC            | 0-8.33A                | 12V                    | 90%              | 0.95                 | 353*30*18mm        |
|                                                                                                   |  | US-100-24 LI EXC   | 100W        | 220-240VAC            | 0-4.17A                | 24V                    | 90%              | 0.95                 | 353*30*18mm        |
|                                                                                                   |  | US-150-24 LI EXC   | 150W        | 220-240VAC            | 0-6.25A                | 24V                    | 93%              | 0.95                 | 353*30*18mm        |
|                                                                                                   |  | US-150-48 LI EXC   | 150W        | 220-240VAC            | 0-3.13A                | 48V                    | 93%              | 0.95                 | 353*30*18mm        |
|                                                                                                   |  | US-200-24 LI EXC   | 200W        | 220-240VAC            | 0-8.33A                | 24V                    | 93%              | 0.95                 | 383*30*18mm        |
|                                                                                                   |  | US-200-48 LI EXC   | 200W        | 220-240VAC            | 0-4.17A                | 48V                    | 93%              | 0.95                 | 383*30*18mm        |
|                                                                                                   |  |                    |             |                       |                        |                        |                  |                      |                    |
|                                                                                                   |  | US-30-12 LI EXC S  | 30W         | 220-240VAC            | 0-2.5A                 | 12V                    | 88%              | 0.95                 | 154*50*14mm        |
|                                                                                                   |  | US-30-24 LI EXC S  | 30W         | 220-240VAC            | 0-1.25A                | 24V                    | 88%              | 0.95                 | 154*50*14mm        |
|                                                                                                   |  | US-60-12 LI EXC S  | 60W         | 220-240VAC            | 0-5A                   | 12V                    | 91%              | 0.95                 | 154*50*14mm        |
|                                                                                                   |  | US-60-24 LI EXC S  | 60W         | 220-240VAC            | 0-2.5A                 | 24V                    | 88%              | 0.95                 | 154*50*14mm        |
| <br>Page 103 |  | US-75-12 LI EXC S  | 75W         | 220-240VAC            | 0-6.25A                | 12V                    | 89%              | 0.95                 | 174*50*14.8mm      |
|                                                                                                   |  | US-75-24 LI EXC S  | 75W         | 220-240VAC            | 0-3.125A               | 24V                    | 89%              | 0.95                 | 174*50*14.8mm      |
|                                                                                                   |  | US-100-12 LI EXC S | 100W        | 220-240VAC            | 0-8.33A                | 12V                    | 91%              | 0.95                 | 177*56.4*17.2mm    |
|                                                                                                   |  | US-100-24 LI EXC S | 100W        | 220-240VAC            | 0-4.16A                | 24V                    | 91%              | 0.95                 | 177*56.4*17.2mm    |
|                                                                                                   |  | US-150-12 LI EXC S | 150W        | 220-240VAC            | 0-11A                  | 12V                    | 92%              | 0.95                 | 177*56.4*17.2mm    |
|                                                                                                   |  | US-150-24 LI EXC S | 150W        | 220-240VAC            | 0-6.25A                | 24V                    | 93%              | 0.95                 | 177*56.4*17.2mm    |
|                                                                                                   |  |                    |             |                       |                        |                        |                  |                      |                    |

恒压 C V

| ON/OFF<br>- Lead wire                                                             | 型号<br>Model | 功率<br>Power | 输入电压<br>Input Voltage | 输出电流<br>Output Current | 输出电压<br>Output Voltage | 效率<br>Efficiency | 功率因数<br>Power Factor | 尺寸<br>Size (L*W*H) |
|-----------------------------------------------------------------------------------|-------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
|  | SS-30-12 LB | 30W         | 220-240VAC            | 0-2.75A                | 12V                    | 85%              | 0.95                 | 95*53*23.2mm       |
|                                                                                   | SS-30-24 LB | 30W         | 220-240VAC            | 0-1.25A                | 24V                    | 85%              | 0.95                 | 95*53*23.2mm       |
|                                                                                   | SS-45-12 LB | 45W         | 220-240VAC            | 0-3.75A                | 12V                    | 85%              | 0.95                 | 95*53*23.2mm       |
|                                                                                   | SS-45-24 LB | 45W         | 220-240VAC            | 0-1.88A                | 24V                    | 85%              | 0.95                 | 95*53*23.2mm       |
|                                                                                   | SS-60-24 LB | 60W         | 220-240VAC            | 0-2.5A                 | 24V                    | 87%              | 0.95                 | 110.5*59.5*32.5mm  |

Page 104

| ON/OFF<br>- IP67                                                                  | 型号<br>Model       | 功率<br>Power | 输入电压<br>Input Voltage | 输出电流<br>Output Current | 输出电压<br>Output Voltage | 效率<br>Efficiency | 功率因数<br>Power Factor | 尺寸<br>Size (L*W*H) |
|-----------------------------------------------------------------------------------|-------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
|  | VTS-24-12 IP67 L  | 24W         | 220-240VAC            | 0-2A                   | 12V                    | 86%              | 0.95                 | 118*35*26mm        |
|                                                                                   | VTS-24-24 IP67 L  | 24W         | 220-240VAC            | 0-1A                   | 24V                    | 86%              | 0.95                 | 118*35*26mm        |
|                                                                                   | VTS-40-12 IP67 L  | 40W         | 220-240VAC            | 0-3.34A                | 12V                    | 86%              | 0.95                 | 148*42*30mm        |
|                                                                                   | VTS-40-24 IP67 L  | 40W         | 220-240VAC            | 0-1.67A                | 24V                    | 88%              | 0.95                 | 148*42*30mm        |
|                                                                                   | VTS-60-12 IP67 L  | 60W         | 220-240VAC            | 0-5A                   | 12V                    | 87%              | 0.95                 | 162.5*42.5*32mm    |
|                                                                                   | VTS-60-24 IP67 L  | 60W         | 220-240VAC            | 0-2.5A                 | 24V                    | 89%              | 0.95                 | 162.5*42.5*32mm    |
|                                                                                   | VTS-100-12 IP67 L | 100W        | 220-240VAC            | 0-8.33A                | 12V                    | 87%              | 0.95                 | 190*52*33mm        |
|                                                                                   | VTS-100-24 IP67 L | 100W        | 220-240VAC            | 0-4.17A                | 24V                    | 89%              | 0.95                 | 190*52*33mm        |
|                                                                                   | VTS-160-12 IP67 L | 160W        | 220-240VAC            | 0-13.3A                | 12V                    | 91%              | 0.95                 | 190*52*37.5mm      |
|                                                                                   | VTS-160-24 IP67 L | 160W        | 220-240VAC            | 0-6.67A                | 24V                    | 92%              | 0.95                 | 190*52*37.5mm      |
|                                                                                   | VTS-160-48 IP67 L | 160W        | 220-240VAC            | 0-3.33A                | 48V                    | 92%              | 0.95                 | 190*52*37.5mm      |

Page 105

美规 NORTH AMERICAN

| ON/OFF<br>- 0-10V+Traic                                                             | 型号<br>Model                 | 功率<br>Power | 输入电压<br>Input Voltage | 输出电流<br>Output Current | 输出电压<br>Output Voltage | 效率<br>Efficiency | 功率因数<br>Power Factor | 尺寸<br>Size (L*W*H) |
|-------------------------------------------------------------------------------------|-----------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
|  | FMW-30-750 0-10 TRIAC LD-S  | 30W         | 120-277VAC            | 350-750mA              | 27-42V                 | 85%              | 0.9                  | 108.4*61*25mm      |
|                                                                                     | FMW-50-1250 0-10 TRIAC LD-S | 50W         | 120-277VAC            | 750-1250mA             | 27-42V                 | 85%              | 0.9                  | 108.4*61*25mm      |

Page 107

| ON/OFF<br>- 0-10V                                                                   | 型号<br>Model         | 功率<br>Power | 输入电压<br>Input Voltage | 输出电流<br>Output Current | 输出电压<br>Output Voltage | 效率<br>Efficiency | 功率因数<br>Power Factor | 尺寸<br>Size (L*W*H) |
|-------------------------------------------------------------------------------------|---------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
|  | FMW-30-750 0-10 LN  | 30W         | 120-277VAC            | 350-750mA              | 27-42V                 | 85%              | 0.9                  | 280*30*21mm        |
|                                                                                     | FMW-30-750 0-10 LD  | 30W         | 120-277VAC            | 350-750mA              | 27-42V                 | 85%              | 0.9                  | 280*30*21mm        |
|                                                                                     | FMW-50-1250 0-10 LN | 50W         | 120-277VAC            | 750-1250mA             | 27-42V                 | 86%              | 0.9                  | 280*30*21mm        |
|                                                                                     | FMW-50-1250 0-10 LD | 50W         | 120-277VAC            | 750-1250mA             | 27-42V                 | 85%              | 0.9                  | 280*30*21mm        |

Page 108

配件 ACCESSORIES

| DALI Gateway                                                                        | 型号<br>Model       | 功率<br>Power | 输入电压<br>Input Voltage | 输出电流<br>Output Current | 输出电压<br>Output Voltage | 效率<br>Efficiency | 功率因数<br>Power Factor | 尺寸<br>Size (L*W*H) |
|-------------------------------------------------------------------------------------|-------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
|  | ER-GW-DALI-2 02-A | 5W          | 24V                   | 250mA*2                | 16V*2                  | /                | /                    | 108*64*88mm        |

Page 110

| DALI Dimmer                                                                         | 型号<br>Model             | 功率<br>Power | 输入电压<br>Input Voltage | 输出电流<br>Output Current | 输出电压<br>Output Voltage | 效率<br>Efficiency | 功率因数<br>Power Factor | 尺寸<br>Size (L*W*H) |
|-------------------------------------------------------------------------------------|-------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
|  | ER-T-DALI-2 DT8 JQ-01 A | 0.8W        | 16V                   | 50mA                   | 16V                    | /                | /                    | 80*80*28mm         |

Page 111

| DALI Panel                                                                           | 型号<br>Model       | 功率<br>Power | 输入电压<br>Input Voltage | 输出电流<br>Output Current | 输出电压<br>Output Voltage | 效率<br>Efficiency | 功率因数<br>Power Factor | 尺寸<br>Size (L*W*H) |
|--------------------------------------------------------------------------------------|-------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
|  | ER-SP-DALI-2 06-A | /           | 16V                   | /                      | /                      | /                | /                    | 86*86*38mm         |

Page 112

| DALI Sensor                                                                           | 型号<br>Model       | 功率<br>Power | 输入电压<br>Input Voltage | 输出电流<br>Output Current | 输出电压<br>Output Voltage | 效率<br>Efficiency | 功率因数<br>Power Factor | 尺寸<br>Size (L*W*H) |
|---------------------------------------------------------------------------------------|-------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
|  | ER-BS-DALI-2 01-A | /           | 16V                   | /                      | /                      | /                | /                    | Φ38*46.3mm         |

Page 113

其他 OTHERS

|                           |          |
|---------------------------|----------|
| 可选配件 Optional Accessories | Page 114 |
|---------------------------|----------|

|                                       |          |
|---------------------------------------|----------|
| 新旧产品替换表 Old Product Replacement Table | Page 116 |
|---------------------------------------|----------|

# 线性系列



## LED DRIVER LINEAR SERIES

应用场景：  
线性灯  
三防灯

### 线性 - 非隔离智能系列

#### D4i+DALI-2+NFC

- 可适配I类灯具  
· For luminaire of protection class I
- 非隔离/ 内置式  
· Non Isolated/ Built-in
- 输入电压 220-240 VAC  
· Input Voltage 220-240 VAC
- 多重保护：短路保护/ 过载保护/ 过压保护/ 过温保护  
· Protection: SCP/ OLP/ OVP/ OTP
- 支持DALI、Push调光  
· DALI dimming, PUSH dimming
- 含DALI-2协议250, 251, 252及253  
· DALI-2 Parts 250, 251, 252 and 253
- NFC调节输出电流  
· Output current adjust via NFC
- 集成DALI-2总线电源  
· Integrated DALI-2 bus power supply
- 5年质保  
· 5 years warranty
- Ta, Tc: 60°C/ 85°C  
· Ta, Tc: 60°C/ 85°C

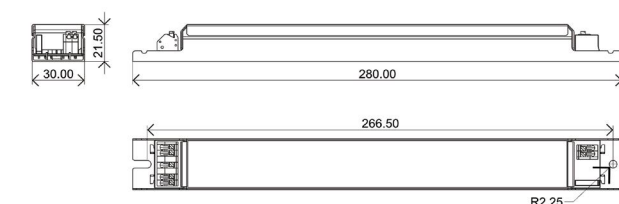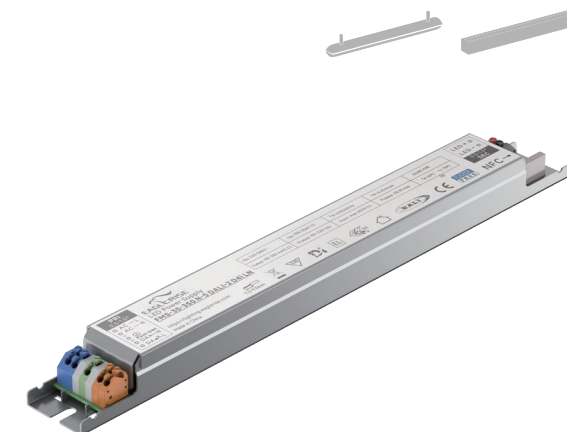


| Model<br>型号                    | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|--------------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FMS-35-350 N-S DALI-2 D4i LN   | 35W         | 220-240VAC            | 80-350mA               | 50-220V                | 92%              | 0.95                 | 280*30*21mm        |
| FMS-75-500 N-S DALI-2 D4i LN   | 75W         | 220-240VAC            | 150-500mA              | 50-220V                | 93%              | 0.95                 | 360*30*21mm        |
| FMS-100-1050 N-S DALI-2 D4i LN | 100W        | 220-240VAC            | 300-1050mA             | 50-220V                | 94%              | 0.95                 | 360*30*21mm        |
| FMS-150-1050 N-S DALI-2 D4i LN | 150W        | 220-240VAC            | 300-1050mA             | 50-220V                | 95%              | 0.95                 | 360*30*21mm        |

线性 - 非隔离智能系列

DALI-2+拨码

- 可适配I/ II类灯具
- For luminaire of protection class I and II
- 非隔离/内置式/独立式（带侧盖）
- Non Isolated/ Built-in/ Independent (with side caps)
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 支持DALI、PUSH调光，走廊模式
- DALI dimming, PUSH dimming, Corridor mode
- 含DALI-2协议251, 252及253
- DALI-2 Parts 251、252、253
- 调光范围：1%-100%
- Dimming range: 1%-100%
- 拨码调节输出电流，共16个电流档位
- Output current adjust via DIP-switch, 16 current steps
- 符合ZHAGA协议
- ZHAGA protocol
- 效率>95%; 功率因数>0.95
- Efficiency>95%; Power Factor>0.95
- 适用于应急照明，符合EN 50172
- Suitable for emergency lighting acc. to EN 50172
- 5年质保
- 5 years warranty
- Ta, Tc: 60°C/ 80°C
- Ta, Tc: 60°C/ 80°C

| Model<br>型号                | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|----------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FMS-35-350 N-S DALI-2 LD   | 35W         | 220-240VAC            | 80-350mA               | 50-220V                | 92%              | 0.95                 | 280*30*21mm        |
| FMS-75-500 N-S DALI-2 LD   | 75W         | 220-240VAC            | 150-500mA              | 50-220V                | 93%              | 0.95                 | 280*30*21mm        |
| FMS-100-1050 N-S DALI-2 LD | 100W        | 220-240VAC            | 300-1050mA             | 50-220V                | 94%              | 0.95                 | 280*30*21mm        |
| FMS-150-1050 N-S DALI-2 LD | 150W        | 220-240VAC            | 300-1050mA             | 50-220V                | 95%              | 0.95                 | 280*30*21mm        |

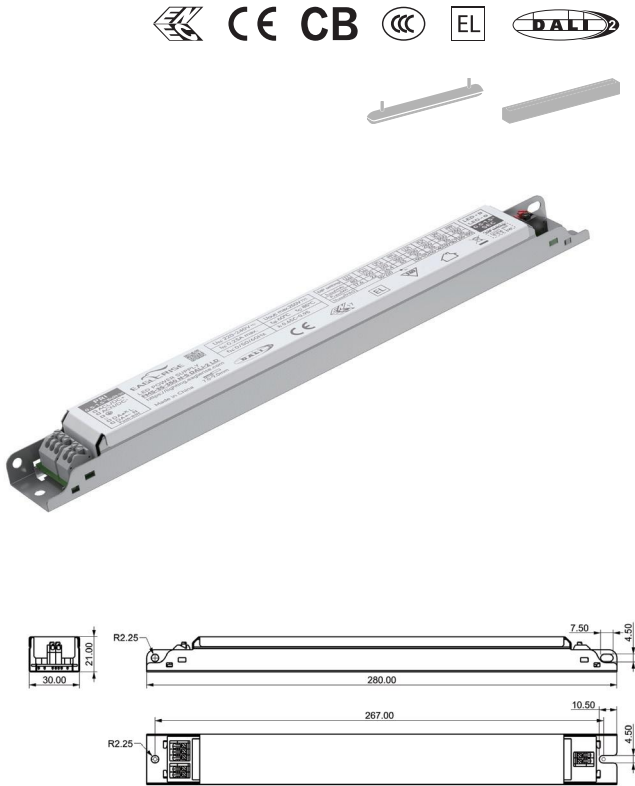

线性 - 非隔离智能系列

DALI-2+NFC

- 可适配I/ II类灯具
- For luminaire of protection class I and II
- 非隔离/内置式
- Non Isolated/ Built-in
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 支持DALI、PUSH调光，走廊模式
- DALI dimming, PUSH dimming, Corridor mode
- 含DALI-2协议251, 252及253
- DALI-2 Parts 251、252、253
- 调光范围：1%-100%
- Dimming range: 1%-100%
- NFC调节输出电流
- Output current adjust via NFC
- 符合ZHAGA协议
- ZHAGA protocol
- 效率>95%; 功率因数>0.95
- Efficiency>95%; Power Factor>0.95
- 适用于应急照明，符合EN 50172
- Suitable for emergency lighting acc. to EN 50172
- 5年质保
- 5 years warranty
- Ta, Tc: 60°C/ 80°C
- Ta, Tc: 60°C/ 80°C

| Model<br>型号                    | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|--------------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FMS-35-350 N-S DALI-2 LN EXC   | 35W         | 220-240VAC            | 80-350mA               | 50-220V                | 92%              | 0.95                 | 280*30*21mm        |
| FMS-75-500 N-S DALI-2 LN EXC   | 75W         | 220-240VAC            | 150-500mA              | 50-220V                | 93%              | 0.95                 | 280*30*21mm        |
| FMS-100-1050 N-S DALI-2 LN EXC | 100W        | 220-240VAC            | 300-1050mA             | 50-220V                | 94%              | 0.95                 | 280*30*21mm        |
| FMS-150-1050 N-S DALI-2 LN EXC | 150W        | 220-240VAC            | 300-1050mA             | 50-220V                | 95%              | 0.95                 | 280*30*21mm        |



线性 - 非隔离系列

ON/OFF (拨码)

- 可适配I/ II类灯具
- For luminaire of protection class I and II
- 非隔离/内置式
- Non Isolated/ Built-in
- 输入电压 220-240VAC、176-280VDC
- Input voltage: 220-240VAC, 176-280VDC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 拨码调节电流
- Output current adjusted via DIP-switch
- 功率因数：0.95 (Typ.)
- Power Factor: 0.95(Typ.)
- 效率>94%
- Efficiency> 94%
- IP20
- IP20
- 5年质保
- 5 years warranty
- Ta, Tc: 50°C/ 85°C
- Ta, Tc: 50°C/ 85°C




| Model<br>型号          | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|----------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FMS-20-350 N-S LD2 E | 20W         | 220-240VAC            | 100-350mA              | 25-100V                | 86%              | 0.95                 | 168*30*21mm        |
| FMS-40-350 N-S LD2 E | 40W         | 220-240VAC            | 200-350mA              | 40-200V                | 90%              | 0.95                 | 168*30*21mm        |
| FMS-60-350 N-S LD2 E | 60W         | 220-240VAC            | 200-350mA              | 70-200V                | 92%              | 0.95                 | 190*30*21mm        |
| FMS-80-350 N-S LD2 E | 80W         | 220-240VAC            | 200-350mA              | 40-220V                | 94%              | 0.95                 | 210*30*21mm        |

线性 - 非隔离系列

ON/OFF (拨码)

- 可适配I/ II类灯具
- For luminaire of protection class I and II
- 非隔离/内置式
- Non Isolated/ Built-in
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 拨码调节输出电流，共4个电流档
- Output current adjusted via DIP-switch, 4 current steps
- 效率>95%
- Efficiency> 95%
- 功率因数>0.95
- Power Factor> 0.95
- 适用于应急照明，符合EN 50172
- Suitable for emergency lighting acc. to EN 50172
- 5年质保
- 5 years warranty
- Ta, Tc: 60°C/ 80°C
- Ta, Tc: 60°C/ 80°C
- CCT版：拨码调节色温
- CCT version: flexible CCT setting via 3-way DIP-switch

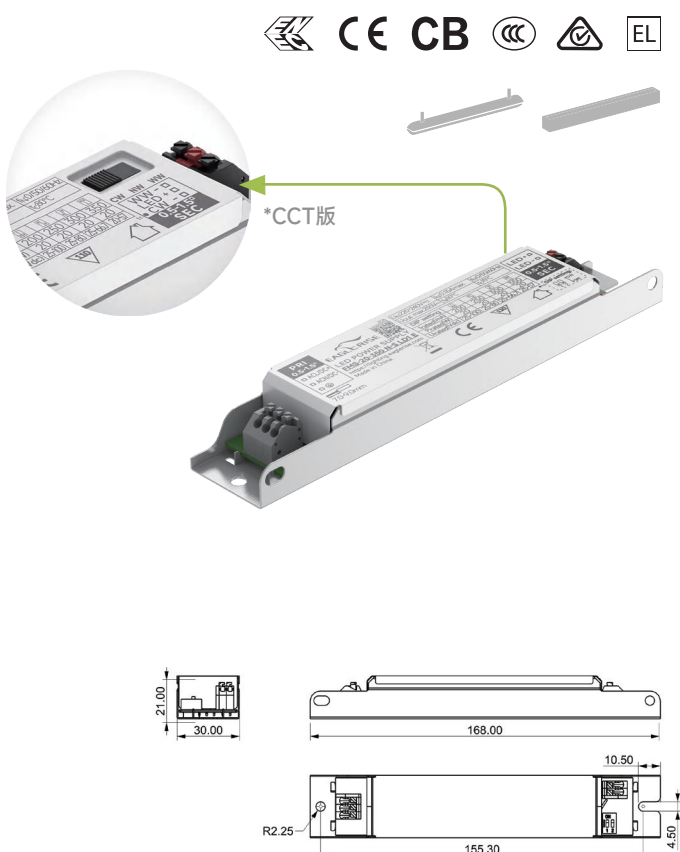

| Model<br>型号                | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|----------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FMS-20-350 N-S LD1 E       | 20W         | 220-240VAC            | 200-350mA              | 25-100V                | 86%              | 0.90                 | 168*30*21mm        |
| FMS-20-350 N-S CCT LD EXC  | 20W         | 220-240VAC            | 200-350mA              | 25-100V                | 86%              | 0.90                 | 168*30*21mm        |
| FMS-40-350 N-S LD1 E       | 40W         | 220-240VAC            | 200-350mA              | 40-200V                | 90%              | 0.90                 | 168*30*21mm        |
| FMS-40-350 N-S CCT LD EXC  | 40W         | 220-240VAC            | 200-350mA              | 40-200V                | 90%              | 0.95                 | 168*30*21mm        |
| FMS-60-350 N-S LD1 E       | 60W         | 220-240VAC            | 200-350mA              | 70-200V                | 92%              | 0.95                 | 190*30*21mm        |
| FMS-60-350 N-S CCT LD EXC  | 60W         | 220-240VAC            | 200-350mA              | 70-200V                | 92%              | 0.95                 | 190*30*21mm        |
| FMS-80-350 N-S LD1 E       | 80W         | 220-240VAC            | 200-350mA              | 40-220V                | 94%              | 0.95                 | 210*30*21mm        |
| FMS-80-350 N-S CCT LD EXC  | 80W         | 220-240VAC            | 200-350mA              | 40-220V                | 94%              | 0.95                 | 210*30*21mm        |
| FMS-80-550 N-S LD1 E       | 80W         | 220-240VAC            | 350-550mA              | 40-216V                | 93%              | 0.95                 | 210*30*21mm        |
| FMS-80-550 N-S CCT LD EXC  | 80W         | 220-240VAC            | 350-550mA              | 40-216V                | 93%              | 0.95                 | 210*30*21mm        |
| FMS-100-500 N-S LD1 E      | 100W        | 220-240VAC            | 350-500mA              | 40-220V                | 95%              | 0.95                 | 280*30*21mm        |
| FMS-100-500 N-S CCT LD EXC | 100W        | 220-240VAC            | 350-500mA              | 40-220V                | 95%              | 0.95                 | 280*30*21mm        |
| FMS-150-700 N-S LD1 E      | 150W        | 220-240VAC            | 550-700mA              | 40-220V                | 95%              | 0.95                 | 280*30*21mm        |
| FMS-150-700 N-S CCT LD EXC | 150W        | 220-240VAC            | 550-700mA              | 40-220V                | 95%              | 0.95                 | 280*30*21mm        |

线性 - 隔离智能系列

DALI-2+0-10V

- 可适配I/ II类灯具
- For luminaire of protection class I and II
- 隔离/内置式/独立式（带侧盖）
- Isolated/ SELV/ Built-in/ Independent (with side caps)
- 输入电压 120-277VAC
- Input voltage: 120-277VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 拨码调节输出电流
- Output current adjusted via DIP-switch
- 支持DALI-2、PUSH、0-10V、Rx、PWM调光
- Support DALI-2, PUSH, 0-10V, Rx, PWM dimming
- EOFi=15%
- EOFi=15%
- 适用于应急照明，符合EN 50172
- Suitable for emergency lighting acc. to EN 50172
- 5年质保
- 5 years warranty
- Ta, Tc: 60°C/ 85°C
- Ta, Tc: 60°C/ 85°C




| Model<br>型号                | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|----------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FMX-35-700 DALI-2 0-10 LD  | 35W         | 120-277VAC            | 150-700mA              | 9-54V                  | 90%              | 0.95                 | 280*30*21mm        |
| FMX-50-1050 DALI-2 0-10 LD | 50W         | 120-277VAC            | 300-1050mA             | 9-54V                  | 90%              | 0.95                 | 280*30*21mm        |
| FMX-85-1800 DALI-2 0-10 LD | 85W         | 120-277VAC            | 700-2100mA             | 9-54V                  | 90%              | 0.95                 | 360*30*21mm        |

线性 - 隔离智能系列

DALI-2+拨码

- 可适配I/ II类灯具
- For luminaire of protection class I and II
- 隔离/内置式/独立式（带侧盖）
- Isolated/ SELV/ Built-in/ Independent (with side caps)
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 支持DALI、PUSH调光，走廊模式
- DALI dimming, PUSH dimming, Corridor mode
- 含DALI-2协议251, 252及253
- DALI-2 Parts 251, 252, 253
- 调光范围：1%-100%
- Dimming range: 1%-100%
- 符合ZHAGA协议
- ZHAGA protocol
- 效率>90%; 功率因数>0.95
- Efficiency>90%; Power Factor>0.95
- 适用于应急照明，符合EN 50172
- Suitable for emergency lighting acc. to EN 50172
- 5年质保
- 5 years warranty
- Ta, Tc: 60°C/ 85°C
- Ta, Tc: 60°C/ 85°C
- LD款：拨码调节输出电流，共16个电流档位；LN款：NFC调节输出电流
- LD: Output current adjusted via DIP-switch, 16 current steps; LN: Output current adjusted via NFC

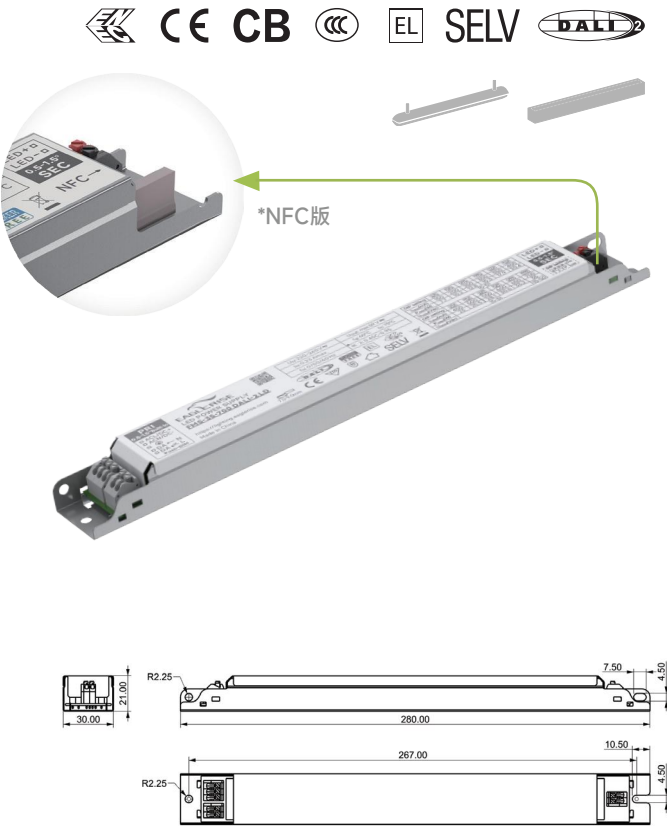


| Model<br>型号           | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|-----------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FMS-35-700 DALI-2 LD  | 35W         | 220-240VAC            | 100-700mA              | 15-51V                 | 90%              | 0.95                 | 280*30*21mm        |
| FMS-35-700 DALI-2 LN  | 35W         | 220-240VAC            | 150-700mA              | 15-51V                 | 90%              | 0.95                 | 280*30*21mm        |
| FMS-50-1050 DALI-2 LD | 50W         | 220-240VAC            | 350-1050mA             | 15-51V                 | 90%              | 0.95                 | 280*30*21mm        |
| FMS-50-1050 DALI-2 LN | 50W         | 220-240VAC            | 350-1050mA             | 15-51V                 | 90%              | 0.95                 | 280*30*21mm        |
| FMS-75-1800 DALI-2 LD | 75W         | 220-240VAC            | 1050-1800mA            | 15-51V                 | 90%              | 0.95                 | 280*30*21mm        |
| FMS-75-1800 DALI-2 LN | 75W         | 220-240VAC            | 1050-1800mA            | 15-51V                 | 90%              | 0.95                 | 280*30*21mm        |

线性 - 隔离系列

ON/OFF (拨码)

- 可适配I/ II类灯具
- For luminaire of protection class I and II
- 隔离/内置式/独立式（带侧盖）
- Isolated/ SELV/ Built-in/ Independent (with side caps)
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 拨码调节输出电流，共4个电流档
- Output current adjusted via DIP-switch, 4 current steps
- 效率>91%；功率因数>0.95
- Efficiency>91%; Power Factor>0.95
- 适用于应急照明，符合EN 50172
- Suitable for emergency lighting acc. to EN 50172
- 5年质保
- 5 years warranty
- Ta, Tc: 60°C/ 80°C
- Ta, Tc: 60°C/ 80°C

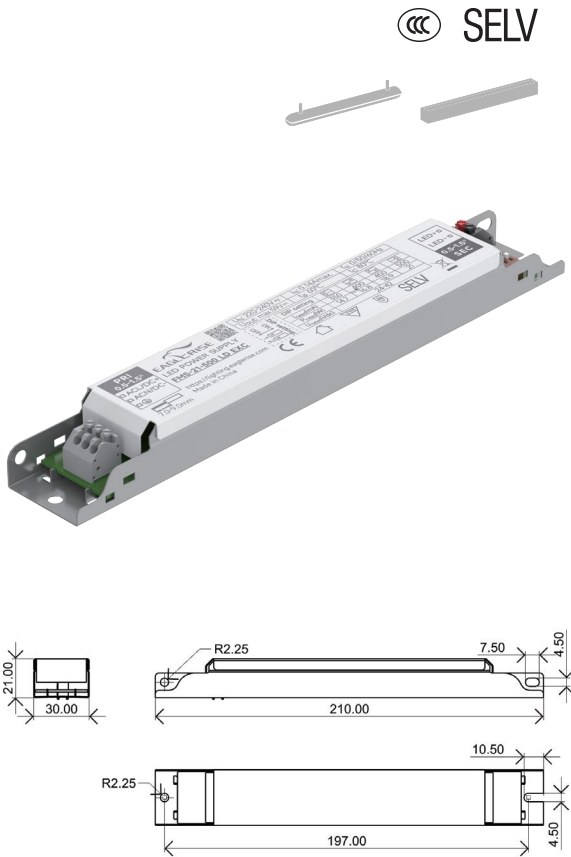


| Model<br>型号         | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|---------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FMS-21-500 LD EXC   | 21W         | 220-240VAC            | 350-500mA              | 24-42V                 | 88%              | 0.95                 | 210*30*21mm        |
| FMS-30-750 LD EXC   | 30W         | 220-240VAC            | 600-750mA              | 24-42V                 | 90%              | 0.95                 | 210*30*21mm        |
| FMS-42-1050 LD EXC  | 42W         | 220-240VAC            | 700-1050mA             | 24-42V                 | 90%              | 0.95                 | 210*30*21mm        |
| FMS-60-1500 LD1 EXC | 60W         | 220-240VAC            | 1150-1500mA            | 24-42V                 | 90%              | 0.95                 | 280*30*21mm        |
| FMS-80-2000 LD1 EXC | 80W         | 220-240VAC            | 1500-2000mA            | 24-42V                 | 91%              | 0.95                 | 280*30*21mm        |

线性 - 隔离系列

ON/OFF (拨码)


- 可适配I/ II类灯具
- For luminaire of protection class I and II
- 隔离/内置式/独立式（带侧盖）
- Isolated/ SELV/ Built-in/ Independent (with side caps)
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 拨码调节输出电流，共4个电流档
- Output current adjusted via DIP-switch, 4 current steps
- 效率>91%；功率因数>0.95
- Efficiency>91%; Power Factor>0.95
- 适用于应急照明，符合EN 50172
- Suitable for emergency lighting acc. to EN 50172
- 5年质保
- 5 years warranty
- Ta, Tc: 60°C/ 80°C
- Ta, Tc: 60°C/ 80°C

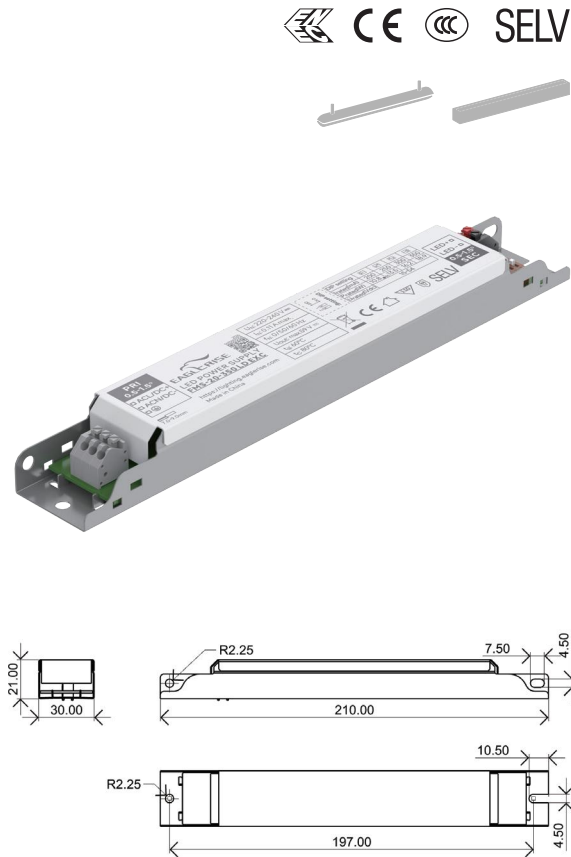

| Model<br>型号        | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|--------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FMS-20-350 LD EXC  | 20W         | 220-240VAC            | 200-350mA              | 15-51V                 | 88%              | 0.95                 | 210*30*21mm        |
| FMS-24-500 LD EXC  | 24W         | 220-240VAC            | 350-500mA              | 15-51V                 | 88%              | 0.95                 | 210*30*21mm        |
| FMS-35-650 LD EXC  | 35W         | 220-240VAC            | 500-650mA              | 15-51V                 | 90%              | 0.95                 | 210*30*21mm        |
| FMS-40-1050 LD EXC | 40W         | 220-240VAC            | 700-1050mA             | 15-51V                 | 90%              | 0.95                 | 210*30*21mm        |
| FMS-60-1200 LD EXC | 60W         | 220-240VAC            | 850-1200mA             | 15-51V                 | 91%              | 0.95                 | 280*30*21mm        |
| FMS-60-1500 LD EXC | 60W         | 220-240VAC            | 1150-1500mA            | 15-51V                 | 90%              | 0.95                 | 280*30*21mm        |
| FMS-75-1500 LD EXC | 75W         | 220-240VAC            | 1150-1500mA            | 15-51V                 | 90%              | 0.95                 | 280*30*21mm        |
| FMS-80-2000 LD EXC | 80W         | 220-240VAC            | 1300-2000mA            | 15-51V                 | 91%              | 0.95                 | 280*30*21mm        |

线性 - 隔离系列  
ON/OFF (拨码)

- 可适配I/ II类灯具
- For luminaire of protection class I and II
- 隔离/内置式/独立式（带侧盖）
- Isolated/ SELV/ Built-in/ Independent (with side caps)
- 输入电压 120-277VAC
- Input voltage: 120-277VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 拨码调节输出电流
- Output current adjusted via DIP-switch
- 效率：90%；功率因数：0.95
- Efficiency: 90%; Power Factor: 0.95
- 适用于应急照明，符合EN 50172
- Suitable for emergency lighting acc. to EN 50172
- EOFi=15%
- EOFi=15%
- 5年质保
- 5 years warranty
- Ta, Tc: 60°C/ 80°C
- Ta, Tc: 60°C/ 80°C

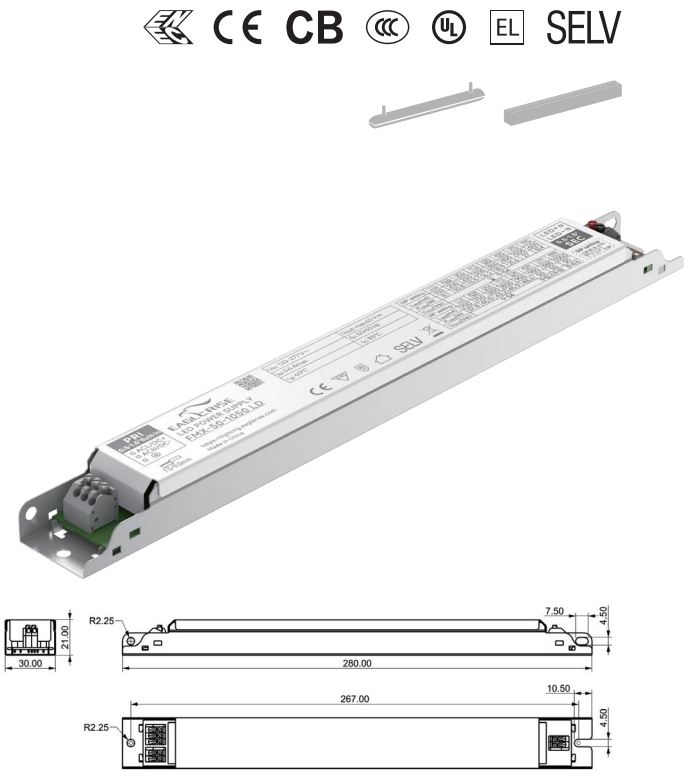

| Model<br>型号    | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|----------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FMX-50-1050 LD | 50W         | 120-277VAC            | 300-1050mA             | 9-54V                  | 90%              | 0.95                 | 280*30*21mm        |
| FMX-85-2100 LD | 85W         | 120-277VAC            | 700-2100mA             | 9-54V                  | 90%              | 0.95                 | 280*30*21mm        |

紧凑  
系列


LED DRIVER  
COMPACT SERIES

应用场景：  
吸顶灯  
面板灯  
筒灯及射灯

紧凑型 - 智能系列

DALI-2

- 可适配II类灯具
- For luminaire of protection class II
- 隔离/安全低电压/独立式
- Isolated/ SELV/ Independent
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 含DALI-2协议251, 252及253
- DALI-2 Parts 251、252、253
- 支持DALI-2、PUSH调光
- Support DALI-2, PUSH dimming
- 功率因数>0.95
- Power Factor> 0.95
- 效率>85%
- Efficiency> 85%
- 5年质保
- 5 years warranty
- Ta, Tc: 45°C/ 80°C
- Ta, Tc: 45°C/ 80°C

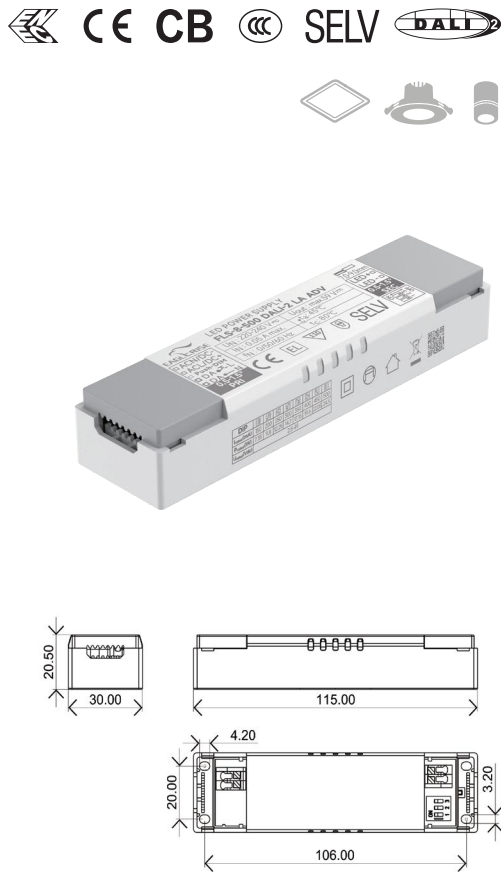


| Model<br>型号              | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|--------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FLS-8-500 DALI-2 LA ADV  | 8W          | 220-240VAC            | 150-500mA              | 2.5-49V                | 84%              | 0.95                 | 115*30*20.5mm      |
| FLS-12-700 DALI-2 LA ADV | 12W         | 220-240VAC            | 500-700mA              | 2.5-24V                | 84%              | 0.95                 | 115*30*20.5mm      |
| FLS-16-450 DALI-2 LA ADV | 16W         | 220-240VAC            | 100-450mA              | 2.5-42V                | 85%              | 0.95                 | 115*30*20.5mm      |

紧凑型 - 智能系列

0-10V

- 可适配II类灯具
- For luminaire of protection class II
- 隔离/安全低电压/独立式
- Isolated/ SELV/ Independent
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 支持0-10V、Rx、PWM调光
- Support 0-10V, Rx, PWM dimming
- 功率因数>0.95
- Power Factor> 0.95
- 效率>83%
- Efficiency> 83%
- 5年质保
- 5 years warranty
- Ta, Tc: 45°C/ 75°C
- Ta, Tc: 45°C/ 75°C

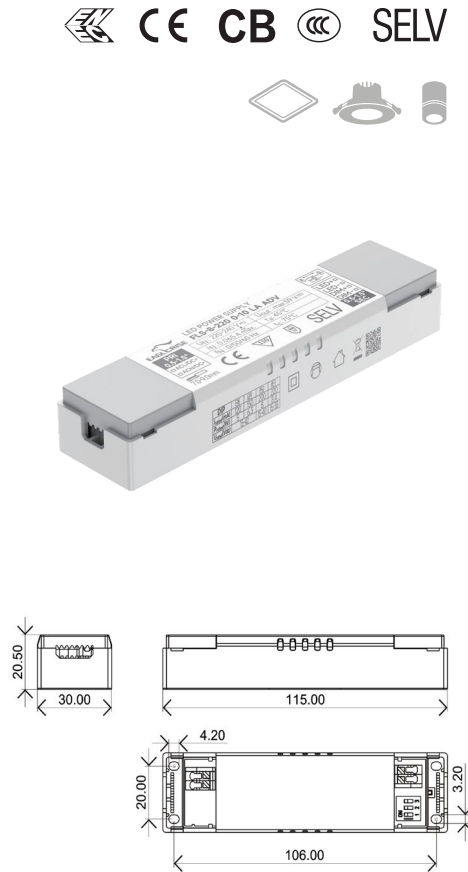


| Model<br>型号            | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FLS-8-220 0-10 LA ADV  | 8W          | 220-240VAC            | 120-220mA              | 15-42V                 | 83%              | 0.95                 | 115*30*20.5mm      |
| FLS-12-330 0-10 LA ADV | 12W         | 220-240VAC            | 250-330mA              | 15-42V                 | 84%              | 0.95                 | 115*30*20.5mm      |
| FLS-12-350 0-10 LA ADV | 12W         | 220-240VAC            | 120-350mA              | 15-42V                 | 84%              | 0.95                 | 115*30*20.5mm      |

紧凑型 - 智能系列

可控硅

- 可适配II类灯具
- For luminaire of protection class II
- 隔离/安全低电压/独立式
- Isolated/ SELV/ Independent
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 功率因数>0.95
- Power Factor> 0.95
- 效率>80%
- Efficiency> 80%
- 5年质保
- 5 years warranty
- 兼容前后切调光系统
- Dimmable via leading edge and trailing edge phase dimmers
- Ta, Tc: 50°C/ 85°C
- Ta, Tc: 50°C/ 85°C



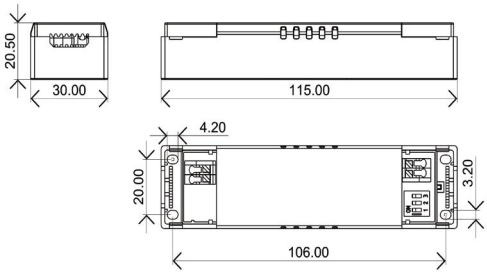


| Model<br>型号            | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| LS-8-120 TRIAC LI EXC  | 8W          | 220-240VAC            | 120mA                  | 27-40V                 | 75%              | 0.9                  | 115*30*20.5mm      |
| LS-8-200 TRIAC LI EXC  | 8W          | 220-240VAC            | 200mA                  | 27-40V                 | 80%              | 0.9                  | 115*30*20.5mm      |
| LS-8-220 TRIAC LI EXC  | 8W          | 220-240VAC            | 220mA                  | 27-40V                 | 83%              | 0.9                  | 115*30*20.5mm      |
| LS-12-250 TRIAC LI EXC | 12W         | 220-240VAC            | 250mA                  | 27-40V                 | 83%              | 0.95                 | 115*30*20.5mm      |
| LS-12-300 TRIAC LI EXC | 12W         | 220-240VAC            | 300mA                  | 27-40V                 | 83%              | 0.95                 | 115*30*20.5mm      |
| LS-12-350 TRIAC LI EXC | 12W         | 220-240VAC            | 350mA                  | 27-40V                 | 83%              | 0.95                 | 115*30*20.5mm      |

紧凑型 - 智能系列

可控硅

- 可适配II类灯具
- For luminaire of protection class II
- 隔离/安全低电压/独立式
- Isolated/ SELV/ Independent
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 功率因数>0.95
- Power Factor> 0.95
- 效率>85%
- Efficiency> 85%
- 5年质保
- 5 years warranty
- 兼容前后切调光系统
- Dimmable via leading edge and trailing edge phase dimmers
- Ta, Tc: 60°C/ 90°C
- Ta, Tc: 60°C/ 90°C

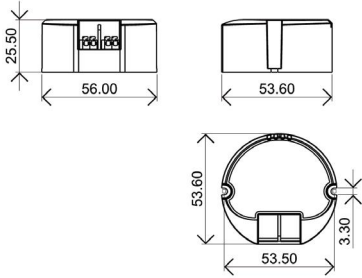



| Model<br>型号        | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|--------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| CS-8-100 TRIAC LI  | 8W          | 220-240VAC            | 100mA                  | 28-40V                 | 78%              | 0.90                 | Φ56*25.5mm         |
| CS-8-120 TRIAC LI  | 8W          | 220-240VAC            | 120mA                  | 28-40V                 | 80%              | 0.90                 | Φ56*25.5mm         |
| CS-8-150 TRIAC LI  | 8W          | 220-240VAC            | 150mA                  | 28-40V                 | 80%              | 0.95                 | Φ56*25.5mm         |
| CS-8-180 TRIAC LI  | 8W          | 220-240VAC            | 180mA                  | 28-40V                 | 80%              | 0.95                 | Φ56*25.5mm         |
| CS-8-200 TRIAC LI  | 8W          | 220-240VAC            | 200mA                  | 28-40V                 | 80%              | 0.95                 | Φ56*25.5mm         |
| CS-8-220 TRIAC LI  | 8W          | 220-240VAC            | 220mA                  | 28-40V                 | 80%              | 0.95                 | Φ56*25.5mm         |
| CS-15-250 TRIAC LI | 15W         | 220-240VAC            | 250mA                  | 28-40V                 | 82%              | 0.95                 | Φ65*25mm           |
| CS-15-280 TRIAC LI | 15W         | 220-240VAC            | 280mA                  | 28-40V                 | 82%              | 0.95                 | Φ65*25mm           |
| CS-15-300 TRIAC LI | 15W         | 220-240VAC            | 300mA                  | 28-40V                 | 82%              | 0.95                 | Φ65*25mm           |
| CS-15-350 TRIAC LI | 15W         | 220-240VAC            | 350mA                  | 28-40V                 | 82%              | 0.95                 | Φ65*25mm           |
| CS-22-XXX TRIAC LI | 22W         | 220-240VAC            | 400-550mA(every 50mA)  | 28-40V                 | 85%              | 0.95                 | Φ65*25mm           |
| CS-36-XXX TRIAC LI | 36W         | 220-240VAC            | 600-900mA(every 50mA)  | 28-40V                 | 85%              | 0.95                 | Φ75*26mm           |

紧凑型 - 智能系列

可控硅

- 可适配II类灯具
- For luminaire of protection class II
- 隔离/安全低电压/独立式
- Isolated/ SELV/ Independent
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 效率>80%；功率因数>0.95
- Efficiency> 80%; Power Factor> 0.95
- 兼容前后切调光系统
- Dimmable via leading edge and trailing edge phase dimmers
- 5年质保
- 5 years warranty
- Ta, Tc: 50°C/ 85°C
- Ta, Tc: 50°C/ 85°C

CE CB CCC SAA SELV

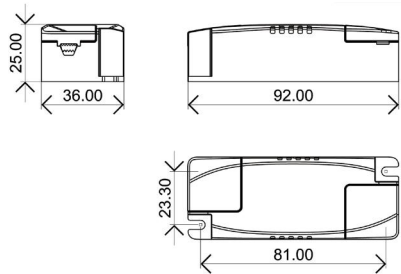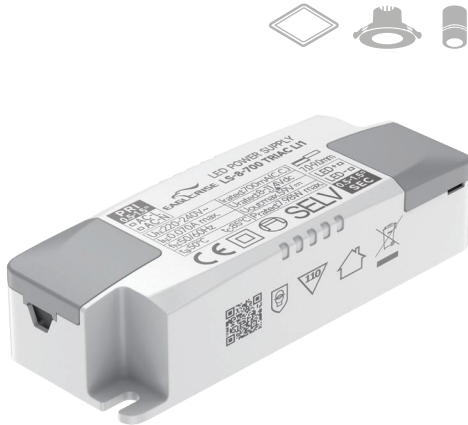



| Model<br>型号        | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|--------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| LS-8-100 TRIAC LI1 | 8W          | 220-240VAC            | 100mA                  | 28-40V                 | 78%              | 0.90                 | 92*36*25mm         |
| LS-8-120 TRIAC LI1 | 8W          | 220-240VAC            | 120mA                  | 28-40V                 | 80%              | 0.90                 | 92*36*25mm         |
| LS-8-150 TRIAC LI1 | 8W          | 220-240VAC            | 150mA                  | 28-40V                 | 80%              | 0.95                 | 92*36*25mm         |
| LS-8-180 TRIAC LI1 | 8W          | 220-240VAC            | 180mA                  | 28-40V                 | 80%              | 0.95                 | 92*36*25mm         |
| LS-8-200 TRIAC LI1 | 8W          | 220-240VAC            | 200mA                  | 28-40V                 | 80%              | 0.95                 | 92*36*25mm         |
| LS-8-220 TRIAC LI1 | 8W          | 220-240VAC            | 220mA                  | 28-40V                 | 80%              | 0.95                 | 92*36*25mm         |
| LS-8-250 TRIAC LI1 | 8W          | 220-240VAC            | 250mA                  | 18-24V                 | 80%              | 0.95                 | 92*36*25mm         |
| LS-8-300 TRIAC LI1 | 8W          | 220-240VAC            | 300mA                  | 18-24V                 | 80%              | 0.95                 | 92*36*25mm         |
| LS-8-350 TRIAC LI1 | 8W          | 220-240VAC            | 350mA                  | 18-24V                 | 80%              | 0.95                 | 92*36*25mm         |
| LS-8-700 TRIAC LI1 | 8W          | 220-240VAC            | 700mA                  | 8-11.4V                | 76%              | 0.95                 | 92*36*25mm         |

紧凑型 - 智能系列

可控硅

- 可适配II类灯具
- For luminaire of protection class II
- 隔离/安全低电压/独立式
- Isolated/ SELV/ Independent
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 效率>85%；功率因数>0.95
- Efficiency> 85%; Power Factor> 0.95
- 兼容前后切调光系统
- Dimmable via leading edge and trailing edge phase dimmers
- 5年质保
- 5 years warranty
- Ta, Tc: 50°C/ 85°C
- Ta, Tc: 50°C/ 85°C

CE CB CCC SELV

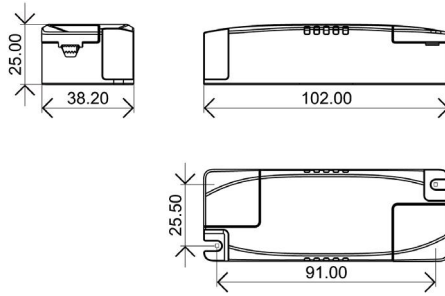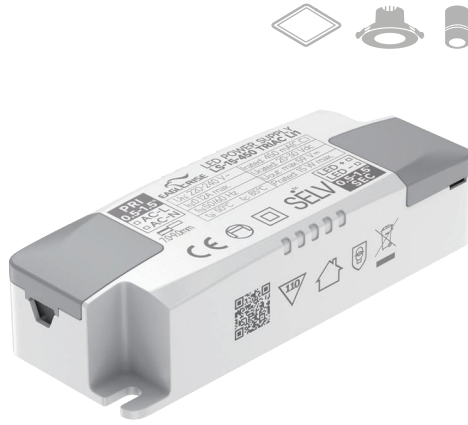


| Model<br>型号         | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|---------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| LS-15-XXX TRIAC LI1 | 15W         | 220-240VAC            | 250/280/300/350mA      | 28-40V                 | 82%              | 0.95                 | 102*38.2*25mm      |
| LS-15-400 TRIAC LI1 | 15W         | 220-240VAC            | 400mA                  | 25-38V                 | 82%              | 0.95                 | 102*38.2*25mm      |
| LS-15-450 TRIAC LI1 | 15W         | 220-240VAC            | 450mA                  | 22-33V                 | 82%              | 0.95                 | 102*38.2*25mm      |
| LS-15-500 TRIAC LI1 | 15W         | 220-240VAC            | 500mA                  | 20-30V                 | 82%              | 0.95                 | 102*38.2*25mm      |
| LS-15-550 TRIAC LI1 | 15W         | 220-240VAC            | 550mA                  | 17-27V                 | 82%              | 0.95                 | 102*38.2*25mm      |
| LS-15-600 TRIAC LI1 | 15W         | 220-240VAC            | 600mA                  | 16-25V                 | 82%              | 0.95                 | 102*38.2*25mm      |
| LS-15-650 TRIAC LI1 | 15W         | 220-240VAC            | 650mA                  | 16-23V                 | 82%              | 0.95                 | 102*38.2*25mm      |
| LS-15-700 TRIAC LI1 | 15W         | 220-240VAC            | 700mA                  | 14-22V                 | 82%              | 0.95                 | 102*38.2*25mm      |
| LS-20-300 TRIAC LI1 | 20W         | 220-240VAC            | 300mA                  | 50-68V                 | 85%              | 0.95                 | 102*38.2*25mm      |
| LS-20-350 TRIAC LI1 | 20W         | 220-240VAC            | 350mA                  | 40-60V                 | 85%              | 0.95                 | 102*38.2*25mm      |
| LS-20-XXX TRIAC LI1 | 20W         | 220-240VAC            | 400/450/500mA          | 28-40V                 | 85%              | 0.95                 | 102*38.2*25mm      |
| LS-20-550 TRIAC LI1 | 20W         | 220-240VAC            | 550mA                  | 28-38V                 | 85%              | 0.95                 | 102*38.2*25mm      |
| LS-20-600 TRIAC LI1 | 20W         | 220-240VAC            | 600mA                  | 22-34V                 | 85%              | 0.95                 | 102*38.2*25mm      |
| LS-20-XXX TRIAC LI1 | 20W         | 220-240VAC            | 650/700mA              | 20-30V                 | 85%              | 0.95                 | 102*38.2*25mm      |

紧凑型 - 智能系列

可控硅

- 可适配II类灯具
- For luminaire of protection class II
- 隔离/安全低电压/独立式
- Isolated/ SELV/ Independent
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 效率>87%；功率因数>0.95
- Efficiency> 87%; Power Factor> 0.95
- 兼容前后切调光系统
- Dimmable via leading edge and trailing edge phase dimmers
- 5年质保
- 5 years warranty
- Ta, Tc: 45C/ 85°C
- Ta, Tc: 45°C/ 85°C


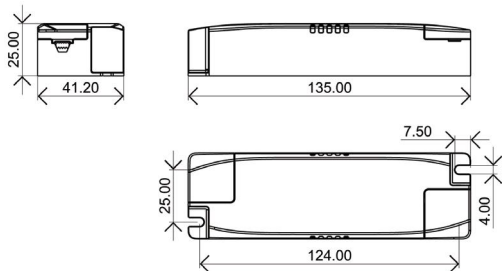


| Model<br>型号          | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|----------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| LS-30-600 TRIAC LI1  | 30W         | 220-240VAC            | 600mA                  | 35-50V                 | 86%              | 0.95                 | 135*41*25mm        |
| LS-30-650 TRIAC LI1  | 30W         | 220-240VAC            | 650mA                  | 30-45V                 | 86%              | 0.95                 | 135*41*25mm        |
| LS-30-700 TRIAC LI1  | 30W         | 220-240VAC            | 700mA                  | 28-42V                 | 86%              | 0.95                 | 135*41*25mm        |
| LS-30-750 TRIAC LI1  | 30W         | 220-240VAC            | 750mA                  | 28-40V                 | 86%              | 0.95                 | 135*41*25mm        |
| LS-30-800 TRIAC LI1  | 30W         | 220-240VAC            | 800mA                  | 28-40V                 | 86%              | 0.95                 | 135*41*25mm        |
| LS-30-850 TRIAC LI1  | 30W         | 220-240VAC            | 850mA                  | 24-37V                 | 86%              | 0.95                 | 135*41*25mm        |
| LS-30-900 TRIAC LI1  | 30W         | 220-240VAC            | 900mA                  | 22-34V                 | 86%              | 0.95                 | 135*41*25mm        |
| LS-40-700 TRIAC LI1  | 40W         | 220-240VAC            | 700mA                  | 36-54V                 | 87%              | 0.95                 | 135*41*25mm        |
| LS-40-750 TRIAC LI1  | 40W         | 220-240VAC            | 750mA                  | 35-53V                 | 87%              | 0.95                 | 135*41*25mm        |
| LS-40-800 TRIAC LI1  | 40W         | 220-240VAC            | 800mA                  | 33-50V                 | 87%              | 0.95                 | 135*41*25mm        |
| LS-40-850 TRIAC LI1  | 40W         | 220-240VAC            | 850mA                  | 31-47V                 | 87%              | 0.95                 | 135*41*25mm        |
| LS-40-900 TRIAC LI1  | 40W         | 220-240VAC            | 900mA                  | 27-42V                 | 87%              | 0.95                 | 135*41*25mm        |
| LS-40-950 TRIAC LI1  | 40W         | 220-240VAC            | 950mA                  | 28-40V                 | 87%              | 0.95                 | 135*41*25mm        |
| LS-40-1000 TRIAC LI1 | 40W         | 220-240VAC            | 1000mA                 | 28-40V                 | 87%              | 0.95                 | 135*41*25mm        |
| LS-40-1050 TRIAC LI1 | 40W         | 220-240VAC            | 1050mA                 | 28-40V                 | 87%              | 0.95                 | 135*41*25mm        |

紧凑型 - 智能系列

无线

- 可适配II类灯具
- For luminaire of protection class II
- 隔离/安全低电压/独立式
- Isolated/ SELV/ Independent
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：过载保护、过压保护、过温保护
- Protections: OLP/ OVP/ OTP
- 效率>85%；功率因数>0.95
- Efficiency> 85%; Power Factor> 0.95
- IP20
- IP20
- 5年质保
- 5 years warranty
- Ta, Tc: 50C/ 85°C
- Ta, Tc: 50°C/ 85°C

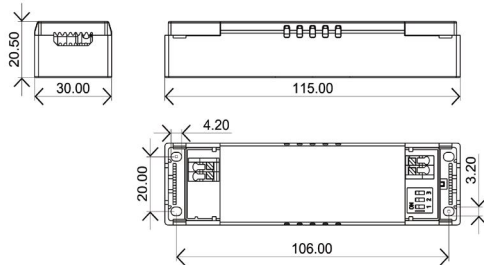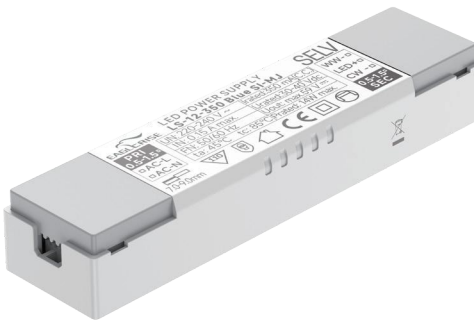



| Model<br>型号          | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|----------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| LS-8-100 Blue SI-MJ  | 8W          | 220-240VAC            | 100mA                  | 30-40V                 | 75%              | 0.5                  | 115*30*20.5mm      |
| LS-8-120 Blue SI-MJ  | 8W          | 220-240VAC            | 120mA                  | 30-40V                 | 75%              | 0.5                  | 115*30*20.5mm      |
| LS-8-160 Blue SI-MJ  | 8W          | 220-240VAC            | 160mA                  | 30-40V                 | 80%              | 0.5                  | 115*30*20.5mm      |
| LS-8-180 Blue SI-MJ  | 8W          | 220-240VAC            | 180mA                  | 30-40V                 | 80%              | 0.5                  | 115*30*20.5mm      |
| LS-8-200 Blue SI-MJ  | 8W          | 220-240VAC            | 200mA                  | 30-40V                 | 80%              | 0.5                  | 115*30*20.5mm      |
| LS-8-235 Blue SI-MJ  | 8W          | 220-240VAC            | 235mA                  | 30-40V                 | 80%              | 0.5                  | 115*30*20.5mm      |
| LS-12-250 Blue SI-MJ | 12W         | 220-240VAC            | 250mA                  | 30-40V                 | 84%              | 0.5                  | 115*30*20.5mm      |
| LS-12-280 Blue SI-MJ | 12W         | 220-240VAC            | 280mA                  | 30-40V                 | 84%              | 0.5                  | 115*30*20.5mm      |
| LS-12-300 Blue SI-MJ | 12W         | 220-240VAC            | 300mA                  | 30-40V                 | 84%              | 0.5                  | 115*30*20.5mm      |
| LS-12-350 Blue SI-MJ | 12W         | 220-240VAC            | 350mA                  | 30-40V                 | 85%              | 0.5                  | 115*30*20.5mm      |

紧凑型系列

高效 （拨码）

- 可适配II类灯具
- For luminaire of protection class II
- 隔离/安全低电压/独立式
- Isolated/ SELV/ Independent
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护
- Protections: SCP/ OLP/ OVP
- 效率>94%；功率因数>0.95
- Efficiency> 94%; Power Factor> 0.95
- 5年质保
- 5 years warranty
- Ta, Tc: 45C/ 80°C
- Ta, Tc: 45°C/ 80°C

CE CB SELV

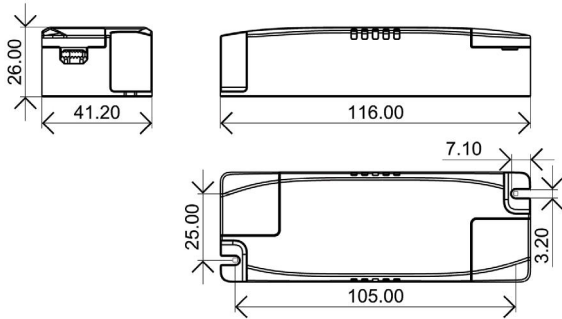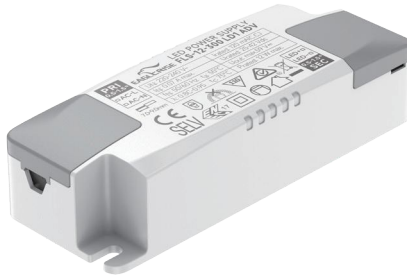



| Model<br>型号         | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|---------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FLS-15-350 LD1 ADV  | 15W         | 220-240VAC            | 200-350mA              | 28-40V                 | 92%              | 0.95                 | 116*41.2*26mm      |
| FLS-21-500 LD1 ADV  | 21W         | 220-240VAC            | 350-500mA              | 28-40V                 | 93%              | 0.95                 | 116*41.2*26mm      |
| FLS-30-750 LD1 ADV  | 30W         | 220-240VAC            | 600-750mA              | 28-40V                 | 94%              | 0.95                 | 116*41.2*26mm      |
| FLS-40-1050 LD1 ADV | 40W         | 220-240VAC            | 700-1050mA             | 28-40V                 | 94%              | 0.95                 | 116*41.2*26mm      |

紧凑型系列

细长

- 可适配II类灯具
- For luminaire of protection class II
- 隔离/安全低电压/独立式
- Isolated/ SELV/ Independent
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 效率>80%；功率因数>0.95
- Efficiency> 80%; Power Factor> 0.95
- 5年质保
- 5 years warranty
- IP20
- IP20
- Ta, Tc: 45C/ 85°C
- Ta, Tc: 45°C/ 85°C

CE CB SELV EL

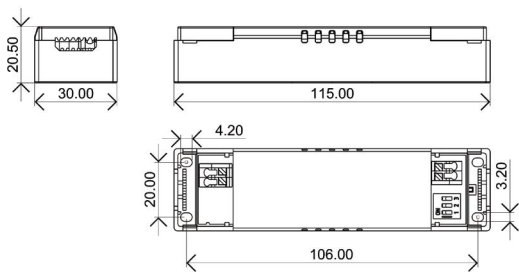
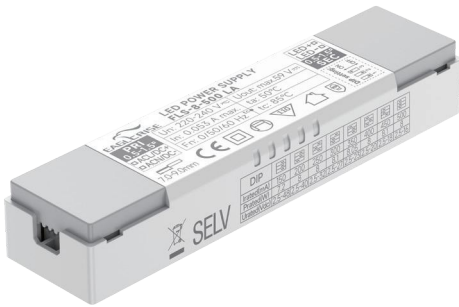


| Model<br>型号    | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|----------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FLS-8-500 LA   | 8W          | 220-240VAC            | 120mA                  | 30-42V                 | 80%              | 0.9                  | 115*30*20.5mm      |
| FLS-18-1050 LA | 8W          | 220-240VAC            | 160mA                  | 30-42V                 | 80%              | 0.9                  | 115*30*20.5mm      |

紧凑型系列

色温可调

- 可适配II类灯具
- For luminaire of protection class II
- 隔离/安全低电压/独立式
- Isolated/ SELV/ Independent
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 低功率因数，无频闪
- Low power factor and flicker-free
- 符合ErP2.0
- Compliant with ErP 2.0
- 色温通过拨码可调
- Flexible CCT setting via 3-way DIP-switch
- 可过35mm安装孔
- Suitable for 35mm hole
- 功率因数：0.6
- Power Factor: 0.6
- 5年质保
- 5 years warranty
- Ta, Tc: 45°C/ 75°C
- Ta, Tc: 45°C/ 75°C

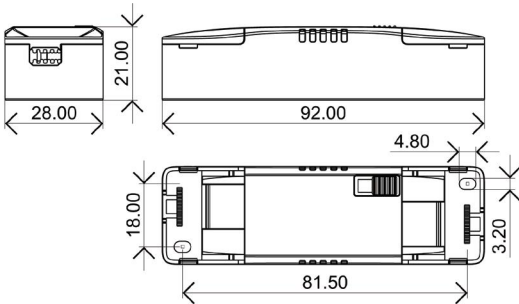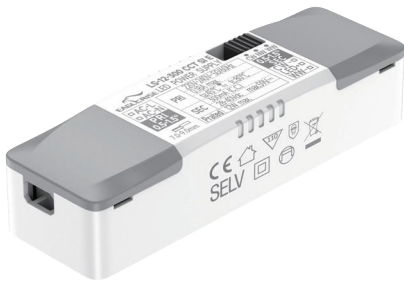


| Model<br>型号        | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|--------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| LS-8-70 CCT SI E   | 8W          | 220-240VAC            | 70mA                   | 30-40V                 | 78%              | 0.60                 | 92*28*21mm         |
| LS-8-80 CCT SI E   | 8W          | 220-240VAC            | 80mA                   | 30-40V                 | 78%              | 0.60                 | 92*28*21mm         |
| LS-8-120 CCT SI E  | 8W          | 220-240VAC            | 120mA                  | 30-40V                 | 80%              | 0.60                 | 92*28*21mm         |
| LS-8-150 CCT SI E  | 8W          | 220-240VAC            | 150mA                  | 30-40V                 | 80%              | 0.60                 | 92*28*21mm         |
| LS-8-160 CCT SI E  | 8W          | 220-240VAC            | 160mA                  | 30-40V                 | 80%              | 0.60                 | 92*28*21mm         |
| LS-8-180 CCT SI E  | 8W          | 220-240VAC            | 180mA                  | 30-40V                 | 80%              | 0.60                 | 92*28*21mm         |
| LS-8-200 CCT SI E  | 8W          | 220-240VAC            | 200mA                  | 30-40V                 | 80%              | 0.60                 | 92*28*21mm         |
| LS-8-220 CCT SI E  | 8W          | 220-240VAC            | 220mA                  | 30-40V                 | 80%              | 0.60                 | 92*28*21mm         |
| LS-12-250 CCT SI E | 12W         | 220-240VAC            | 250mA                  | 30-40V                 | 82%              | 0.60                 | 92*28*21mm         |
| LS-12-280 CCT SI E | 12W         | 220-240VAC            | 280mA                  | 30-40V                 | 82%              | 0.60                 | 92*28*21mm         |
| LS-12-300 CCT SI E | 12W         | 220-240VAC            | 300mA                  | 30-40V                 | 82%              | 0.60                 | 92*28*21mm         |
| LS-21-400 CCT SI E | 21W         | 220-240VAC            | 400mA                  | 30-42V                 | 85%              | 0.60                 | 92*36*25mm         |
| LS-21-450 CCT SI E | 21W         | 220-240VAC            | 450mA                  | 30-42V                 | 85%              | 0.60                 | 92*36*25mm         |
| LS-21-500 CCT SI E | 21W         | 220-240VAC            | 500mA                  | 30-42V                 | 85%              | 0.60                 | 92*36*25mm         |
| LS-21-600 CCT SI E | 21W         | 220-240VAC            | 600mA                  | 27-39V                 | 85%              | 0.60                 | 92*36*25mm         |

紧凑型系列

色温可调

- 可适配II类灯具
- For luminaire of protection class II
- 隔离/安全低电压/独立式
- Isolated/ SELV/ Independent
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 符合ErP2.0
- Compliant with ErP 2.0
- 色温通过拨码可调
- Flexible CCT setting via 3-way DIP-switch
- 功率因数：0.95
- Power Factor: 0.95
- 5年质保
- 5 years warranty
- Ta, Tc: 45°C/ 75°C
- Ta, Tc: 45°C/ 75°C


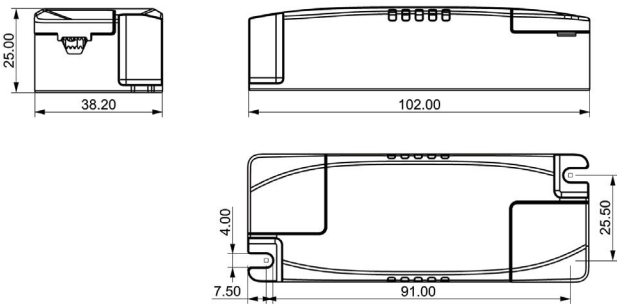


| Model<br>型号            | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| LS-30-500 CCT LI EXC   | 30W         | 220-240VAC            | 500mA                  | 24-42V                 | 87%              | 0.95                 | 102*38.2*25mm      |
| LS-30-550 CCT LI EXC   | 30W         | 220-240VAC            | 550mA                  | 24-42V                 | 87%              | 0.95                 | 102*38.2*25mm      |
| LS-30-600 CCT LI EXC   | 30W         | 220-240VAC            | 600mA                  | 24-42V                 | 87%              | 0.95                 | 102*38.2*25mm      |
| LS-30-650 CCT LI EXC   | 30W         | 220-240VAC            | 650mA                  | 24-42V                 | 87%              | 0.95                 | 102*38.2*25mm      |
| LS-30-700 CCT LI EXC   | 30W         | 220-240VAC            | 700mA                  | 24-42V                 | 87%              | 0.95                 | 102*38.2*25mm      |
| LS-30-750 CCT LI EXC   | 30W         | 220-240VAC            | 750mA                  | 24-42V                 | 87%              | 0.95                 | 102*38.2*25mm      |
| LS-30-800 CCT LI EXC   | 30W         | 220-240VAC            | 800mA                  | 24-42V                 | 87%              | 0.95                 | 102*38.2*25mm      |
| LS-40-850 CCT LI EX    | 40W         | 220-240VAC            | 850mA                  | 24-42V                 | 89%              | 0.95                 | 116*41.2*26mm      |
| LS-40-900 CCT LI EXC   | 40W         | 220-240VAC            | 900mA                  | 24-42V                 | 89%              | 0.95                 | 116*41.2*26mm      |
| LS-40-950 CCT LI EXC   | 40W         | 220-240VAC            | 950mA                  | 24-42V                 | 89%              | 0.95                 | 116*41.2*26mm      |
| LS-40-1000 CCT LI EXC  | 40W         | 220-240VAC            | 1000mA                 | 24-40V                 | 89%              | 0.95                 | 116*41.2*26mm      |
| LS-40-1050 CCT LI EXCC | 40W         | 220-240VAC            | 1050mA                 | 24-38.5V               | 89%              | 0.95                 | 116*41.2*26mm      |

紧凑型系列

热销

- 可适配II类灯具
- For luminaire of protection class II
- 隔离/安全低电压/独立式
- Isolated/ SELV/ Independent
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 低功率因素，无频闪
- Low power factor and flicker-free
- 符合ErP2.0
- Compliant with ErP 2.0
- 可过25mm安装孔
- Passes through 25mm holes
- 功率因数：0.5
- Power Factor: 0.5
- 5年质保
- 5 years warranty
- Ta, Tc: 45°C/ 75°C
- Ta, Tc: 45°C/ 75°C

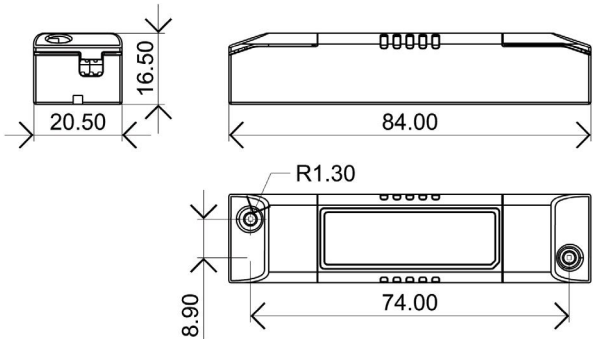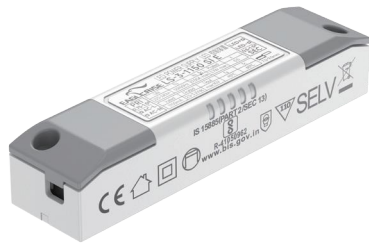


| Model<br>型号    | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|----------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| LS-3-XXX SI E  | 3W          | 220-240VAC            | 150-500mA(every 150mA) | 5-12V                  | 68%              | 0.45                 | 84*20.5*16.5mm     |
| LS-3-700 SI E  | 3W          | 220-240VAC            | 700mA                  | 2.5-4.5V               | 71%              | 0.45                 | 84*20.5*16.5mm     |
| LS-6-XXX SI E  | 6W          | 220-240VAC            | 120-180mA(every 30mA)  | 27-40V                 | 76%              | 0.50                 | 84*20.5*16.5mm     |
| LS-6-200 SI E  | 6W          | 220-240VAC            | 200mA                  | 27-40V                 | 76%              | 0.50                 | 84*20.5*16.5mm     |
| LS-6-220 SI E  | 6W          | 220-240VAC            | 220mA                  | 27-40V                 | 76%              | 0.50                 | 84*20.5*16.5mm     |
| LS-6-250 SI E  | 6W          | 220-240VAC            | 250mA                  | 10-24V                 | 76%              | 0.50                 | 84*20.5*16.5mm     |
| LS-6-XXX SI E  | 6W          | 220-240VAC            | 300-700mA(every 150mA) | 8-20V                  | 76%              | 0.50                 | 84*20.5*16.5mm     |
| LS-8-180 SI E1 | 8W          | 220-240VAC            | 180mA                  | 30-42V                 | 73%              | 0.50                 | 84*20.5*16.5mm     |
| LS-8-200 SI E1 | 8W          | 220-240VAC            | 200mA                  | 30-42V                 | 73%              | 0.50                 | 84*20.5*16.5mm     |
| LS-8-220 SI E1 | 8W          | 220-240VAC            | 220mA                  | 30-42V                 | 73%              | 0.50                 | 84*20.5*16.5mm     |
| LS-8-500 SI E1 | 8W          | 220-240VAC            | 500mA                  | 13-18V                 | 73%              | 0.50                 | 84*20.5*16.5mm     |
| LS-8-700 SI E1 | 8W          | 220-240VAC            | 700mA                  | 8-13V                  | 73%              | 0.50                 | 84*20.5*16.5mm     |

紧凑型系列

热销

- 可适配II类灯具
- For luminaire of protection class II
- 隔离/安全低电压/独立式
- Isolated/ SELV/ Independent
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 低功率因素，无频闪
- Low power factor and flicker-free
- 符合ErP2.0
- Compliant with ErP 2.0
- 可过35mm安装孔
- Passes through 35mm holes
- 功率因数：0.6
- Power Factor: 0.6
- 5年质保
- 5 years warranty
- Ta, Tc: 45°C/ 75°C
- Ta, Tc: 45°C/ 75°C

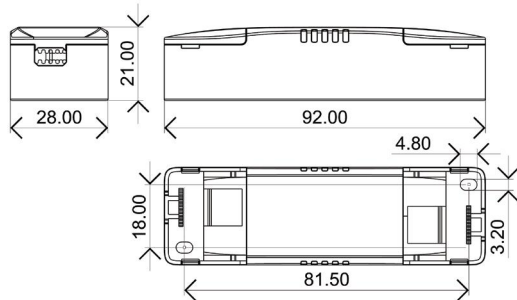


| Model<br>型号     | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|-----------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| LS-8-70 SI2 E   | 8W          | 220-240VAC            | 70mA                   | 30-40V                 | 78%              | 0.60                 | 92*28*21mm         |
| LS-8-XX SI2 E   | 8W          | 220-240VAC            | 80-120mA(every 20mA)   | 30-40V                 | 78%              | 0.60                 | 92*28*21mm         |
| LS-8-150 SI2 E  | 8W          | 220-240VAC            | 150mA                  | 30-40V                 | 80%              | 0.60                 | 92*28*21mm         |
| LS-8-XXX SI2 E  | 8W          | 220-240VAC            | 160-220mA(every 20mA)  | 30-40V                 | 80%              | 0.60                 | 92*28*21mm         |
| LS-8-300 SI2 E  | 8W          | 220-240VAC            | 300mA                  | 18-24V                 | 80%              | 0.60                 | 92*28*21mm         |
| LS-8-350 SI2 E  | 8W          | 220-240VAC            | 350mA                  | 18-24V                 | 80%              | 0.60                 | 92*28*21mm         |
| LS-8-500 SI2 E  | 8W          | 220-240VAC            | 500mA                  | 10-16V                 | 80%              | 0.60                 | 92*28*21mm         |
| LS-8-700 SI2 E  | 8W          | 220-240VAC            | 700mA                  | 8-11.4V                | 80%              | 0.60                 | 92*28*21mm         |
| LS-12-250 SI2 E | 12W         | 220-240VAC            | 250mA                  | 30-40V                 | 82%              | 0.60                 | 92*28*21mm         |
| LS-12-280 SI2 E | 12W         | 220-240VAC            | 280mA                  | 30-40V                 | 82%              | 0.60                 | 92*28*21mm         |
| LS-12-300 SI2 E | 12W         | 220-240VAC            | 300mA                  | 30-40V                 | 82%              | 0.60                 | 92*28*21mm         |
| LS-12-350 SI2 E | 12W         | 220-240VAC            | 350mA                  | 30-40V                 | 82%              | 0.60                 | 92*28*21mm         |
| LS-12-500 SI2 E | 12W         | 220-240VAC            | 500-700mA(every 100mA) | 18-24V                 | 82%              | 0.60                 | 92*28*21mm         |

紧凑型系列

热销

- 可适配II类灯具
- For luminaire of protection class II
- 隔离/安全低电压/独立式
- Isolated/ SELV/ Independent
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 可过45mm安装孔
- Passes through 45mm holes
- 效率>85%
- Efficiency>85%
- 功率因数：0.6
- Power Factor: 0.6
- 5年质保
- 5 years warranty
- Ta, Tc: 45°C/ 75°C
- Ta, Tc: 45°C/ 75°C


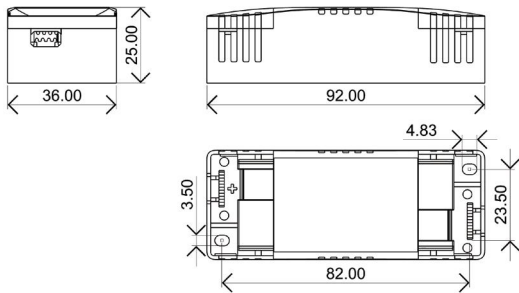


| Model<br>型号     | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|-----------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| LS-21-300 SI1 E | 21W         | 220-240VAC            | 300mA                  | 40-70V                 | 85%              | 0.60                 | 92*36*25mm         |
| LS-21-350 SI1 E | 21W         | 220-240VAC            | 350mA                  | 42-60V                 | 85%              | 0.60                 | 92*36*25mm         |
| LS-21-400 SI1 E | 21W         | 220-240VAC            | 400mA                  | 30-42V                 | 85%              | 0.60                 | 92*36*25mm         |
| LS-21-450 SI1 E | 21W         | 220-240VAC            | 450mA                  | 30-42V                 | 85%              | 0.60                 | 92*36*25mm         |
| LS-21-500 SI1 E | 21W         | 220-240VAC            | 500mA                  | 30-42V                 | 85%              | 0.60                 | 92*36*25mm         |
| LS-21-550 SI1 E | 21W         | 220-240VAC            | 550mA                  | 30-40V                 | 85%              | 0.60                 | 92*36*25mm         |
| LS-21-600 SI1 E | 21W         | 220-240VAC            | 600mA                  | 27-39V                 | 85%              | 0.60                 | 92*36*25mm         |
| LS-21-650 SI1 E | 21W         | 220-240VAC            | 650mA                  | 20-32V                 | 85%              | 0.60                 | 92*36*25mm         |
| LS-21-700 SI1 E | 21W         | 220-240VAC            | 700mA                  | 18-30V                 | 85%              | 0.60                 | 92*36*25mm         |

紧凑型系列

热销

- 可适配II类灯具
- For luminaire of protection class II
- 隔离/安全低电压/独立式
- Isolated/ SELV/ Independent
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 效率：68-79%
- Efficiency: 68-79%
- 功率因数：0.95
- Power Factor: 0.95
- 5年质保
- 5 years warranty
- Ta, Tc: 45°C/ 75°C
- Ta, Tc: 45°C/ 75°C

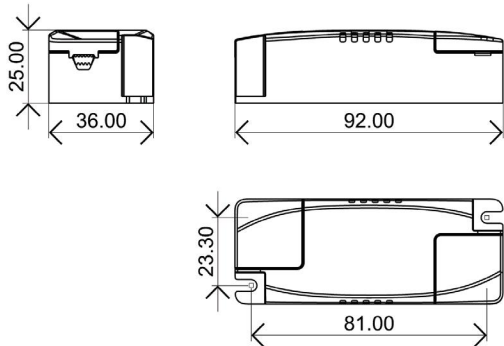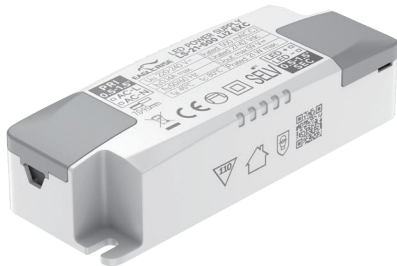

| Model<br>型号       | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|-------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| LS-8-70 LI2 EXC   | 8W          | 220-240VAC            | 70mA                   | 27-42V                 | 68%              | 0.9                  | 92*36*25mm         |
| LS-8-120 LI2 EXC  | 8W          | 220-240VAC            | 120mA                  | 27-42V                 | 75%              | 0.92                 | 92*36*25mm         |
| LS-8-150 LI2 EXC  | 8W          | 220-240VAC            | 150mA                  | 27-42V                 | 75%              | 0.95                 | 92*36*25mm         |
| LS-8-160 LI2 EXC  | 8W          | 220-240VAC            | 160mA                  | 27-42V                 | 75%              | 0.95                 | 92*36*25mm         |
| LS-8-180 LI2 EXC  | 8W          | 220-240VAC            | 180mA                  | 27-42V                 | 78%              | 0.95                 | 92*36*25mm         |
| LS-8-200 LI2 EXC  | 8W          | 220-240VAC            | 200mA                  | 27-42V                 | 78%              | 0.95                 | 92*36*25mm         |
| LS-8-220 LI2 EXC  | 8W          | 220-240VAC            | 220mA                  | 27-42V                 | 79%              | 0.95                 | 92*36*25mm         |
| LS-12-250 LI2 EXC | 12W         | 220-240VAC            | 250mA                  | 27-42V                 | 82%              | 0.95                 | 92*36*25mm         |
| LS-12-280 LI2 EXC | 12W         | 220-240VAC            | 280mA                  | 27-42V                 | 82%              | 0.95                 | 92*36*25mm         |
| LS-12-300 LI2 EXC | 12W         | 220-240VAC            | 300mA                  | 27-42V                 | 82%              | 0.95                 | 92*36*25mm         |
| LS-21-400 LI2 EXC | 21W         | 220-240VAC            | 400mA                  | 27-42V                 | 85%              | 0.95                 | 102*38.2*25mm      |
| LS-21-450 LI2 EXC | 21W         | 220-240VAC            | 450mA                  | 27-42V                 | 85%              | 0.95                 | 102*38.2*25mm      |
| LS-21-500 LI2 EXC | 21W         | 220-240VAC            | 500mA                  | 27-42V                 | 86%              | 0.95                 | 102*38.2*25mm      |

紧凑型系列

热销

- 可适配II类灯具

· For luminaire of protection class II
- 隔离/安全低电压/独立式

· Isolated/ SELV/ Independent
- 输入电压 220-240VAC

· Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护

· Protections: SCP/ OLP/ OVP
- 效率>89%


· Efficiency> 89%
- 功率因数：0.95

· Power Factor: 0.95
- IP20/40 （仅40W满足IP40）

· IP20/ 40 (IP40 only for 40W)
- 5年质保

· 5 years warranty
- Ta, Tc: 45°C/ 85°C (15W-21W); 45°C/ 88°C (40W)

· Ta, Tc: 45°C/ 85°C (15W-21W); 45°C/ 88°C (40W)

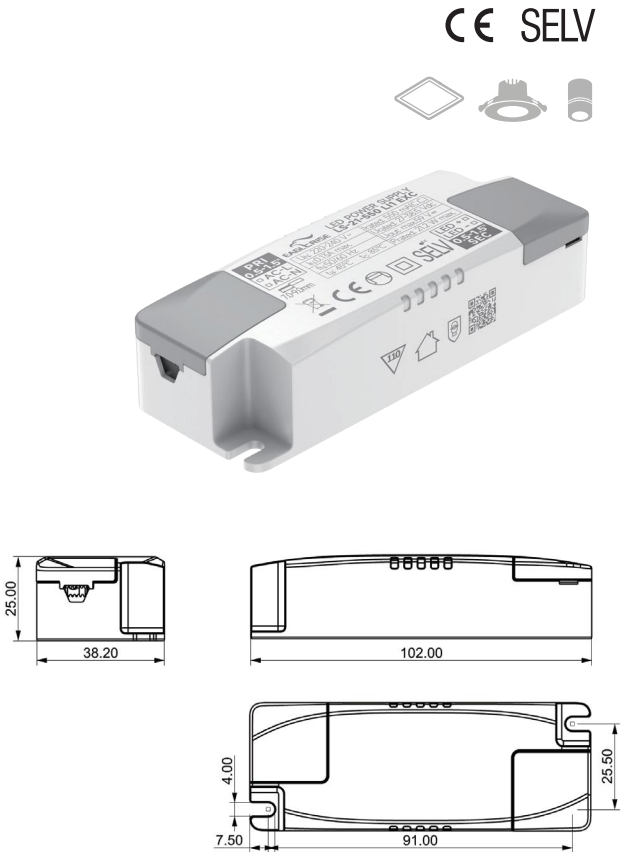

| Model<br>型号          | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|----------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| LS-15-350 LI1 EXC    | 15W         | 220-240VAC            | 350mA                  | 27-42V                 | 84%              | 0.95                 | 102*38.2*25mm      |
| LS-21-400 LI1 EXC    | 21W         | 220-240VAC            | 400mA                  | 27-42V                 | 85%              | 0.95                 | 102*38.2*25mm      |
| LS-21-450 LI1 EXC    | 21W         | 220-240VAC            | 450mA                  | 27-42V                 | 85%              | 0.95                 | 102*38.2*25mm      |
| LS-21-500 LI1 EXC    | 21W         | 220-240VAC            | 500mA                  | 27-42V                 | 86%              | 0.95                 | 102*38.2*25mm      |
| LS-21-550 LI1 EXC    | 21W         | 220-240VAC            | 550mA                  | 27-38.5V               | 86%              | 0.95                 | 102*38.2*25mm      |
| LS-40-600 LI1 EXC S  | 40W         | 220-240VAC            | 600mA                  | 24-42V                 | 87%              | 0.95                 | 102*38.2*25mm      |
| LS-40-650 LI1 EXC S  | 40W         | 220-240VAC            | 650mA                  | 24-42V                 | 87%              | 0.95                 | 102*38.2*25mm      |
| LS-40-700 LI1 EXC S  | 40W         | 220-240VAC            | 700mA                  | 24-42V                 | 87%              | 0.95                 | 102*38.2*25mm      |
| LS-40-750 LI1 EXC S  | 40W         | 220-240VAC            | 750mA                  | 24-42V                 | 87%              | 0.95                 | 102*38.2*25mm      |
| LS-40-800 LI1 EXC S  | 40W         | 220-240VAC            | 800mA                  | 24-42V                 | 87%              | 0.95                 | 102*38.2*25mm      |
| LS-40-850 LI1 EXC S  | 40W         | 220-240VAC            | 850mA                  | 24-42V                 | 87%              | 0.95                 | 102*38.2*25mm      |
| LS-40-900 LI1 EXC S  | 40W         | 220-240VAC            | 900mA                  | 24-42V                 | 89%              | 0.95                 | 102*38.2*25mm      |
| LS-40-950 LI1 EXC S  | 40W         | 220-240VAC            | 950mA                  | 24-42V                 | 89%              | 0.95                 | 102*38.2*25mm      |
| LS-40-1000 LI1 EXC S | 40W         | 220-240VAC            | 1000mA                 | 24-40V                 | 89%              | 0.95                 | 102*38.2*25mm      |
| LS-40-1050 LI1 EXC S | 40W         | 220-240VAC            | 1050mA                 | 24-38.5V               | 89%              | 0.95                 | 102*38.2*25mm      |

紧凑型系列

高PF

- 可适配II类灯具

· For luminaire of protection class II
- 隔离/安全低电压/独立式

· Isolated/ SELV/ Independent
- 输入电压 220-240VAC

· Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护


· Protections: SCP/ OLP/ OVP
- 效率>91%

· Efficiency> 91%
- 功率因数：0.95

· Power Factor: 0.95
- 5年质保

· 5 years warranty
- Ta, Tc: 45°C/ 80°C

· Ta, Tc: 45°C/ 80°C


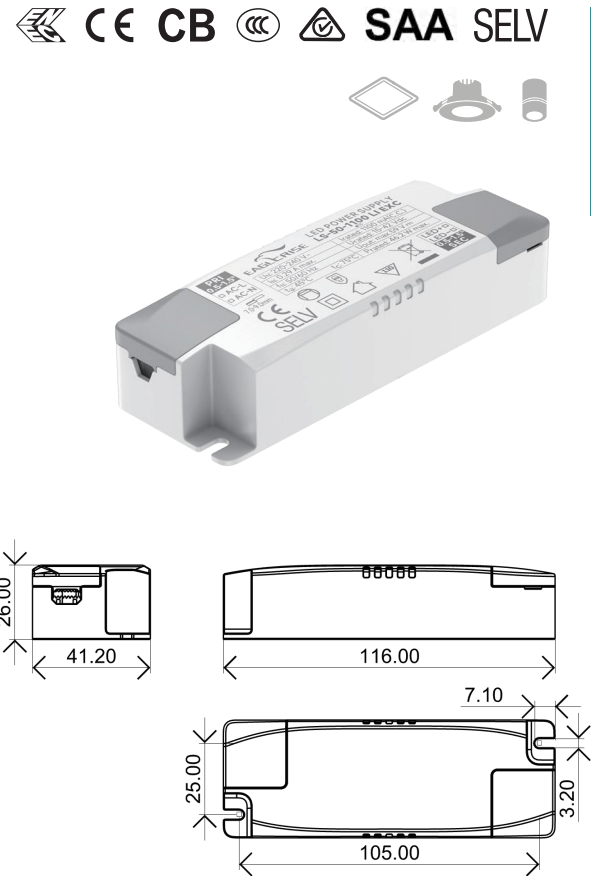


| Model<br>型号       | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|-------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| LS-50-500 LI EXC  | 50W         | 220-240VAC            | 500mA                  | 30-84V                 | 91%              | 0.95                 | 116*41.2*26mm      |
| LS-50-600 LI EXC  | 50W         | 220-240VAC            | 600mA                  | 30-84V                 | 91%              | 0.95                 | 116*41.2*26mm      |
| LS-50-1100 LI EXC | 50W         | 220-240VAC            | 1100mA                 | 15-42V                 | 91%              | 0.95                 | 116*41.2*26mm      |
| LS-50-1150 LI EXC | 50W         | 220-240VAC            | 1150mA                 | 15-42V                 | 91%              | 0.95                 | 116*41.2*26mm      |
| LS-50-1200 LI EXC | 50W         | 220-240VAC            | 1200mA                 | 15-42V                 | 91%              | 0.95                 | 116*41.2*26mm      |
| LS-50-1250 LI EXC | 50W         | 220-240VAC            | 1250mA                 | 15-40V                 | 91%              | 0.95                 | 116*41.2*26mm      |
| LS-60-1050 LI EXC | 60W         | 220-240VAC            | 1050mA                 | 15-42V                 | 90%              | 0.95                 | 135*41.2*25mm      |
| LS-60-1300 LI EXC | 60W         | 220-240VAC            | 1300mA                 | 15-42V                 | 90%              | 0.95                 | 135*41.2*25mm      |
| LS-60-1350 LI EXC | 60W         | 220-240VAC            | 1350mA                 | 15-42V                 | 90%              | 0.95                 | 135*41.2*25mm      |
| LS-60-1400 LI EXC | 60W         | 220-240VAC            | 1400mA                 | 15-42V                 | 90%              | 0.95                 | 135*41.2*25mm      |
| LS-60-1450 LI EXC | 60W         | 220-240VAC            | 1450mA                 | 15-40V                 | 90%              | 0.95                 | 135*41.2*25mm      |
| LS-60-1500 LI EXC | 60W         | 220-240VAC            | 1500mA                 | 15-40V                 | 90%              | 0.95                 | 135*41.2*25mm      |

紧凑型系列

宽电压

- 可适配II类灯具
- For luminaire of protection class II
- 隔离/安全低电压/内置式
- Isolated/ SELV/ Built-in
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 效率>85%
- Efficiency> 85%
- 功率因数：0.95
- Power Factor: 0.95
- 5年质保
- 5 years warranty
- Ta, Tc: 70°C/ 100°C
- Ta, Tc: 70°C/ 100°C

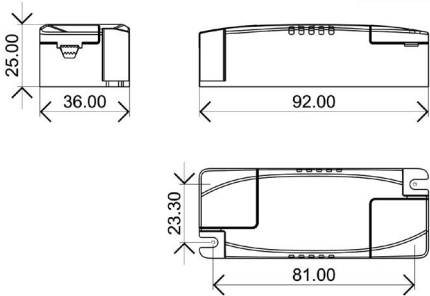
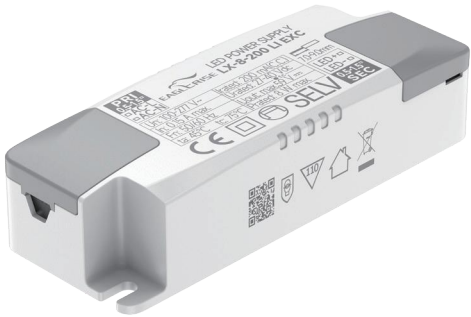


| Model<br>型号      | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| LX-8-70 LI EXC   | 8W          | 100-277VAC            | 70mA                   | 27-42V                 | 67%              | 0.9                  | 92*36*25mm         |
| LX-8-100 LI EXC  | 8W          | 100-277VAC            | 100mA                  | 27-42V                 | 67%              | 0.9                  | 92*36*25mm         |
| LX-8-120 LI EXC  | 8W          | 100-277VAC            | 120mA                  | 27-42V                 | 75%              | 0.92                 | 92*36*25mm         |
| LX-8-150 LI EXC  | 8W          | 100-277VAC            | 150mA                  | 27-42V                 | 77%              | 0.95                 | 92*36*25mm         |
| LX-8-160 LI EXC  | 8W          | 100-277VAC            | 160mA                  | 27-42V                 | 77%              | 0.95                 | 92*36*25mm         |
| LX-8-180 LI EXC  | 8W          | 100-277VAC            | 180mA                  | 27-42V                 | 78%              | 0.95                 | 92*36*25mm         |
| LX-8-200 LI EXC  | 8W          | 100-277VAC            | 200mA                  | 27-40V                 | 79%              | 0.95                 | 92*36*25mm         |
| LX-8-220 LI EXC  | 8W          | 100-277VAC            | 220mA                  | 27-40V                 | 79%              | 0.95                 | 92*36*25mm         |
| LX-12-250 LI EXC | 12W         | 100-277VAC            | 250mA                  | 27-42V                 | 78%              | 0.9                  | 92*36*25mm         |
| LX-12-280 LI EXC | 12W         | 100-277VAC            | 280mA                  | 27-42V                 | 78%              | 0.9                  | 92*36*25mm         |
| LX-12-300 LI EXC | 12W         | 100-277VAC            | 300mA                  | 27-40V                 | 78%              | 0.9                  | 92*36*25mm         |

紧凑型系列

宽电压

- 可适配II类灯具
- For luminaire of protection class II
- 隔离/安全低电压/内置式
- Isolated/ SELV/ Built-in
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 效率>88%
- Efficiency> 88%
- 功率因数：0.95
- Power Factor: 0.95
- 5年质保
- 5 years warranty
- Ta, Tc: 70°C/ 100°C
- Ta, Tc: 70°C/ 100°C

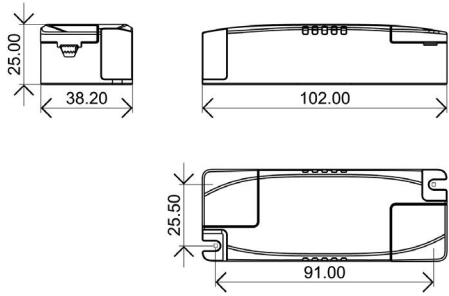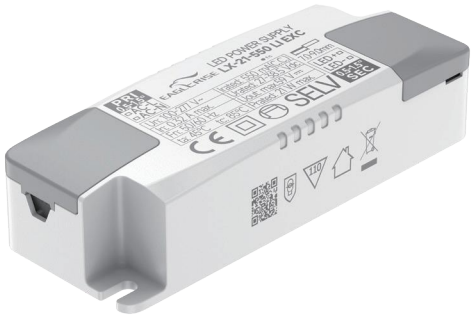


| Model<br>型号       | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|-------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| LX-21-350 LI EXC  | 21W         | 100-277VAC            | 350mA                  | 27-44V                 | 85%              | 0.95                 | 102*38.2*25mm      |
| LX-21-400 LI EXC  | 21W         | 100-277VAC            | 400mA                  | 27-44V                 | 85%              | 0.95                 | 102*38.2*25mm      |
| LX-21-450 LI EXC  | 21W         | 100-277VAC            | 450mA                  | 27-44V                 | 85%              | 0.95                 | 102*38.2*25mm      |
| LX-21-500 LI EXC  | 21W         | 100-277VAC            | 500mA                  | 27-44V                 | 85%              | 0.95                 | 102*38.2*25mm      |
| LX-21-550 LI EXC  | 21W         | 100-277VAC            | 550mA                  | 27-38.5V               | 85%              | 0.95                 | 102*38.2*25mm      |
| LX-40-600 LI EXC  | 40W         | 100-277VAC            | 600mA                  | 24-42V                 | 84%              | 0.9                  | 135*41.2*25mm      |
| LX-40-650 LI EXC  | 40W         | 100-277VAC            | 650mA                  | 24-42V                 | 84%              | 0.9                  | 135*41.2*25mm      |
| LX-40-700 LI EXC  | 40W         | 100-277VAC            | 700mA                  | 24-42V                 | 84%              | 0.9                  | 135*41.2*25mm      |
| LX-40-750 LI EXC  | 40W         | 100-277VAC            | 750mA                  | 24-42V                 | 84%              | 0.9                  | 135*41.2*25mm      |
| LX-40-800 LI EXC  | 40W         | 100-277VAC            | 500mA                  | 24-42V                 | 84%              | 0.9                  | 135*41.2*25mm      |
| LX-40-850 LI EXC  | 40W         | 100-277VAC            | 550mA                  | 24-42V                 | 84%              | 0.9                  | 135*41.2*25mm      |
| LX-40-900 LI EXC  | 40W         | 100-277VAC            | 600mA                  | 24-42V                 | 84%              | 0.9                  | 135*41.2*25mm      |
| LX-40-950 LI EXC  | 40W         | 100-277VAC            | 450mA                  | 24-42V                 | 84%              | 0.9                  | 135*41.2*25mm      |
| LX-40-1000 LI EXC | 40W         | 100-277VAC            | 500mA                  | 24-40V                 | 84%              | 0.9                  | 135*41.2*25mm      |
| LX-40-1050 LI EXC | 40W         | 100-277VAC            | 550mA                  | 24-38.5V               | 84%              | 0.9                  | 135*41.2*25mm      |

紧凑型系列

圆形

- 可适配II类灯具
- For luminaire of protection class II
- 隔离/安全低电压/内置式
- Isolated/ SELV/ Built-in
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 效率>85%
- Efficiency> 85%
- 功率因数：0.95
- Power Factor: 0.95
- 5年质保
- 5 years warranty
- Ta, Tc: 70°C/ 100°C
- Ta, Tc: 70°C/ 100°C

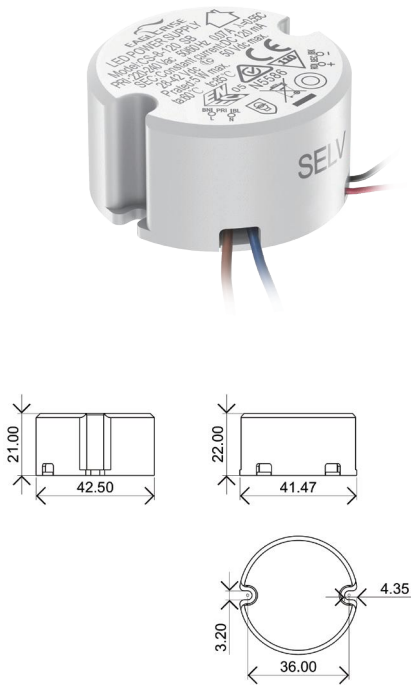


| Model<br>型号  | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|--------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| CS-8-100 SB  | 8W          | 220-240VAC            | 100mA                  | 30-40V                 | 80%              | 0.5                  | Φ42.5*21mm         |
| CS-8-120 SB  | 8W          | 220-240VAC            | 120mA                  | 30-40V                 | 80%              | 0.5                  | Φ42.5*21mm         |
| CS-8-150 SB  | 8W          | 220-240VAC            | 150mA                  | 30-40V                 | 80%              | 0.5                  | Φ42.5*21mm         |
| CS-8-180 SB  | 8W          | 220-240VAC            | 180mA                  | 30-40V                 | 80%              | 0.6                  | Φ42.5*21mm         |
| CS-8-200 SB  | 8W          | 220-240VAC            | 200mA                  | 30-40V                 | 80%              | 0.6                  | Φ42.5*21mm         |
| CS-8-220 SB  | 8W          | 220-240VAC            | 220mA                  | 30-40V                 | 80%              | 0.6                  | Φ42.5*21mm         |
| CS-15-250 SB | 15W         | 220-240VAC            | 250mA                  | 27-42V                 | 82%              | 0.6                  | Φ42.5*21mm         |
| CS-15-280 SB | 15W         | 220-240VAC            | 280mA                  | 27-42V                 | 82%              | 0.6                  | Φ42.5*21mm         |
| CS-15-300 SB | 15W         | 220-240VAC            | 300mA                  | 27-42V                 | 82%              | 0.6                  | Φ42.5*21mm         |
| CS-15-350 SB | 15W         | 220-240VAC            | 350mA                  | 27-42V                 | 82%              | 0.6                  | Φ42.5*21mm         |
| CS-15-400 SB | 15W         | 220-240VAC            | 400mA                  | 27-42V                 | 82%              | 0.6                  | Φ42.5*21mm         |

紧凑型系列

圆形

- 可适配II类灯具
- For luminaire of protection class II
- 隔离/安全低电压/内置式
- Isolated/ SELV/ Built-in
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 效率>85%
- Efficiency> 85%
- 功率因数：0.95
- Power Factor: 0.95
- 5年质保
- 5 years warranty
- Ta, Tc: 70°C/ 100°C
- Ta, Tc: 70°C/ 100°C

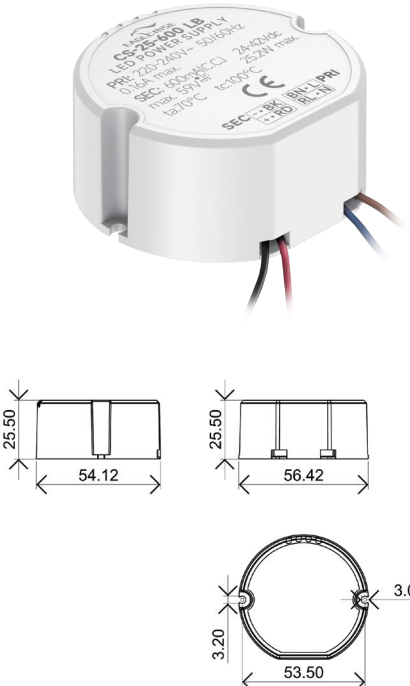


| Model<br>型号  | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|--------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| CS-25-450 LB | 25W         | 220-240VAC            | 450mA                  | 24-42V                 | 87%              | 0.95                 | Φ56*25.5mm         |
| CS-25-500 LB | 25W         | 220-240VAC            | 500mA                  | 24-42V                 | 87%              | 0.95                 | Φ56*25.5mm         |
| CS-25-550 LB | 25W         | 220-240VAC            | 550mA                  | 24-42V                 | 88%              | 0.95                 | Φ56*25.5mm         |
| CS-25-600 LB | 25W         | 220-240VAC            | 600mA                  | 24-42V                 | 88%              | 0.95                 | Φ56*25.5mm         |
| CS-32-650 LB | 32W         | 220-240VAC            | 650mA                  | 24-42V                 | 89%              | 0.95                 | Φ65*25mm           |
| CS-32-700 LB | 32W         | 220-240VAC            | 700mA                  | 24-42V                 | 89%              | 0.95                 | Φ65*25mm           |
| CS-32-750 LB | 32W         | 220-240VAC            | 750mA                  | 24-42V                 | 89%              | 0.95                 | Φ65*25mm           |
| CS-32-800 LB | 32W         | 220-240VAC            | 800mA                  | 24-42V                 | 89%              | 0.95                 | Φ65*25mm           |

紧凑型系列

圆形

- 可适配II类灯具
- For luminaire of protection class II
- 隔离/安全低电压/内置式
- Isolated/ SELV/ Built-in
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 效率>85%
- Efficiency> 85%
- 功率因数：0.5
- Power Factor: 0.5
- 5年质保
- 5 years warranty
- Ta, Tc: 70°C/ 100°C
- Ta, Tc: 70°C/ 100°C





| Model<br>型号  | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|--------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| CS-8-120 SI  | 8W          | 220-240VAC            | 120mA                  | 30-40V                 | 80%              | 0.50                 | Φ42*21mm           |
| CS-8-150 SI  | 8W          | 220-240VAC            | 150mA                  | 30-40V                 | 80%              | 0.50                 | Φ42*21mm           |
| CS-8-180 SI  | 8W          | 220-240VAC            | 180mA                  | 30-40V                 | 80%              | 0.50                 | Φ42*21mm           |
| CS-8-200 SI  | 8W          | 220-240VAC            | 200mA                  | 30-40V                 | 80%              | 0.50                 | Φ42*21mm           |
| CS-15-250 SI | 15W         | 220-240VAC            | 250mA                  | 27-42V                 | 82%              | 0.50                 | Φ42*21mm           |
| CS-15-300 SI | 15W         | 220-240VAC            | 300mA                  | 27-42V                 | 82%              | 0.50                 | Φ42*21mm           |
| CS-15-350 SI | 15W         | 220-240VAC            | 350mA                  | 27-42V                 | 82%              | 0.50                 | Φ42*21mm           |
| CS-22-350 SI | 22W         | 220-240VAC            | 350mA                  | 27-42V                 | 85%              | 0.50                 | Φ50*22mm           |
| CS-22-400 SI | 22W         | 220-240VAC            | 400mA                  | 27-42V                 | 85%              | 0.50                 | Φ50*22mm           |
| CS-22-450 SI | 22W         | 220-240VAC            | 450mA                  | 27-42V                 | 85%              | 0.50                 | Φ50*22mm           |
| CS-22-500 SI | 22W         | 220-240VAC            | 500mA                  | 27-42V                 | 85%              | 0.50                 | Φ50*22mm           |
| CS-22-550 SI | 22W         | 220-240VAC            | 550mA                  | 27-40V                 | 85%              | 0.50                 | Φ50*22mm           |

紧凑型系列

圆形

- 可适配II类灯具
- For luminaire of protection class II
- 隔离/安全低电压/内置式
- Isolated/ SELV/ Built-in
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 效率>90%
- Efficiency> 90%
- 功率因数：0.95
- Power Factor: 0.95
- 5年质保
- 5 years warranty
- Ta, Tc: 70°C/ 100°C
- Ta, Tc: 70°C/ 100°C

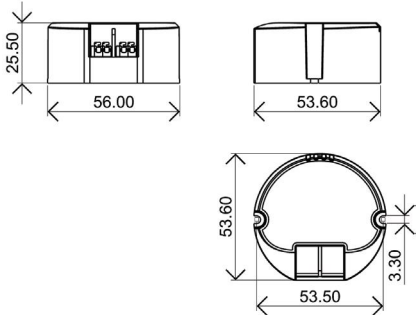


| Model<br>型号    | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|----------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| CS-24-450 LI1  | 24W         | 220-240VAC            | 450mA                  | 24-42V                 | 87%              | 0.95                 | Φ56*25.5mm         |
| CS-24-500 LI1  | 24W         | 220-240VAC            | 500mA                  | 24-42V                 | 87%              | 0.95                 | Φ56*25.5mm         |
| CS-24-550 LI1  | 24W         | 220-240VAC            | 550mA                  | 24-42V                 | 88%              | 0.95                 | Φ56*25.5mm         |
| CS-24-600 LI1  | 24W         | 220-240VAC            | 600mA                  | 24-40V                 | 88%              | 0.95                 | Φ56*25.5mm         |
| CS-30-600 LI1  | 30W         | 220-240VAC            | 600mA                  | 20-42V                 | 89%              | 0.95                 | Φ65*25mm           |
| CS-30-650 LI1  | 30W         | 220-240VAC            | 650mA                  | 20-42V                 | 89%              | 0.95                 | Φ65*25mm           |
| CS-30-700 LI1  | 30W         | 220-240VAC            | 700mA                  | 20-42V                 | 89%              | 0.95                 | Φ65*25mm           |
| CS-30-750 LI1  | 30W         | 220-240VAC            | 750mA                  | 24-40V                 | 89%              | 0.95                 | Φ65*25mm           |
| CS-42-800 LI1  | 42W         | 220-240VAC            | 800mA                  | 24-42V                 | 90%              | 0.95                 | Φ65*25mm           |
| CS-42-850 LI1  | 42W         | 220-240VAC            | 850mA                  | 24-42V                 | 90%              | 0.95                 | Φ65*25mm           |
| CS-42-900 LI1  | 42W         | 220-240VAC            | 900mA                  | 24-42V                 | 90%              | 0.95                 | Φ65*25mm           |
| CS-42-950 LI1  | 42W         | 220-240VAC            | 950mA                  | 24-42V                 | 90%              | 0.95                 | Φ65*25mm           |
| CS-42-1000 LI1 | 42W         | 220-240VAC            | 1000mA                 | 24-42V                 | 90%              | 0.95                 | Φ65*25mm           |
| CS-42-1050 LI1 | 42W         | 220-240VAC            | 1050mA                 | 24-40V                 | 90%              | 0.95                 | Φ65*25mm           |

紧凑型系列

带引线

- 可适配II类灯具
- For luminaire of protection class II
- 隔离/安全低电压/内置式
- Isolated/ SELV/ Built-in
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- IP65
- IP65
- 效率>86%
- Efficiency> 86%
- 功率因数：0.95
- Power Factor: 0.95
- 5年质保
- 5 years warranty
- Ta, Tc: 45°C/ 75°C
- Ta, Tc: 45°C/ 75°C

| Model<br>型号        | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|--------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| CH-12-300 IP65 LB1 | 12W         | 100-240VAC            | 300mA                  | 24-40VDC               | ≥81%             | 0.95                 | Φ55*26mm           |
| CH-12-350 IP65 LB1 | 12W         | 100-240VAC            | 350mA                  | 20-35VDC               | ≥81%             | 0.95                 | Φ55*26mm           |
| CH-12-500 IP65 LB1 | 12W         | 100-240VAC            | 500mA                  | 14-24VDC               | ≥81%             | 0.95                 | Φ55*26mm           |
| CH-12-700 IP65 LB1 | 12W         | 100-240VAC            | 700mA                  | 10.5-17.5VDC           | ≥81%             | 0.95                 | Φ55*26mm           |
| CH-18-300 IP65 LB  | 18W         | 100-240VAC            | 300mA                  | 36-60VDC               | ≥86%             | 0.95                 | Φ55*26mm           |
| CH-18-350 IP65 LB  | 18W         | 100-240VAC            | 350mA                  | 31-52VDC               | ≥86%             | 0.95                 | Φ55*26mm           |
| CH-18-450 IP65 LB  | 18W         | 100-240VAC            | 450mA                  | 24-40VDC               | ≥86%             | 0.95                 | Φ55*26mm           |
| CH-18-700 IP65 LB  | 18W         | 100-240VAC            | 700mA                  | 15.5-26VDC             | ≥87%             | 0.95                 | Φ55*26mm           |
| CH-25-350 IP65 LB1 | 25W         | 100-240VAC            | 350mA                  | 43-72VDC               | ≥86%             | 0.95                 | Φ65*28mm           |
| CH-25-600 IP65 LB1 | 25W         | 100-240VAC            | 600mA                  | 25-42VDC               | ≥86%             | 0.95                 | Φ65*28mm           |
| CH-25-700 IP65 LB1 | 25W         | 100-240VAC            | 700mA                  | 21.5-36VDC             | ≥86%             | 0.95                 | Φ65*28mm           |

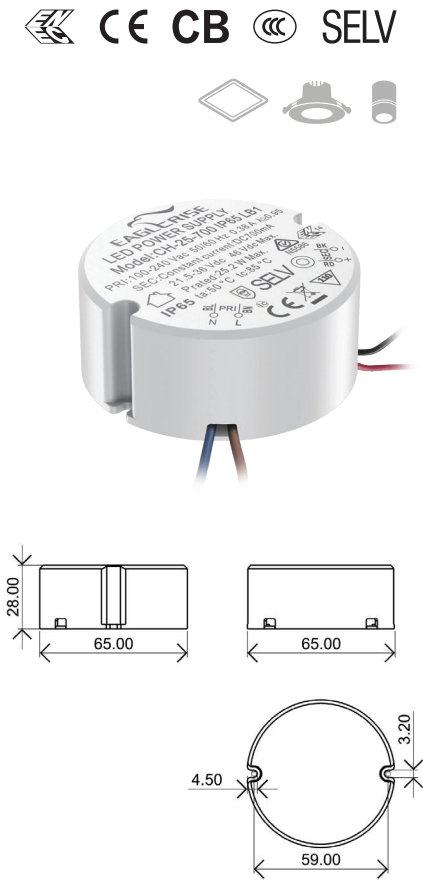


紧凑型系列

带引线


- 可适配I/ II类灯具
- For luminaire of protection class I and class II
- 隔离/安全低电压/内置式
- Isolated/ SELV/ Built-in
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护
- Protections: SCP/ OLP/ OVP
- 效率>81%
- Efficiency> 81%
- 功率因数：0.8
- Power Factor: 0.8
- 5年质保
- 5 years warranty
- Ta, Tc: 50°C/ 75°C
- Ta, Tc: 50°C/ 75°C

| Model<br>型号    | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|----------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| SS-6-300 MB    | 6W          | 220-240VAC            | 300mA                  | 10-20V                 | 76%              | 0.70                 | 58.1*28.5*21mm     |
| SS-6-350 MB    | 6W          | 220-240VAC            | 350mA                  | 8-20V                  | 76%              | 0.70                 | 58.1*28.5*21mm     |
| SS-6-700 MB    | 6W          | 220-240VAC            | 700mA                  | 2.8-9V                 | 76%              | 0.70                 | 58.1*28.5*21mm     |
| SS-9-200 MB-G  | 9W          | 220-240VAC            | 200mA                  | 27-45V                 | 78%              | 0.80                 | 60*34*23.5mm       |
| SS-9-350 MB-G  | 9W          | 220-240VAC            | 350mA                  | 15-26V                 | 78%              | 0.80                 | 60*34*23.5mm       |
| SS-9-700 MB-G  | 9W          | 220-240VAC            | 700mA                  | 7-13V                  | 78%              | 0.80                 | 60*34*23.5mm       |
| SS-12-300 MB-G | 12W         | 220-240VAC            | 300mA                  | 24-40V                 | 81%              | 0.80                 | 60*34*23.5mm       |
| SS-12-350 MB-G | 12W         | 220-240VAC            | 350mA                  | 20-34.5V               | 81%              | 0.80                 | 60*34*23.5mm       |
| SS-12-500 MB-G | 12W         | 220-240VAC            | 500mA                  | 14.5-24V               | 81%              | 0.80                 | 60*34*23.5mm       |
| SS-12-700 MB-G | 12W         | 220-240VAC            | 700mA                  | 10-18V                 | 81%              | 0.80                 | 60*34*23.5mm       |

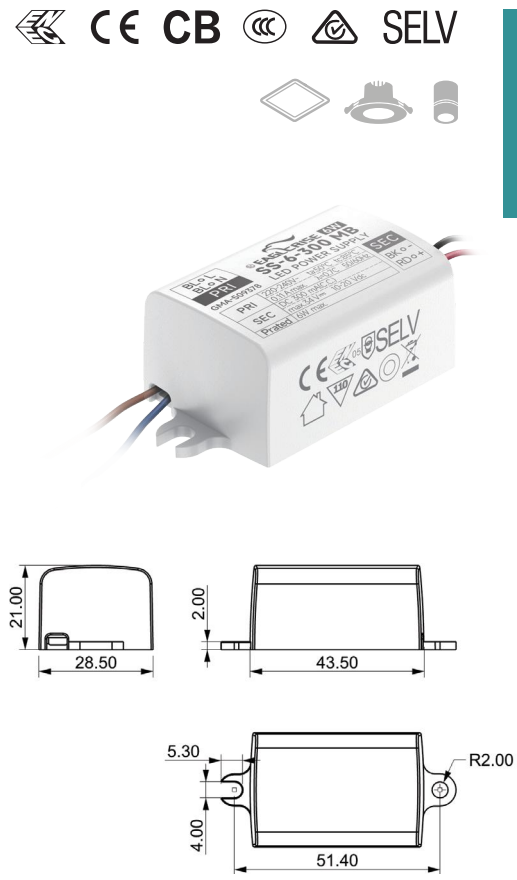

紧凑型系列  
带引线


- 可适配I/ II类灯具
- For luminaire of protection class I and class II
- 隔离/安全低电压/内置式
- Isolated/ SELV/ Built-in
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护
- Protections: SCP/ OLP/ OVP
- 效率>81%
- Efficiency> 81%
- 功率因数：0.7
- Power Factor: 0.7
- 5年质保
- 5 years warranty
- Ta, Tc: 50°C/ 75°C
- Ta, Tc: 50°C/ 75°C

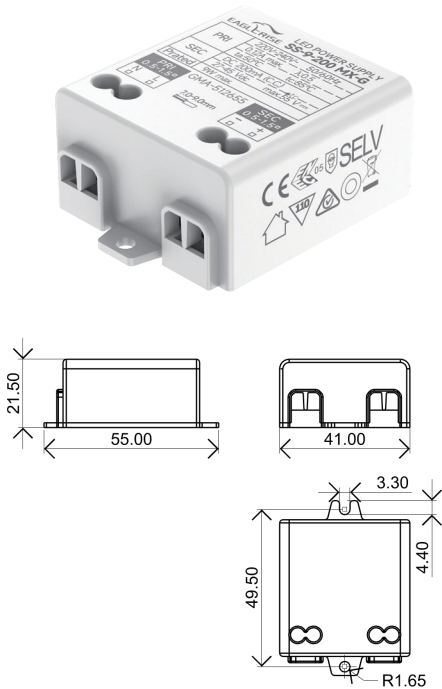

| Model<br>型号    | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|----------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| SS-9-200 MX-G  | 9W          | 220-240VAC            | 200mA                  | 27-45V                 | 81%              | 0.70                 | 55*41*21.5mm       |
| SS-9-300 MX-G  | 9W          | 220-240VAC            | 300mA                  | 18-30V                 | 81%              | 0.70                 | 55*41*21.5mm       |
| SS-9-350 MX-G  | 9W          | 220-240VAC            | 350mA                  | 15-26V                 | 81%              | 0.70                 | 55*41*21.5mm       |
| SS-9-700 MX-G  | 9W          | 220-240VAC            | 700mA                  | 7-13V                  | 81%              | 0.70                 | 55*41*21.5mm       |
| SS-12-300 MX-G | 12W         | 220-240VAC            | 300mA                  | 24-40V                 | 80%              | 0.70                 | 55*41*21.5mm       |
| SS-12-350 MX-G | 12W         | 220-240VAC            | 350mA                  | 20-34.5V               | 80%              | 0.70                 | 55*41*21.5mm       |
| SS-12-500 MX-G | 12W         | 220-240VAC            | 500mA                  | 14.5-24V               | 80%              | 0.70                 | 55*41*21.5mm       |
| SS-12-700 MX-G | 12W         | 220-240VAC            | 700mA                  | 10-18V                 | 80%              | 0.70                 | 55*41*21.5mm       |

紧凑型系列  
带引线

- 可适配II类灯具
- For luminaire of protection class II
- 隔离/安全低电压/内置式
- Isolated/ SELV/ Built-in
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护
- Protections: SCP/ OLP/ OVP
- 效率>68%
- Efficiency> 68%
- 功率因数：0.5
- Power Factor: 0.5
- 5年质保
- 5 years warranty
- Ta, Tc: 50°C/ 75°C
- Ta, Tc: 50°C/ 75°C

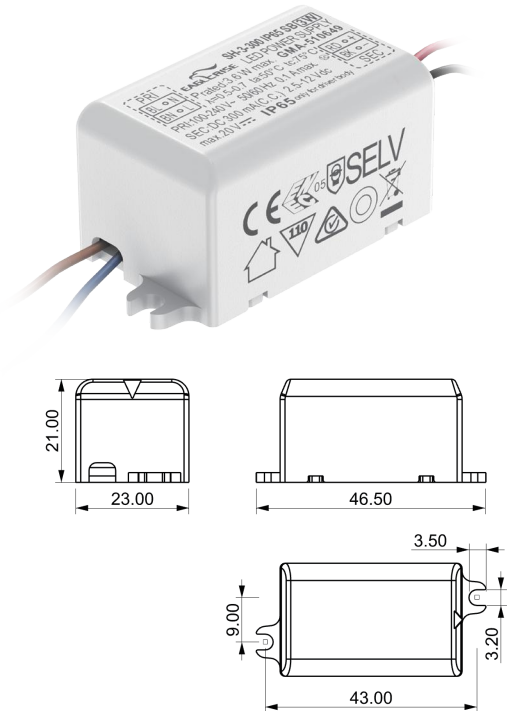

| Model<br>型号      | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| SH-3-300 IP65 SB | 3W          | 100-240VAC            | 300mA                  | 2.5-12V                | 68%              | 0.50                 | 47*23*21mm         |
| SH-3-350 IP65 SB | 3W          | 100-240VAC            | 350mA                  | 2.5-10V                | 68%              | 0.50                 | 47*23*21mm         |
| SH-3-500 IP65 SB | 3W          | 100-240VAC            | 500mA                  | 2.5-7V                 | 68%              | 0.50                 | 47*23*21mm         |
| SH-3-700 IP65 SB | 3W          | 100-240VAC            | 700mA                  | 2.5-4.5V               | 68%              | 0.50                 | 47*23*21mm         |

# 迷你系列




## LED DRIVER MINI SERIES

应用场景：  
吸顶灯  
面板灯  
筒灯及射灯

### 迷你型 - 智能系列 DALI-2 ( ALL IN ONE )



- 可适配I/ II类灯具  
· For luminaire of protection class I and class II
- 隔离/安全低电压/内置式/独立式（带侧盖）  
· Isolated/ SELV/ Built-in/ Independent(With side caps)
- 输入电压 220-240VAC  
· Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护  
· Protections: SCP/ OLP/ OVP/ OTP
- 支持DALI、0-10V、PUSH、电阻、PWM调光  
· Support DALI, 0-10V, PUSH, RX, PWM dimming
- 含DALI协议251、252、253  
· DALI-2 Parts 251, 252, 253
- 调光范围：1%-100%  
· Dimming range 1%-100%
- NFC调节输出电流  
· Output current adjusted via NFC
- 效率>89%; 功率因数>0.95  
· Efficiency>89%; Power factor>0.95
- 适用于应急照明，符合EN 50172  
· Suitable for emergency lighting acc. to EN 50172
- 5年质保  
· 5 years warranty
- Ta, Tc: 45°C/ 85°C  
· Ta, Tc: 45°C/ 85°C



| Model<br>型号                    | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|--------------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FLX-42-1050 DALI-2 0-10 LN PRO | 42W         | 100-240VAC            | 150-1050mA             | 2.5-49V                | 89%              | 0.95                 | 97*43*30mm         |



迷你型系列

迷你型 - 智能系列

DALI-2 DT8

- 可适配I/ II类灯具
  - For luminaire of protection class I and class II
- 隔离/安全低电压/内置式/独立式（带侧盖）
  - Isolated/ SELV/ Built-in/ Independent(With side caps)
- 输入电压 220-240VAC
  - Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
  - Protections: SCP/ OLP/ OVP/ OTP
- DALI调光、PUSH调光、走廊模式
  - DALI dimming, PUSH dimming, Corridor mode
- ADV版：DT8、DT6双模式；PRO版：仅DT8模式
  - ADV: can be used in both DT8 and DT6 mode; PRO: can be used in DT8 mode
- 含DALI协议251、252、253
  - DALI-2 Parts 251, 252, 253
- 调光范围：1%-100%
  - Dimming range 1%-100%
- NFC调节输出电流
  - Output current adjusted via NFC
- 效率>90%; 功率因数>0.95
  - Efficiency>90%; Power factor>0.95
- 适用于应急照明，符合EN 50172
  - Suitable for emergency lighting acc. to EN 50172
- 5年质保
  - 5 years warranty
- Ta, Tc: 45°C/ 85°C
  - Ta, Tc: 45°C/ 85°C

| Model<br>型号                   | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|-------------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FLS-20-500 DALI-2 DT8 LN ADV  | 20W         | 220-240VAC            | 150-500mA              | 2.5-49V                | 87%              | 0.95                 | 113*43*25mm        |
| FLS-42-1050 DALI-2 DT8 LN ADV | 42W         | 220-240VAC            | 300-1050mA             | 2.5-49V                | 90%              | 0.95                 | 113*43*25mm        |
| FLS-20-500 DALI-2 DT8 LN PRO  | 20W         | 220-240VAC            | 80-500mA               | 2.5-49V                | 87%              | 0.95                 | 113*43*25mm        |
| FLS-42-1050 DALI-2 DT8 LN PRO | 42W         | 220-240VAC            | 300-1050mA             | 2.5-49V                | 90%              | 0.95                 | 113*43*25mm        |
| FLS-60-1500 DALI-2 DT8 LN PRO | 60W         | 220-240VAC            | 900-1500mA             | 9-49V                  | 90%              | 0.95                 | 113*43*25mm        |

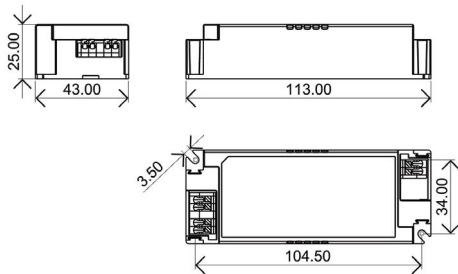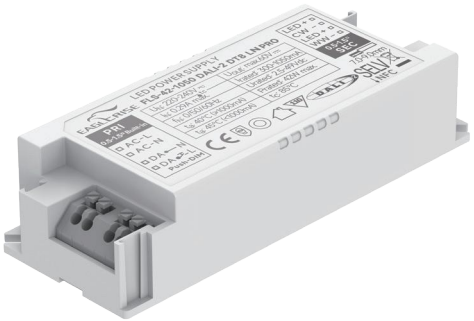


迷你型 - 智能系列

DALI-2 高效系列

- 可适配II类灯具
  - For luminaire of protection class II
- 隔离/安全低电压/内置式/独立式（带侧盖）
  - Isolated/ SELV/ Built-in/ Independent(With side caps)
- 输入电压 220-240VAC、176-280VDC
  - Input voltage: 220-240VAC、176-280VDC
- 多重保护：短路保护、过载保护、过压保护、过温保护
  - Protections: SCP/ OLP/ OVP/ OTP
- 支持DALI、PUSH调光
  - Support DALI, PUSH dimming
- 22mm高
  - 22mm height
- EOFi=15%
  - EOFi=15%
- 含DALI协议251、252、253
  - DALI-2 Parts 251, 252, 253
- 效率>93%; 功率因数>0.95
  - Efficiency>93%; Power factor>0.95
- 适用于应急照明，符合EN 50172
  - Suitable for emergency lighting acc. to EN 50172
- 5年质保
  - 5 years warranty
- Ta, Tc: 45°C/ 85°C
  - Ta, Tc: 45°C/ 85°C

| Model<br>型号                | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|----------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FLS-12-300 DALI-2 LD1 ADV  | 12W         | 220-240V              | 150-300mA              | 24-42V                 | 91%              | 0.95                 | 98*43*22mm         |
| FLS-30-700 DALI-2 LD1 ADV  | 30W         | 220-240V              | 350-700mA              | 24-42V                 | 93%              | 0.95                 | 98*43*22mm         |
| FLS-42-1050 DALI-2 LD1 ADV | 42W         | 220-240V              | 700-1050mA             | 24-42V                 | 93%              | 0.95                 | 98*43*22mm         |


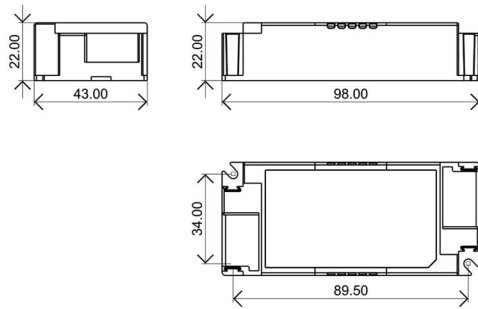


迷你型 - 智能系列

DALI-2 色温可调

- 可适配/ II类灯具
  - For luminaire of protection class I and class II
- 隔离/安全低电压/内置式/独立式（带侧盖）
  - Isolated/ SELV/ Built-in/ Independent(With side caps)
- 输入电压 220-240VAC
  - Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
  - Protections: SCP/ OLP/ OVP/ OTP
- 支持DALI、PUSH调光
  - Support DALI, PUSH dimming
- 调光范围：1%-100%
  - Dimming range 1%-100%
- 拨码调节输出电流
  - Output current adjusted via DIP-switch
- 含DALI协议251、252、253
  - DALI-2 Parts 251, 252, 253
- 效率>92%; 功率因数>0.95
  - Efficiency>92%; Power factor>0.95
- 适用于应急照明，符合EN 50172
  - Suitable for emergency lighting acc. to EN 50172
- 5年质保
  - 5 years warranty
- Ta, Tc: 45°C/ 85°C
  - Ta, Tc: 45°C/ 85°C

| Model<br>型号               | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|---------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FLS-36-850 DALI-2 CCT LD  | 36W         | 220-240VAC            | 550-850mA              | 24-42V                 | 92%              | 0.95                 | 113*43*25mm        |
| FLS-42-1050 DALI-2 CCT LD | 42W         | 220-240VAC            | 500-1050mA             | 24-42V                 | 92%              | 0.95                 | 113*43*25mm        |

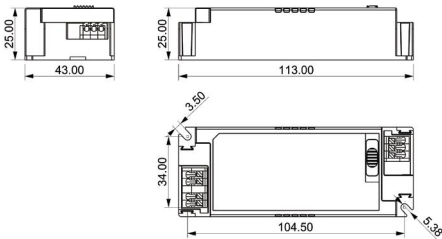
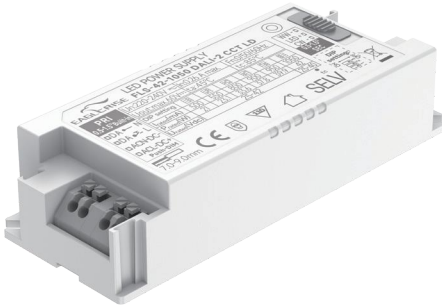


迷你型 - 智能系列

DALI-2

- 可适配/ II类灯具
  - For luminaire of protection class I and class II
- 隔离/安全低电压/内置式/独立式（带侧盖）
  - Isolated/ SELV/ Built-in/ Independent(With side caps)
- 输入电压 220-240VAC
  - Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
  - Protections: SCP/ OLP/ OVP/ OTP
- 支持DALI、PUSH调光，走廊模式
  - Support DALI, PUSH dimming, corridor mode
- 调光范围：1%-100%
  - Dimming range 1%-100%
- 拨码调节输出电流，共16个电流档
  - Output current adjusted via DIP-switch, 16 current steps
- 含DALI协议251、252、253
  - DALI-2 Parts 251, 252, 253
- 效率>89%; 功率因数>0.95
  - Efficiency>89%; Power factor>0.95
- 适用于应急照明，符合EN 50172
  - Suitable for emergency lighting acc. to EN 50172
- 5年质保
  - 5 years warranty
- Ta, Tc: 45°C/ 85°C
  - Ta, Tc: 45°C/ 85°C

| Model<br>型号               | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|---------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FLS-30-700 DALI-2 LD ECO  | 30W         | 220-240VAC            | 150-700mA              | 24-42V                 | 87%              | 0.97                 | 97*43*30mm         |
| FLS-44-1050 DALI-2 LD ECO | 44W         | 220-240VAC            | 700-1050mA             | 24-42V                 | 89%              | 0.97                 | 97*43*30mm         |
| FLS-42-1050 DALI-2 LD ADV | 42W         | 220-240VAC            | 150-1050mA             | 2.5-52V                | 87%              | 0.95                 | 97*43*30mm         |

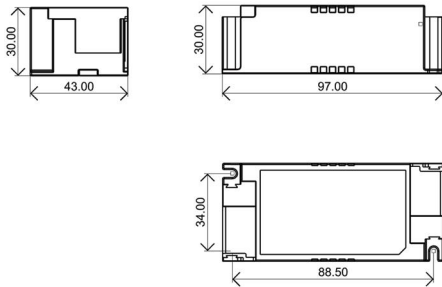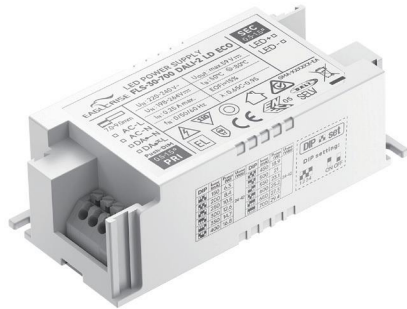


迷你型 - 智能系列

DALI-2

- 可适配I/ II类灯具
- For luminaire of protection class I and class II
- 隔离/安全低电压/内置式/独立式（带侧盖）
- Isolated/ SELV/ Built-in/ Independent(With side caps)
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 支持DALI、PUSH调光，走廊模式
- Support DALI, PUSH dimming, corridor mode
- 调光范围：1%-100%
- Dimming range 1%-100%
- 拨码调节输出电流
- Output current adjusted via DIP-switch
- 含DALI协议251、252、253
- DALI-2 Parts 251, 252, 253
- 效率>90%; 功率因数>0.95
- Efficiency>90%; Power factor>0.95
- 适用于应急照明，符合EN 50172
- Suitable for emergency lighting acc. to EN 50172
- 22mm高
- 22mm height
- 5年质保
- 5 years warranty
- Ta, Tc: 45°C/ 85°C
- Ta, Tc: 45°C/ 85°C

| Model<br>型号                | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|----------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FLS-20-500 DALI-2 LD PRO   | 20W         | 220-240VAC            | 80-500mA               | 2.5-49V                | 87%              | 0.95                 | 88*40*22mm         |
| FLS-30-700 DALI-2 LD PRO   | 30W         | 220-240VAC            | 150-700mA              | 2.5-49V                | 90%              | 0.95                 | 98*43*22mm         |
| FLS-42-1050 DALI-2 LD PRO  | 42W         | 220-240VAC            | 300-1050mA             | 2.5-49V                | 90%              | 0.95                 | 98*43*22mm         |
| FLS-42-1050 DALI-2 LD1 PRO | 42W         | 220-240VAC            | 150-1050mA             | 2.5-49V                | 90%              | 0.95                 | 98*43*22mm         |
| FLS-60-1500 DALI-2 LD PRO  | 60W         | 220-240VAC            | 900-1500mA             | 9-49V                  | 90%              | 0.95                 | 113*43*25mm        |

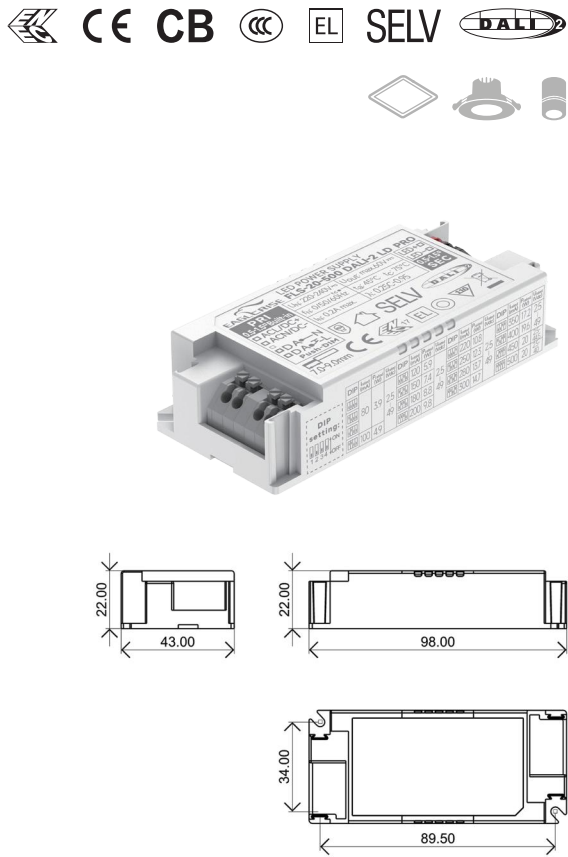


迷你型 - 智能系列

DALI-2 0.1%调光

- 可适配I/ II类灯具
- For luminaire of protection class I and class II
- 隔离/安全低电压/内置式/独立式（带侧盖）
- Isolated/ SELV/ Built-in/ Independent(With side caps)
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 支持DALI、PUSH调光，走廊模式
- Support DALI, PUSH dimming, corridor mode
- 调光范围：0.1%-100%
- Dimming range 0.1%-100%
- 拨码调节输出电流
- Output current adjusted via DIP-switch
- 含DALI协议251、252、253
- DALI-2 Parts 251, 252, 253
- 效率>90%; 功率因数>0.95
- Efficiency>90%; Power factor>0.95
- 适用于应急照明，符合EN 50172
- Suitable for emergency lighting acc. to EN 50172
- 22mm高
- 22mm height
- 5年质保
- 5 years warranty
- Ta, Tc: 45°C/ 85°C
- Ta, Tc: 45°C/ 85°C

| Model<br>型号                | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|----------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FLS-42-1050 DALI-2 LD2 PRO | 42W         | 220-240VAC            | 300-1050mA             | 2.5-49V                | 90%              | 0.95                 | 98*43*22mm         |

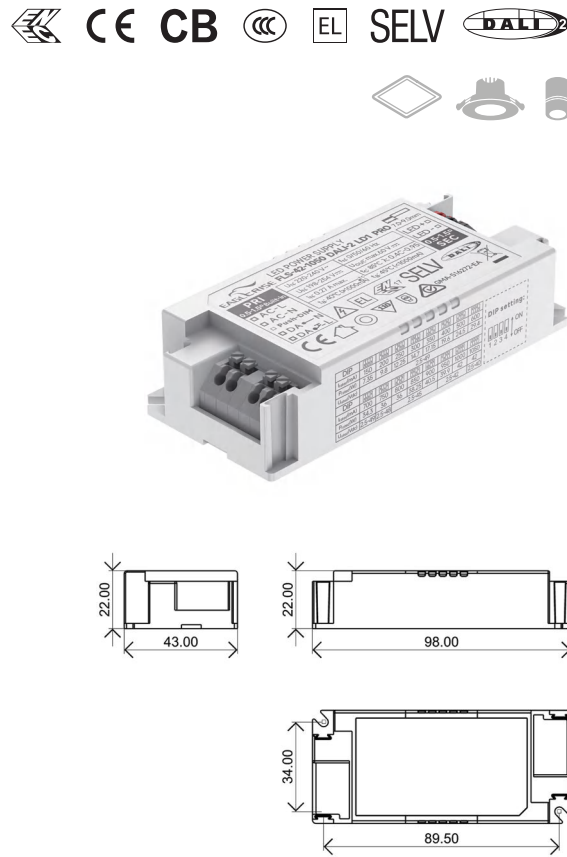


迷你型 - 智能系列

DALI-2+NFC

- 可适配I/ II类灯具
  - For luminaire of protection class I and class II
- 隔离/安全低电压/内置式/独立式（带侧盖）
  - Isolated/ SELV/ Built-in/ Independent(With side caps)
- 输入电压 220-240VAC
  - Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
  - Protections: SCP/ OLP/ OVP/ OTP
- 支持DALI、PUSH调光，走廊模式
  - Support DALI, PUSH dimming, corridor mode
- 调光范围：1%-100%
  - Dimming range 1%-100%
- NFC调节输出电流
  - Output current adjusted via NFC
- 含DALI协议251、252、253
  - DALI-2 Parts 251, 252, 253
- 效率>89%; 功率因数>0.95
  - Efficiency>89%; Power factor>0.95
- 适用于应急照明，符合EN 50172
  - Suitable for emergency lighting acc. to EN 50172
- 22mm高
  - 22mm height
- 5年质保
  - 5 years warranty
- Ta, Tc: 45°C/ 85°C
  - Ta, Tc: 45°C/ 85°C

| Model<br>型号              | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|--------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FLS-20-500 DALI-2 LN PRO | 20W         | 220-240VAC            | 80-500mA               | 2.5-49V                | 87%              | 0.95                 | 88*40*22mm         |
| FLS-30-700 DALI-2 LN PRO | 30W         | 220-240VAC            | 150-700mA              | 2.5-49V                | 89%              | 0.95                 | 98*43*22mm         |


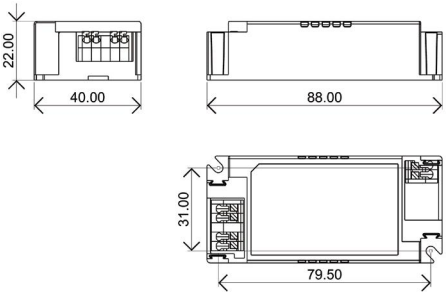


迷你型 - 智能系列

0-10V

- 可适配I/ II类灯具
  - For luminaire of protection class I and class II
- 隔离/安全低电压/内置式/独立式（带侧盖）
  - Isolated/ SELV/ Built-in/ Independent(With side caps)
- 输入电压 220-240VAC
  - Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
  - Protections: SCP/ OLP/ OVP/ OTP
- 0-10V调光
  - Dimmable via 0-10V
- 调光范围：1%-100%
  - Dimming range 1%-100%
- 拨码调节输出电流
  - Output current adjusted via DIP-switch
- 效率>90%; 功率因数>0.95
  - Efficiency>90%; Power factor>0.95
- 适用于应急照明，符合EN 50172
  - Suitable for emergency lighting acc. to EN 50172
- 22mm高
  - 22mm height
- 5年质保
  - 5 years warranty
- Ta, Tc: 45°C/ 85°C
  - Ta, Tc: 45°C/ 85°C



| Model<br>型号             | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|-------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FLS-20-500 0-10 LD ADV  | 20W         | 220-240VAC            | 350-500mA              | 9-42V                  | 84%              | 0.95                 | 98*43*22mm         |
| FLS-32-700 0-10 LD ADV  | 32W         | 220-240VAC            | 550-700mA              | 9-42V                  | 85%              | 0.95                 | 98*43*22mm         |
| FLS-42-1050 0-10 LD ADV | 42W         | 220-240VAC            | 700-1050mA             | 9-42V                  | 86%              | 0.95                 | 113*43*25mm        |
| FLS-60-1050 0-10 LD ADV | 60W         | 220-240VAC            | 1150-1500mA            | 9-42V                  | 88%              | 0.95                 | 123*43*25mm        |

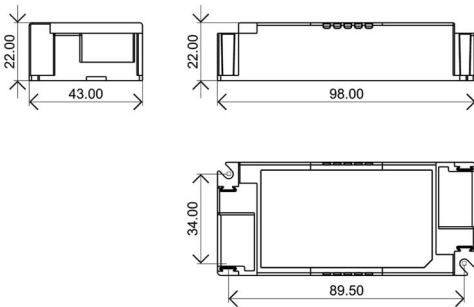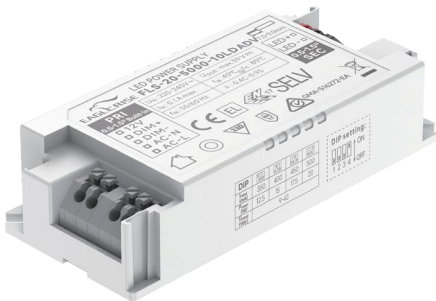

迷你型 - 智能系列

无线

- 可适配I/ II类灯具
- For luminaire of protection class I and class II
- 隔离/安全低电压/内置式/独立式（带侧盖）
- Isolated/ SELV/ Built-in/ Independent(With side caps)
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 支持CASAMBI调光
- CASAMBI dimming
- 调光范围：1%-100%
- Dimming range 1%-100%
- 拨码调节输出电流，共16个电流档
- Output current adjusted via DIP-switch, 16 current steps
- 效率>89%; 功率因数>0.95
- Efficiency>89%; Power factor>0.95
- 5年质保
- 5 years warranty
- Ta, Tc: 45°C/ 85°C
- Ta, Tc: 45°C/ 85°C

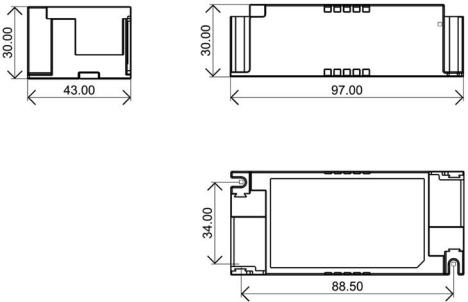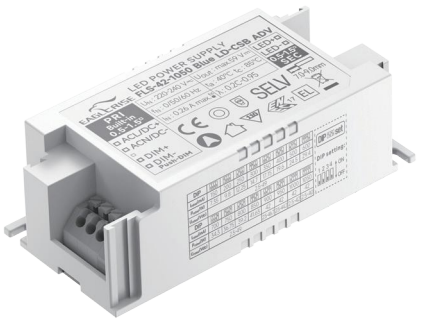



| Model<br>型号 | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|-------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
|-------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|

|                             |     |            |            |         |     |      |            |
|-----------------------------|-----|------------|------------|---------|-----|------|------------|
| FLS-42-1050 Blue LD-CSB ADV | 42W | 220-240VAC | 150-1050mA | 2.5-49V | 89% | 0.95 | 97*43*30mm |
|-----------------------------|-----|------------|------------|---------|-----|------|------------|

迷你型

高效

- 可适配I/ II类灯具
- For luminaire of protection class I and class II
- 隔离/安全低电压/内置式/独立式（带侧盖）
- Isolated/ SELV/ Built-in/ Independent(With side caps)
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 拨码调节输出电流
- Output current adjusted via DIP-switch
- 效率>94%; 功率因数>0.95
- Efficiency>94%; Power factor>0.95
- 适用于应急照明，符合EN 50172
- Suitable for emergency lighting acc. to EN 50172
- 22mm高
- 22mm高
- 5年质保
- 5 years warranty
- Ta, Tc: 45°C/ 85°C
- Ta, Tc: 45°C/ 85°C

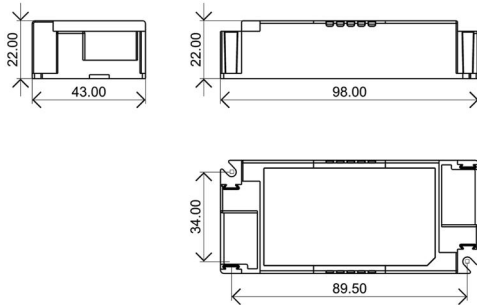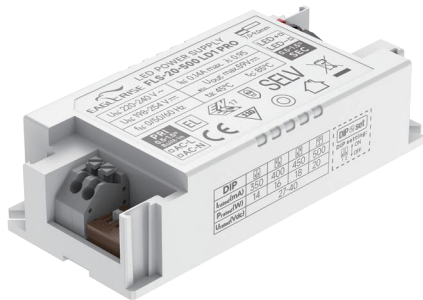

| Model<br>型号 | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|-------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
|-------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|


|                     |     |            |            |        |     |      |            |
|---------------------|-----|------------|------------|--------|-----|------|------------|
| FLS-20-500 LD1 PRO  | 20W | 220-240VAC | 350-500mA  | 27-40V | 93% | 0.95 | 98*43*22mm |
| FLS-30-700 LD1 PRO  | 30W | 220-240VAC | 550-700mA  | 27-40V | 94% | 0.95 | 98*43*22mm |
| FLS-38-900 LD1 PRO  | 38W | 220-240VAC | 750-900mA  | 27-40V | 94% | 0.95 | 98*43*22mm |
| FLS-42-1050 LD1 PRO | 42W | 220-240VAC | 900-1050mA | 27-40V | 94% | 0.95 | 98*43*22mm |

迷你型

色温可调

- 可适配I/ II类灯具
- For luminaire of protection class I and class II
- 隔离/安全低电压/内置式/独立式（带侧盖）
- Isolated/ SELV/ Built-in/ Independent(With side caps)
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 拨码调节输出电流
- Output current adjusted via DIP-switch
- 拨码调节色温
- CCT adjustable via DIP-switch
- 效率>90%; 功率因数>0.95
- Efficiency>90%; Power factor>0.95
- 5年质保
- 5 years warranty
- Ta, Tc: 45°C/ 85°C
- Ta, Tc: 45°C/ 85°C

CE CB CCC SELV

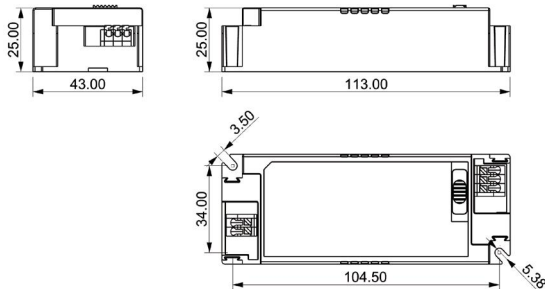



| Model<br>型号        | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|--------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FLS-36-850 CCT LD  | 36W         | 220-240VAC            | 550-850mA              | 30-40V                 | 90%              | 0.95                 | 113*43*25mm        |
| FLS-42-1050 CCT LD | 42W         | 220-240VAC            | 500-1050mA             | 25-40V                 | 90%              | 0.95                 | 113*43*25mm        |

迷你型

拨码

- 可适配I/ II类灯具
- For luminaire of protection class I and class II
- 隔离/安全低电压/内置式/独立式（带侧盖）
- Isolated/ SELV/ Built-in/ Independent(With side caps)
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 拨码调节输出电流，共4个电流档
- Output current adjusted via DIP-switch, 4 current steps
- 22mm高
- 22mm height
- 效率>90%; 功率因数>0.95
- Efficiency>90%; Power factor>0.95
- 5年质保
- 5 years warranty
- Ta, Tc: 45°C/ 90°C
- Ta, Tc: 45°C/ 90°C

CE CB CCC EL SELV

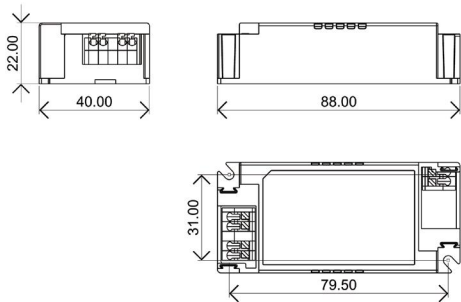
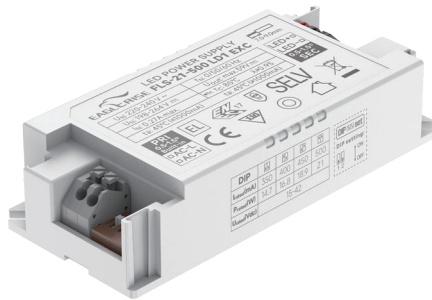


| Model<br>型号         | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|---------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FLS-21-500 LD1 EXC  | 21W         | 220-240VAC            | 350-500mA              | 27-42V                 | 85%              | 0.95                 | 88*40*22mm         |
| FLS-30-700 LD1 EXC  | 30W         | 220-240VAC            | 550-700mA              | 9-42V                  | 89%              | 0.95                 | 88*40*22mm         |
| FLS-38-900 LD1 EXC  | 38W         | 220-240VAC            | 750-900mA              | 9-42V                  | 89%              | 0.95                 | 88*40*22mm         |
| FLS-40-1050 LD1 EXC | 40W         | 220-240VAC            | 900-1050mA             | 9-42V                  | 90%              | 0.95                 | 88*40*22mm         |

Mini Series

Dip switch

- 可适配I/ II类灯具
- For luminaire of protection class I and class II
- 隔离/安全低电压/内置式/独立式（带侧盖）
- Isolated/ SELV/ Built-in/ Independent(With side caps)
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 拨码调节输出电流
- Output current adjusted via DIP-switch
- 22mm高
- 22mm height
- 效率>89%; 功率因数>0.95
- Efficiency>89%; Power factor>0.95
- 5年质保
- 5 years warranty
- Ta, Tc: 45°C/ 80°C
- Ta, Tc: 45°C/ 80°C

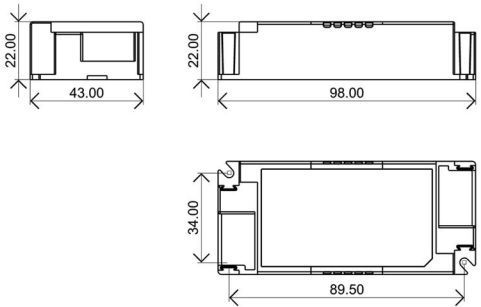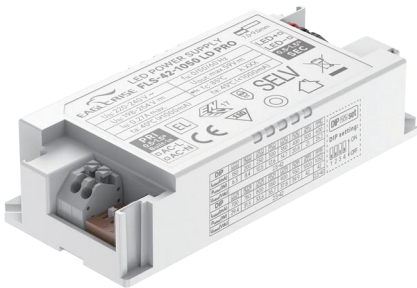

| Model<br>型号         | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|---------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FLS-42-1050 LD PRO  | 42W         | 220-240VAC            | 150-1050mA             | 2.5-42V                | 89%              | 0.95                 | 98*43*22mm         |
| FLS-42-1050 LD1 ADV | 42W         | 220-240VAC            | 300-1050mA             | 9-40V                  | 89%              | 0.95                 | 98*43*22mm         |

导轨电源

LED DRIVER  
TRACK SERIES


应用场景：  
导轨灯

导轨电源 - 智能系列

DALI-2 DT8

- 可适配II类灯具
- For luminaire of protection class II
- 隔离/安全低电压
- Isolated/ SELV
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- DT8色温可调, PUSH调光, 走廊模式
- Tunable white DT8, PUSH dimming, corridor mode
- 含DALI协议251、252、253
- DALI-2 Parts 251, 252 and 253
- 调光范围：1%-100%
- Dimming range 1%-100%
- 拨码调节输出电流，共14个电流档
- Output current adjusted via DIP-switch, 14 current steps
- 6线3回路DALI导轨系统
- 6 Wires 3 Circuit DALI Track System
- 效率>88%; 功率因数>0.95
- Efficiency>88%; Power factor>0.95
- 适配主流品牌轨道
- Adaptation to mainstream brands of track
- 黑白灰三色可选
- Available in black, white and grey
- 5年质保
- 5 years warranty
- Ta, Tc: 35°C/ 80°C
- Ta, Tc: 35°C/ 80°C

| Model<br>型号              | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|--------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FDS-28-750 DALI-2 DT8 LD | 28W         | 220-240VAC            | 100-750mA              | 10-42V                 | 88%              | 0.95                 | 218*31*42mm        |

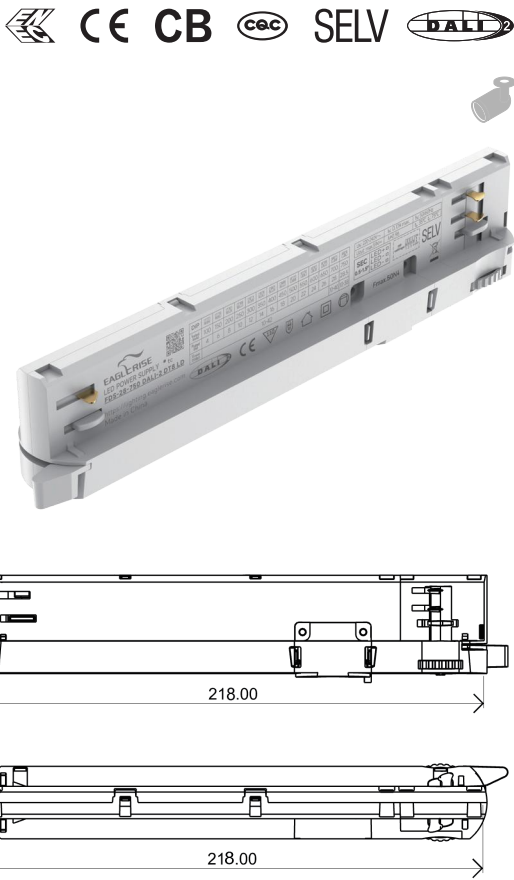


导轨电源 - 智能系列

DALI-2

- 可适配II类灯具
- For luminaire of protection class II
- 隔离/安全低电压
- Isolated/ SELV
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- DALI调光, PUSH调光, 走廊模式
- DALI dimming, PUSH dimming, corridor mode
- 含DALI协议251、252、253
- DALI-2 Parts 251, 252 and 253
- 调光范围：1%-100%
- Dimming range 1%-100%
- 拨码调节输出电流，共16个电流档
- Output current adjusted via DIP-switch, 16 current steps
- 6线3回路DALI导轨系统
- 6 Wires 3 Circuit DALI Track System
- 效率>89%; 功率因数>0.95
- Efficiency>89%; Power factor>0.95
- 适配主流品牌轨道
- Adaptation to mainstream brands of track
- 黑白灰三色可选
- Available in black, white and grey
- 5年质保
- 5 years warranty
- Ta, Tc: 35°C/ 85°C
- Ta, Tc: 35°C/ 80°C

| Model<br>型号               | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|---------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FDS-42-1050 DALI-2 LD PRO | 42W         | 220-240VAC            | 300-1050mA             | 2.5-42V                | 89%              | 0.95                 | 202*31*42mm        |

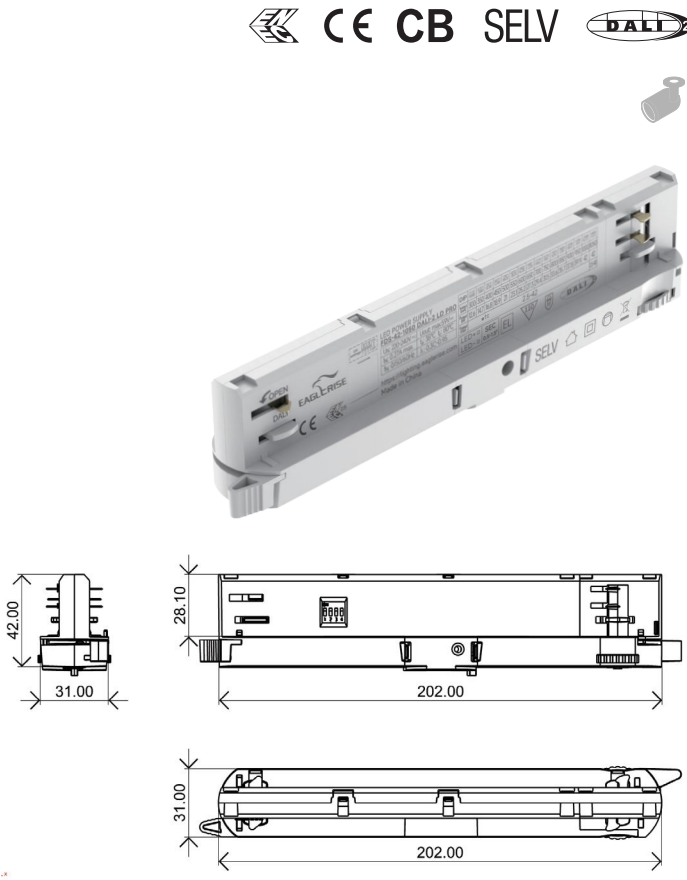


导轨电源 - 智能系列

DALI-2

- 可适配II类灯具
  - For luminaire of protection class II
- 隔离/安全低电压
  - Isolated/ SELV
- 输入电压 220-240VAC
  - Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
  - Protections: SCP/ OLP/ OVP/ OTP
- DALI调光, PUSH调光, 走廊模式
  - DALI dimming, PUSH dimming, corridor mode
- 含DALI协议251、252、253
  - DALI-2 Parts 251, 252 and 253
- 调光范围：1%-100%
  - Dimming range 1%-100%
- 拨码调节输出电流，共16个电流档
  - Output current adjusted via DIP-switch, 16 current steps
- 4线3回路DALI导轨系统
  - 4 Wires 3 Circuit DALI Track System
- 效率>88%; 功率因数>0.95
  - Efficiency>88%; Power factor>0.95
- 适配主流品牌轨道
  - Adaptation to mainstream brands of track
- 黑白灰三色可选
  - Available in black, white and grey
- 5年质保
  - 5 years warranty
- Ta, Tc: 35°C/ 85°C
  - Ta, Tc: 35°C/ 80°C

| Model<br>型号               | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|---------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FDS-42-1050 DALI-2 LD EXC | 42W         | 220-240VAC            | 300-1050mA             | 10-42V                 | 88%              | 0.95                 | 178*31*42mm        |

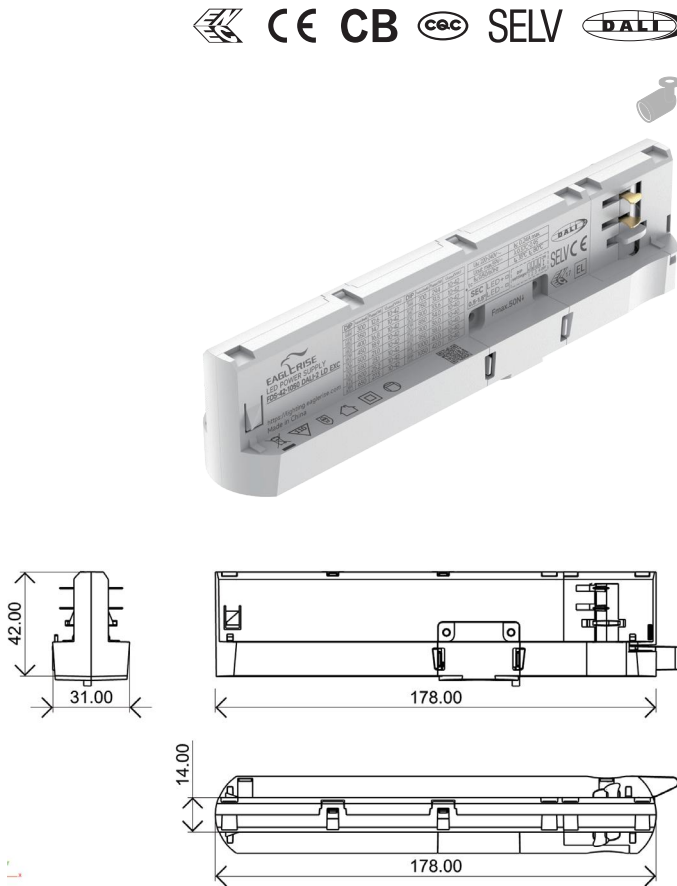


导轨电源 - 智能系列

CASAMBI

- 可适配II类灯具
  - For luminaire of protection class II
- 隔离/安全低电压
  - Isolated/ SELV
- 输入电压 220-240VAC
  - Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
  - Protections: SCP/ OLP/ OVP/ OTP
- CASAMBI调光
  - CASAMBI dimming
- 调光范围：1%-100%
  - Dimming range 1%-100%
- NFC调节输出电流
  - Output current adjusted via NFC
- 4线3回路导轨系统
  - 4 Wires 3 Circuit Track System
- 效率>89%; 功率因数>0.95
  - Efficiency>89%; Power factor>0.95
- 适配主流品牌轨道
  - Adaptation to mainstream brands of track
- 黑白灰三色可选
  - Available in black, white and grey
- 5年质保
  - 5 years warranty
- Ta, Tc: 35°C/ 85°C
  - Ta, Tc: 35°C/ 80°C


| Model<br>型号            | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FDS-32-800 Blue LN-CSB | 32W         | 220-240VAC            | 200-800mA              | 2.5-42V                | 89%              | 0.95                 | 161*31*42mm        |

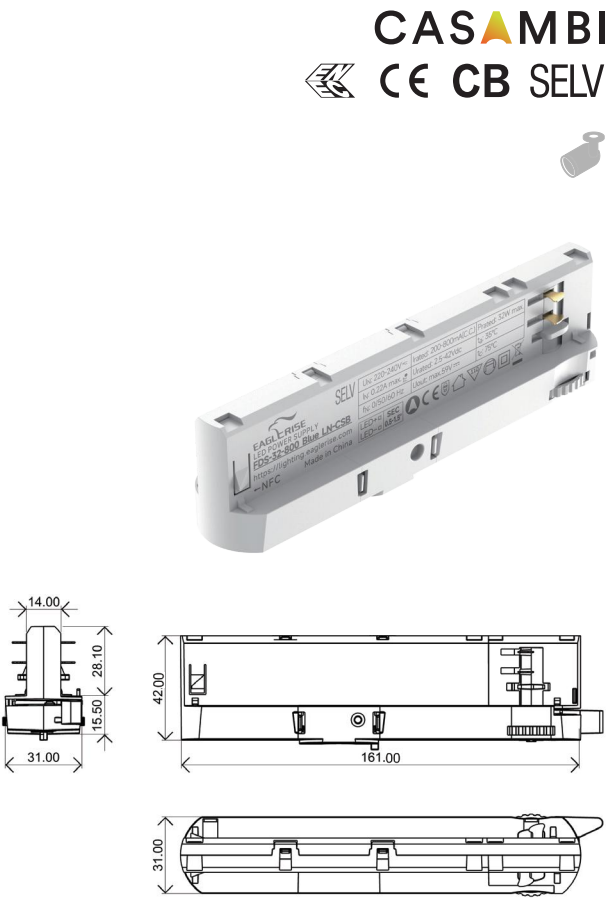

导轨电源 - 拨码系列

四线

- 可适配II类灯具
- For luminaire of protection class II
- 隔离/安全低电压
- Isolated/ SELV
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 拨码调节输出电流
- Output current adjusted via DIP-switch
- 色温通过拨码可调
- Optional CCT
- 4线3回路导轨系统
- 4 Wires 3 Circuit Track System
- 效率>90%; 功率因数>0.95
- Efficiency>90%; Power factor>0.95
- 适配主流品牌轨道
- Adaptation to mainstream brands of track
- 黑白灰三色可选
- Available in black, white and grey
- 5年质保
- 5 years warranty
- Ta, Tc: 35°C/ 75°C
- Ta, Tc: 35°C/ 75°C

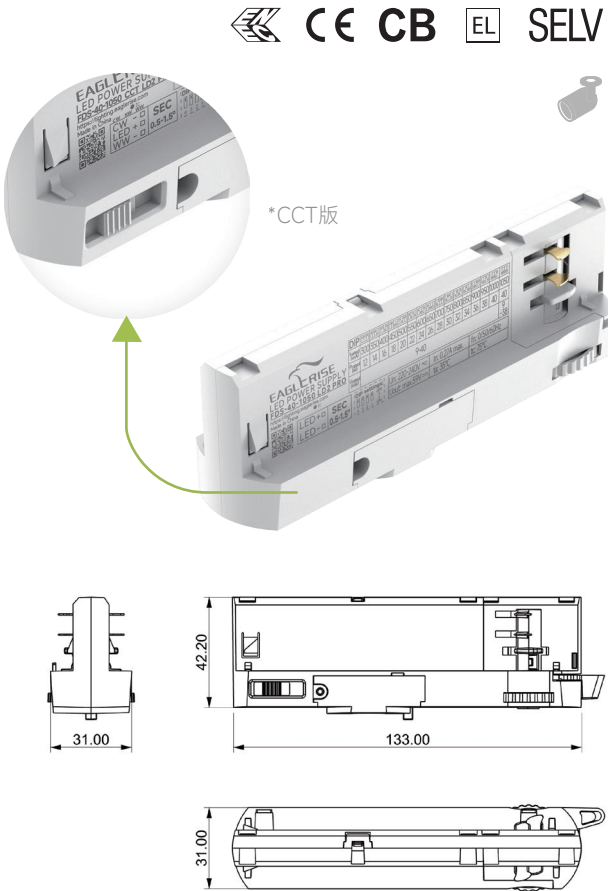


| Model<br>型号             | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|-------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FDS-40-1050 CCT LD2 PRO | 40W         | 220-240VAC            | 300-1050mA             | 9-40V                  | 90%              | 0.95                 | 133*31*42mm        |
| FDS-40-1050 LD2 PRO     | 40W         | 220-240VAC            | 300-1050mA             | 9-40V                  | 90%              | 0.95                 | 133*31*42mm        |

导轨电源 - 拨码系列

四线

- 可适配II类灯具
- For luminaire of protection class II
- 隔离/安全低电压
- Isolated/ SELV
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 拨码调节输出电流
- Output current adjusted via DIP-switch
- 4线3回路导轨系统
- 4 Wires 3 Circuit Track System
- 色温通过拨码可调
- Flexible CCT setting via 3-way DIP-switch
- 效率>89%; 功率因数>0.95
- Efficiency>89%; Power factor>0.95
- 适配主流品牌轨道
- Adaptation to mainstream brands of track
- 黑白灰三色可选
- Available in black, white and grey
- 5年质保
- 5 years warranty
- Ta, Tc: 35°C/ 75°C
- Ta, Tc: 35°C/ 75°C

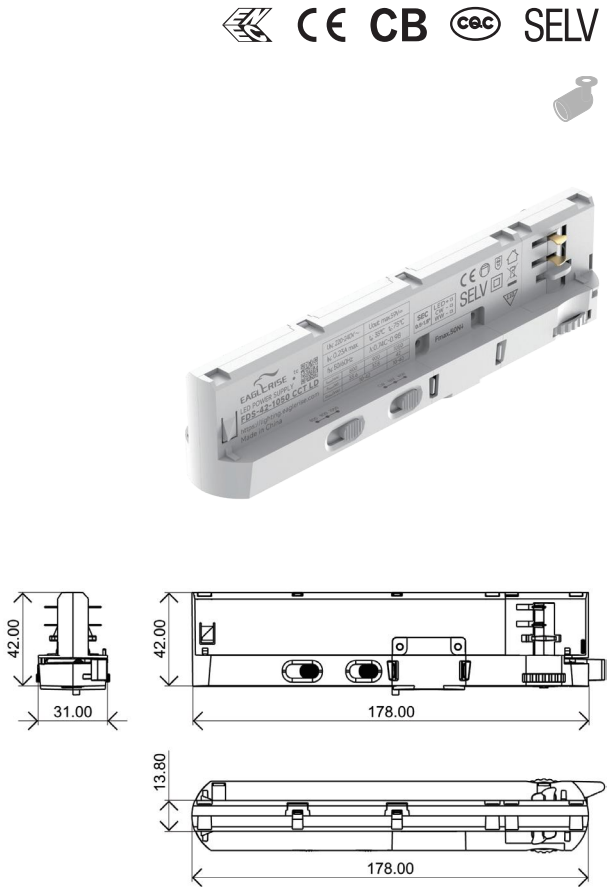


| Model<br>型号        | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|--------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FDS-42-1050 CCT LD | 42W         | 220-240VAC            | 800-1050mA             | 10-42V                 | 89%              | 0.95                 | 178*31*42mm        |

导轨电源 - 拨码系列

四线

- 可适配II类灯具
- For luminaire of protection class II
- 隔离/安全低电压
- Isolated/ SELV
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 拨码调节输出电流
- Output current adjusted via DIP-switch
- 4线3回路导轨系统
- 4 Wires 3 Circuit Track System
- 效率>90%; 功率因数>0.95
- Efficiency>90%; Power factor>0.95
- 适配主流品牌轨道
- Adaptation to mainstream brands of track
- 黑白灰三色可选
- Available in black, white and grey
- 123mm长
- Length: 123mm
- 5年质保
- 5 years warranty
- Ta, Tc: 35°C/ 75°C
- Ta, Tc: 35°C/ 75°C

CE CB SELV

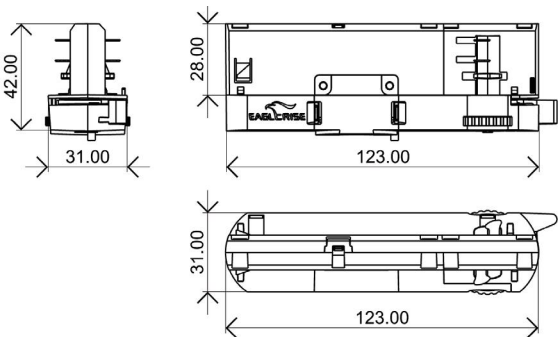



| Model<br>型号          | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|----------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FDS-20-500 LD EXC S  | 20W         | 220-240VAC            | 150-500mA              | 10-40V                 | 90%              | 0.95                 | 123*31*42mm        |
| FDS-28-750 LD EXC S  | 28W         | 220-240VAC            | 100-750mA              | 10-40V                 | 88%              | 0.95                 | 123*31*42mm        |
| FDS-42-1050 LD EXC S | 42W         | 220-240VAC            | 700-1050mA             | 10-42V                 | 90%              | 0.95                 | 133*31*42mm        |

导轨电源 - 拨码系列

四线

- 可适配II类灯具
- For luminaire of protection class II
- 隔离/安全低电压
- Isolated/ SELV
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 拨码调节输出电流，共6个电流档
- Output current adjusted via DIP-switch, 6 current steps
- 4线3回路导轨系统
- 4 Wires 3 Circuit Track System
- 效率>90%; 功率因数>0.95
- Efficiency>90%; Power factor>0.95
- 适配主流品牌轨道
- Adaptation to mainstream brands of track
- 黑白灰三色可选
- Available in black, white and grey
- 5年质保
- 5 years warranty
- Ta, Tc: 35°C/ 75°C
- Ta, Tc: 35°C/ 75°C

CE CB SELV

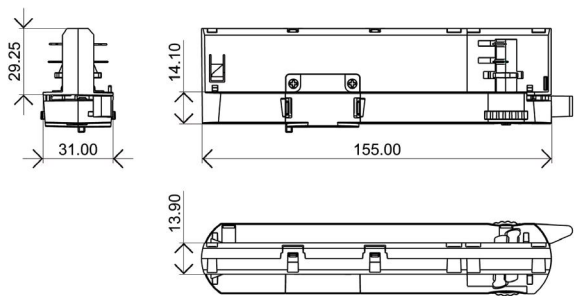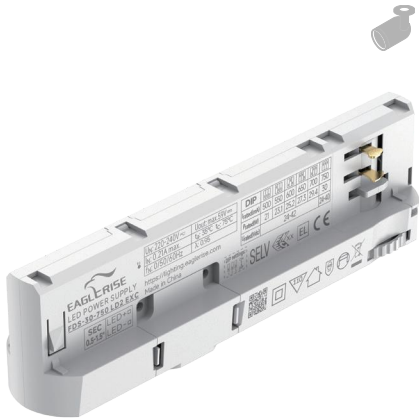


| Model<br>型号         | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|---------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FDS-18-450 LD2 EXC  | 18W         | 220-240VAC            | 200-450mA              | 24-42V                 | 89%              | 0.95                 | 155*31*42mm        |
| FDS-30-750 LD2 EXC  | 30W         | 220-240VAC            | 500-750mA              | 24-42V                 | 90%              | 0.95                 | 155*31*42mm        |
| FDS-42-1050 LD2 EXC | 42W         | 220-240VAC            | 800-1050mA             | 24-42V                 | 90%              | 0.95                 | 155*31*42mm        |

导轨电源 - 拨码系列

四线

- 可适配II类灯具
- For luminaire of protection class II
- 隔离/安全低电压
- Isolated/ SELV
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 拨码调节输出电流，共16个电流档
- Output current adjusted via DIP-switch, 16 current steps
- 4线3回路导轨系统
- 4 Wires 3 Circuit Track System
- 半隐藏式设计
- Semi-hidden type
- 效率>89%; 功率因数>0.95
- Efficiency>89%; Power factor>0.95
- 适配主流品牌轨道
- Adaptation to mainstream brands of track
- 黑白灰三色可选
- Available in black, white and grey
- 5年质保
- 5 years warranty
- Ta, Tc: 35°C/ 75°C
- Ta, Tc: 35°C/ 75°C

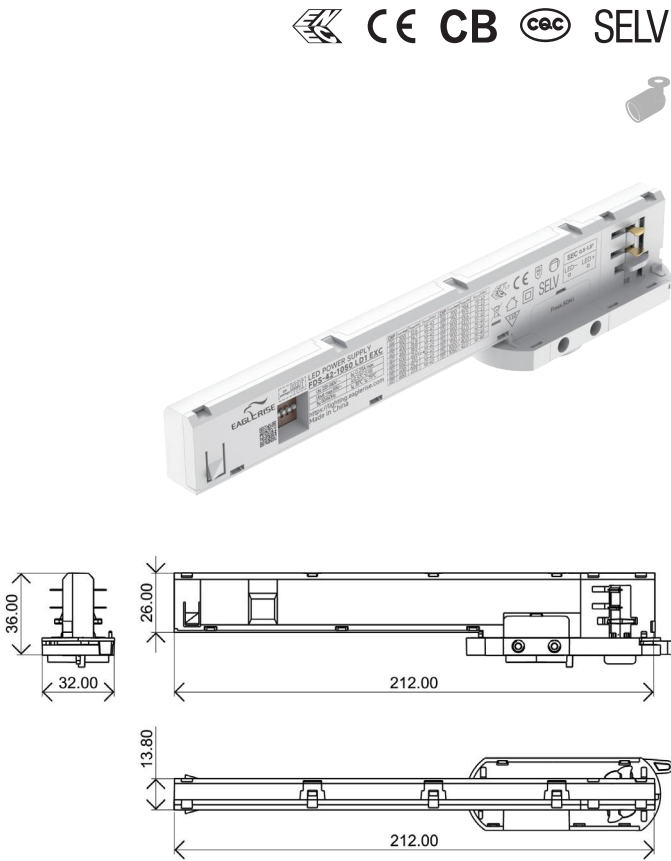


| Model<br>型号         | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|---------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FDS-42-1050 LD1 EXC | 42W         | 220-240VAC            | 300-1050mA             | 10-42V                 | 89%              | 0.95                 | 212*32*36mm        |

导轨电源 - 拨码系列

三线

- 可适配II类灯具
- For luminaire of protection class II
- 隔离/安全低电压
- Isolated/ SELV
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 拨码调节输出电流，共16个电流档
- Output current adjusted via DIP-switch, 16 current steps
- 3线单回路导轨系统
- 3 Wires Single Circuit Track System
- 效率>89%; 功率因数>0.95
- Efficiency>89%; Power factor>0.95
- 适配主流品牌轨道
- Adaptation to mainstream brands of track
- 黑白灰三色可选
- Available in black, white and grey
- 5年质保
- 5 years warranty
- Ta, Tc: 35°C/ 75°C
- Ta, Tc: 35°C/ 75°C

| Model<br>型号             | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|-------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FDS-12-300 LD2-3 Wires  | 12W         | 220-240VAC            | 150-300mA              | 15-42V                 | 85%              | 0.95                 | 130*34*45.5mm      |
| FDS-21-500 LD2-3 Wires  | 21W         | 220-240VAC            | 350-500mA              | 15-42V                 | 88%              | 0.95                 | 130*34*45.5mm      |
| FDS-30-750 LD2-3 Wires  | 30W         | 220-240VAC            | 600-750mA              | 15-42V                 | 89.5%            | 0.95                 | 130*34*45.5mm      |
| FDS-42-1050 LD2-3 Wires | 42W         | 220-240VAC            | 700-1050mA             | 15-42V                 | 89.5%            | 0.95                 | 130*34*45.5mm      |

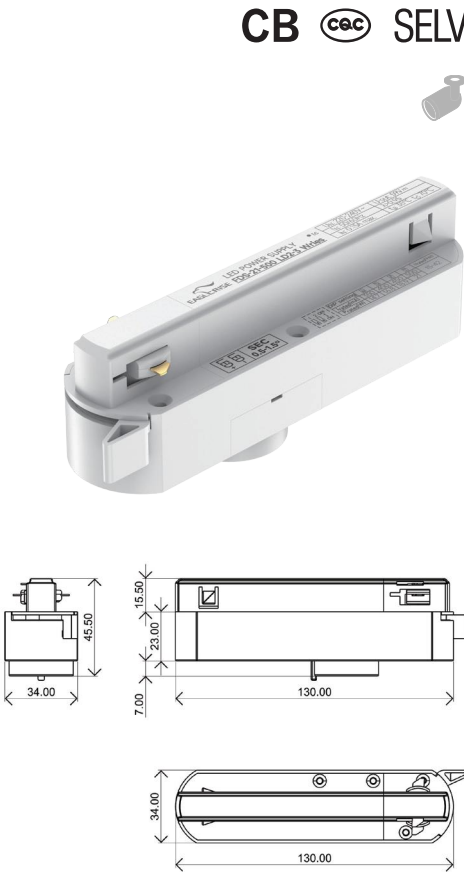

恒压系列

LED DRIVER  
C.V. SERIES

应用场景：  
LED灯带

恒压 - 智能系列

DALI-2 DT8

- 可适配I/ II类灯具
- For luminaire of protection class I and class II
- 隔离/安全低电压/独立式
- Isolated/ SELV/ Independent
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 支持DALI、PUSH调光，走廊模式
- DALI dimming, PUSH dimming, corridor mode
- 含DALI协议251, 252, 253
- DALI-2 Parts 251, 252, 253
- 调光范围：1%-100%
- Dimming range 1%-100%
- 效率>91%; 功率因数>0.95
- Efficiency>91%; Power factor>0.95
- 5年质保
- 5 years warranty
- Ta, Tc: 45°C/ 80°C
- Ta, Tc: 45°C/ 80°C




| Model<br>型号                   | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|-------------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| VTS-200-24 DALI-2 0-10 IP65 L | 200W        | 220-240VAC            | 0-8.33A                | 24V                    | 91%              | 0.95                 | 350*45*33mm        |
| VTS-200-24 DALI-2 0-10 L      | 200W        | 220-240VAC            | 0-8.33A                | 24V                    | 91%              | 0.95                 | 350*45*33mm        |

恒压 - 智能系列

DALI-2 DT8+NFC

- 可适配I/ II类灯具
- For luminaire of protection class I and class II
- 隔离/安全低电压/独立式
- Isolated/ SELV/ Independent
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- DT8色温可调，PUSH调光，走廊模式
- Tunable white DT8, PUSH dimming, corridor mode
- 含DALI协议251, 252, 253
- DALI-2 Parts 251, 252, 253
- 调光范围：1%-100%
- Dimming range 1%-100%
- 效率>91%; 功率因数>0.95
- Efficiency>91%; Power factor>0.95
- 5年质保
- 5 years warranty
- Ta, Tc: 45°C/ 80°C
- Ta, Tc: 45°C/ 80°C
- LN ADV版：通过NFC选择DT8或DT6模式；LI1: DT8模式
- LN ADV: DT8 or DT6 switchable by NFC; LI1: can be used in DT8 mode

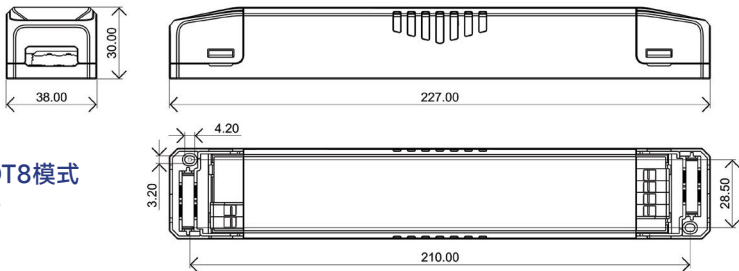


| Model<br>型号                 | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|-----------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| LS-45-24 DALI-2 DT8 LN ADV  | 45W         | 220-240VAC            | 0-1.875A               | 24V                    | 89%              | 0.95                 | 227*38*30mm        |
| LS-45-24 DALI-2 DT8 LI1     | 45W         | 220-240VAC            | 0-1.88A                | 24V                    | 89%              | 0.95                 | 227*38*30mm        |
| LS-80-24 DALI-2 DT8 LN ADV  | 80W         | 220-240VAC            | 0-3.33A                | 24V                    | 89%              | 0.95                 | 318*38*30mm        |
| LS-80-24 DALI-2 DT8 LI1     | 80W         | 220-240VAC            | 0-3.33A                | 24V                    | 89%              | 0.95                 | 318*38*30mm        |
| LS-150-24 DALI-2 DT8 LN ADV | 150W        | 220-240VAC            | 0-6.25A                | 24V                    | 90%              | 0.95                 | 318*38*30mm        |
| LS-150-24 DALI-2 DT8 LI1    | 150W        | 220-240VAC            | 0-6.25A                | 24V                    | 91%              | 0.95                 | 318*38*30mm        |

恒压 - 智能系列

DALI-2

- 可适配I/ II类灯具
- For luminaire of protection class I and class II
- 隔离/安全低电压/独立式
- Isolated/ SELV/ Independent
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- DALI-2调光，PUSH调光，走廊模式
- DALI-2 dimming, PUSH dimming, corridor mode
- 含DALI协议251, 252, 253
- DALI-2 Parts 251, 252, 253
- 调光范围：1%-100%
- Dimming range 1%-100%
- 效率>91%; 功率因数>0.95
- Efficiency>91%; Power factor>0.95
- 5年质保
- 5 years warranty
- Ta, Tc: 45°C/ 85°C
- Ta, Tc: 45°C/ 85°C

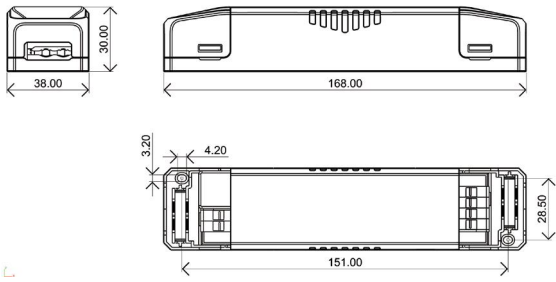


| Model<br>型号          | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|----------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| LS-45-24 DALI-2 LI1  | 45W         | 220-240VAC            | 0-1.88A                | 24V                    | 87%              | 0.95                 | 168*38*30mm        |
| LS-80-24 DALI-2 LI1  | 80W         | 220-240VAC            | 0-3.33A                | 24V                    | 89%              | 0.95                 | 227*38*30mm        |
| LS-150-24 DALI-2 LI1 | 150W        | 220-240VAC            | 0-6.25A                | 24V                    | 91%              | 0.95                 | 318*38*30mm        |
| LS-250-24 DALI-2 LI  | 250W        | 220-240VAC            | 0-10.41A               | 24V                    | 91%              | 0.95                 | 431*45*30mm        |

恒压 - 智能系列

DALI-2

- 可适配I/ II类灯具
- For luminaire of protection class I and class II
- 隔离/安全低电压/独立式
- Isolated/ SELV/ Independent
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- DALI-2调光，PUSH调光，走廊模式
- DALI-2 dimming, PUSH dimming, corridor mode
- 含DALI协议251，252，253
- DALI-2 Parts 251, 252, 253
- 调光范围：1%-100%
- Dimming range 1%-100%
- 效率>89%; 功率因数>0.95
- Efficiency>89%; Power factor>0.95
- 5年质保
- 5 years warranty
- Ta, Tc: 45°C/ 85°C
- Ta, Tc: 45°C/ 85°C

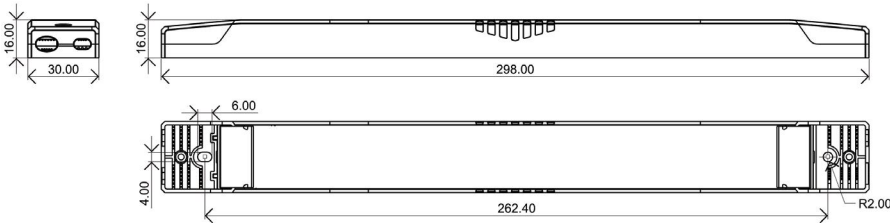


| Model<br>型号         | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|---------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| US-30-24 DALI-2 LI  | 30W         | 220-240VAC            | 0-1.25A                | 24V                    | 85%              | 0.95                 | 298*30*16mm        |
| US-60-24 DALI-2 LI  | 60W         | 220-240VAC            | 0-2.5A                 | 24V                    | 89%              | 0.95                 | 298*30*16mm        |
| US-100-24 DALI-2 LI | 100W        | 220-240VAC            | 0-4.16A                | 24V                    | 89%              | 0.95                 | 298*30*16mm        |

恒压 - 智能系列

0-10V

- 可适配II类灯具
- For luminaire of protection class II
- 隔离/安全低电压/独立式
- Isolated/ SELV/ Independent
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过温保护
- Protections: SCP/ OLP/ OTP
- 效率>92%; 功率因数>0.95
- Efficiency>92%; Power factor>0.95
- 5年质保
- 5 years warranty
- 支持0-10V、电阻、PWM调光
- Support 0-10V, RX, PWM dimming

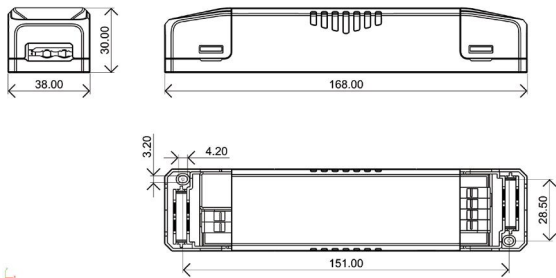


| Model<br>型号       | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|-------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| LS-45-24 0-10 LI  | 45W         | 220-240VAC            | 0-1.88A                | 24V                    | 87%              | 0.95                 | 168*38*30mm        |
| LS-80-24 0-10 LI  | 80W         | 220-240VAC            | 0-3.33A                | 24V                    | 89%              | 0.95                 | 227*38*30mm        |
| LS-150-24 0-10 LI | 150W        | 220-240VAC            | 0-6.25A                | 24V                    | 92%              | 0.95                 | 318*38*30mm        |
| LS-250-24 0-10 LI | 250W        | 220-240VAC            | 0-10.41A               | 24V                    | 91%              | 0.95                 | 431*45*30.5mm      |

恒压系列

ON/OFF

- 可适配II类灯具
- For luminaire of protection class II
- 隔离/安全低电压/独立式
- Isolated/ SELV/ Independent
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 效率>89%; 功率因数>0.95
- Efficiency>89%; Power factor>0.95
- 5年质保
- 5 years warranty
- Ta, Tc: 45°C/ 80°C
- Ta, Tc: 45°C/ 80°C

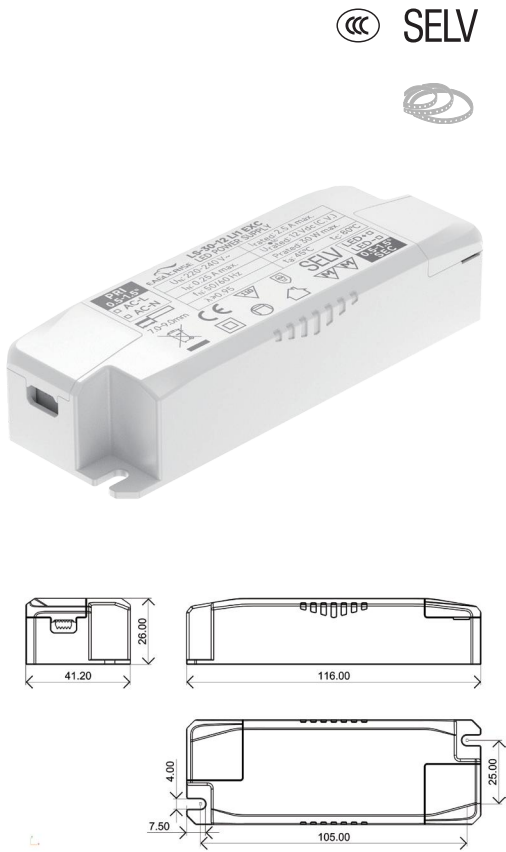


| Model<br>型号      | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| LS-30-12 LI1 EXC | 30W         | 220-240VAC            | 0-2.5A                 | 12V                    | 86%              | 0.95                 | 116*41.2*26mm      |
| LS-30-24 LI1 EXC | 30W         | 220-240VAC            | 0-1.25A                | 24V                    | 86%              | 0.95                 | 116*41.2*26mm      |
| LS-30-48 LI1 EXC | 30W         | 220-240VAC            | 0-0.625A               | 48V                    | 86%              | 0.95                 | 116*41.2*26mm      |
| LS-60-12 LI1 EXC | 60W         | 220-240VAC            | 0-5A                   | 12V                    | 88%              | 0.95                 | 150*45*30mm        |
| LS-60-24 LI1 EXC | 60W         | 220-240VAC            | 0-2.5A                 | 24V                    | 88%              | 0.95                 | 150*45*30mm        |
| LS-75-12 LI1 EXC | 75W         | 220-240VAC            | 0-6.25A                | 12V                    | 89%              | 0.95                 | 150*45*30mm        |
| LS-75-24 LI1 EXC | 75W         | 220-240VAC            | 0-3.13A                | 24V                    | 89%              | 0.95                 | 150*45*30mm        |

恒压系列

ON/OFF

- 可适配I/ II类灯具
- For luminaire of protection class II
- 隔离/安全低电压/独立式
- Isolated/ SELV/ Independent
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 效率>93%; 功率因数>0.95
- Efficiency>93%; Power factor>0.95
- 5年质保
- 5 years warranty
- Ta, Tc: 45°C/ 85°C
- Ta, Tc: 45°C/ 85°C

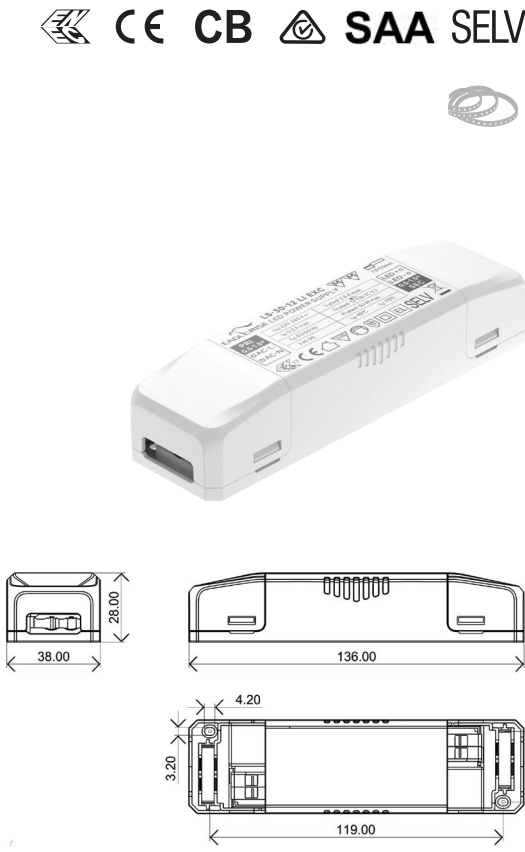


| Model<br>型号      | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| LS-30-12 LI EXC  | 30W         | 220-240VAC            | 0-2.5A                 | 12V                    | 87%              | 0.95                 | 136*38*28mm        |
| LS-30-24 LI EXC  | 30W         | 220-240VAC            | 0-1.25A                | 24V                    | 87%              | 0.95                 | 136*38*28mm        |
| LS-60-12 LI EXC  | 60W         | 220-240VAC            | 0-5A                   | 12V                    | 88%              | 0.95                 | 168*38*30mm        |
| LS-60-24 LI EXC  | 60W         | 220-240VAC            | 0-2.5A                 | 24V                    | 88%              | 0.95                 | 168*38*30mm        |
| LS-75-12 LI EXC  | 75W         | 220-240VAC            | 0-6.25A                | 12V                    | 88%              | 0.95                 | 168*38*30mm        |
| LS-75-24 LI EXC  | 75W         | 220-240VAC            | 0-3.13A                | 24V                    | 89%              | 0.95                 | 168*38*30mm        |
| LS-75-48 LI EXC  | 75W         | 220-240VAC            | 0-1.56A                | 48V                    | 90%              | 0.95                 | 168*38*30mm        |
| LS-120-24 LI EXC | 120W        | 220-240VAC            | 0-5A                   | 24V                    | 93%              | 0.95                 | 227*38*30mm        |
| LS-120-48 LI EXC | 120W        | 220-240VAC            | 0-2.5A                 | 48V                    | 93%              | 0.95                 | 227*38*30mm        |
| LS-150-24 LI EXC | 150W        | 220-240VAC            | 0-6.25A                | 24V                    | 93%              | 0.95                 | 227*38*30mm        |
| LS-150-48 LI EXC | 150W        | 220-240VAC            | 0-3.13A                | 48V                    | 93%              | 0.95                 | 227*38*30mm        |
| LS-200-24 LI EXC | 200W        | 220-240VAC            | 0-8.33A                | 24V                    | 93%              | 0.95                 | 318*45*30mm        |
| LS-200-48 LI EXC | 200W        | 220-240VAC            | 0-4.17A                | 48V                    | 93%              | 0.95                 | 318*45*30mm        |
| LS-250-24 LI EXC | 250W        | 220-240VAC            | 0-10.4A                | 24V                    | 93%              | 0.95                 | 318*45*30mm        |
| LS-250-48 LI EXC | 250W        | 220-240VAC            | 0-5.2A                 | 48V                    | 93%              | 0.95                 | 318*45*30mm        |

恒压系列

ON/OFF

- 可适配I/ II类灯具
- For luminaire of protection class II
- 隔离/安全低电压/独立式
- Isolated/ SELV/ Independent
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 效率>92%; 功率因数>0.95
- Efficiency>92%; Power factor>0.95
- 5年质保
- 5 years warranty
- Ta, Tc: 45°C/ 85°C
- Ta, Tc: 45°C/ 85°C

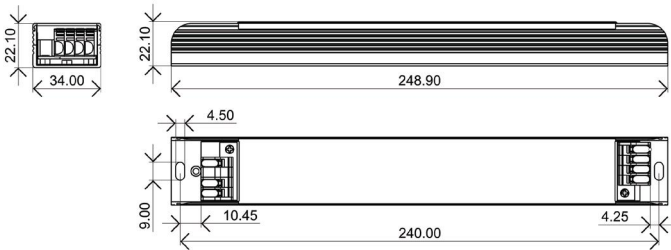


| Model<br>型号      | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| MS-150-48 LX-YX1 | 150W        | 220-240VAC            | 0-3.125A               | 48V                    | 92%              | 0.95                 | 249*34*22mm        |

恒压系列

超薄

- 可适配I/ II类灯具
- For luminaire of protection class II
- 隔离/安全低电压/独立式
- Isolated/ SELV/ Independent
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 效率>93%; 功率因数>0.95
- Efficiency>93%; Power factor>0.95
- 5年质保
- 5 years warranty
- Ta, Tc: 45°C/ 85°C
- Ta, Tc: 45°C/ 85°C

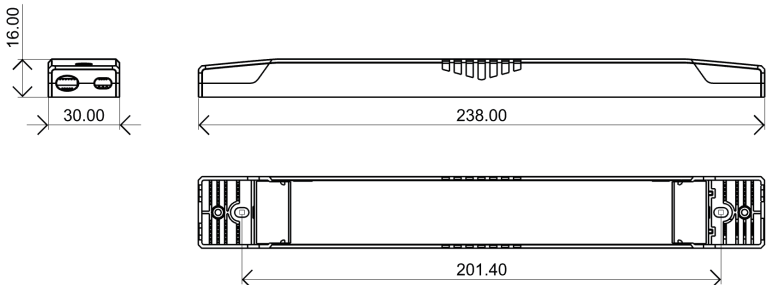

| Model<br>型号      | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| US-30-12 LI EXC  | 30W         | 220-240VAC            | 0-2.5A                 | 12V                    | 88%              | 0.95                 | 238*30*16mm        |
| US-30-24 LI EXC  | 30W         | 220-240VAC            | 0-1.25A                | 24V                    | 88%              | 0.95                 | 238*30*16mm        |
| US-60-12 LI EXC  | 60W         | 220-240VAC            | 0-5A                   | 12V                    | 88%              | 0.95                 | 298*30*16mm        |
| US-60-24 LI EXC  | 60W         | 220-240VAC            | 0-2.5A                 | 24V                    | 88%              | 0.95                 | 298*30*16mm        |
| US-100-12 LI EXC | 100W        | 220-240VAC            | 0-8.33A                | 12V                    | 90%              | 0.95                 | 353*30*18mm        |
| US-100-24 LI EXC | 100W        | 220-240VAC            | 0-4.17A                | 24V                    | 90%              | 0.95                 | 353*30*18mm        |
| US-150-24 LI EXC | 150W        | 220-240VAC            | 0-6.25A                | 24V                    | 93%              | 0.95                 | 353*30*18mm        |
| US-150-48 LI EXC | 150W        | 220-240VAC            | 0-3.13A                | 48V                    | 93%              | 0.95                 | 353*30*18mm        |
| US-200-24 LI EXC | 200W        | 220-240VAC            | 0-8.33A                | 24V                    | 93%              | 0.95                 | 383*30*18mm        |
| US-200-48 LI EXC | 200W        | 220-240VAC            | 0-4.17A                | 48V                    | 93%              | 0.95                 | 383*30*18mm        |

恒压系列


超薄

- 可适配I/ II类灯具
- For luminaire of protection class II
- 隔离/安全低电压/独立式
- Isolated/ SELV/ Independent

- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 效率>93%; 功率因数>0.95
- Efficiency>93%; Power factor>0.95

- 5年质保
- 5 years warranty

- Ta, Tc: 45°C/ 85°C
- Ta, Tc: 45°C/ 85°C

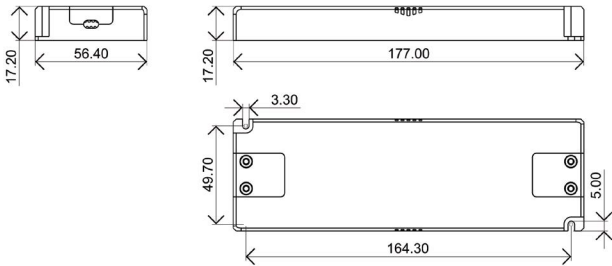

| Model<br>型号        | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|--------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| US-30-12 LI EXC S  | 30W         | 220-240VAC            | 0-2.5A                 | 12V                    | 88%              | 0.95                 | 154*50*14mm        |
| US-30-24 LI EXC S  | 30W         | 220-240VAC            | 0-1.25A                | 24V                    | 88%              | 0.95                 | 154*50*14mm        |
| US-60-12 LI EXC S  | 60W         | 220-240VAC            | 0-5A                   | 12V                    | 91%              | 0.95                 | 154*50*14mm        |
| US-60-24 LI EXC S  | 60W         | 220-240VAC            | 0-2.5A                 | 24V                    | 88%              | 0.95                 | 154*50*14mm        |
| US-75-12 LI EXC S  | 75W         | 220-240VAC            | 0-6.25A                | 12V                    | 89%              | 0.95                 | 174*50*14.8mm      |
| US-75-24 LI EXC S  | 75W         | 220-240VAC            | 0-3.125A               | 24V                    | 89%              | 0.95                 | 174*50*14.8mm      |
| US-100-12 LI EXC S | 100W        | 220-240VAC            | 0-8.33A                | 12V                    | 91%              | 0.95                 | 177*56.4*17.2mm    |
| US-100-24 LI EXC S | 100W        | 220-240VAC            | 0-4.16A                | 24V                    | 91%              | 0.95                 | 177*56.4*17.2mm    |
| US-150-12 LI EXC S | 150W        | 220-240VAC            | 0-11A                  | 12V                    | 92%              | 0.95                 | 177*56.4*17.2mm    |
| US-150-24 LI EXC S | 150W        | 220-240VAC            | 0-6.25A                | 24V                    | 93%              | 0.95                 | 177*56.4*17.2mm    |

恒压系列



带引线

- 可适配I/ II类灯具
- For luminaire of protection class II
- 隔离/安全低电压/独立式
- Isolated/ SELV/ Independent

- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 效率>87%; 功率因数>0.95
- Efficiency>87%; Power factor>0.95

- 5年质保
- 5 years warranty


- Ta, Tc: 45°C/ 85°C
- Ta, Tc: 45°C/ 85°C

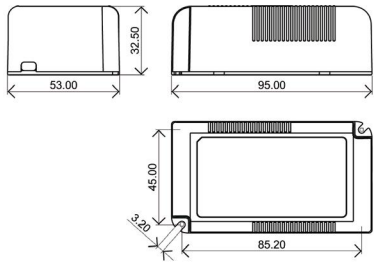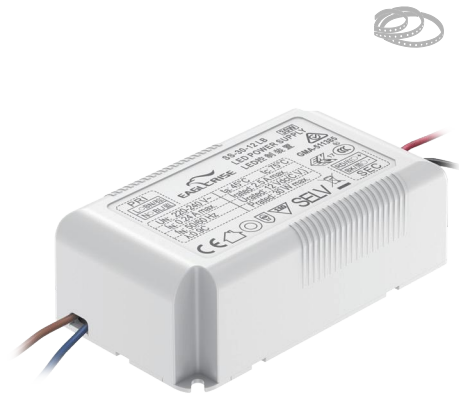

| Model<br>型号 | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|-------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| SS-30-12 LB | 30W         | 220-240VAC            | 0-2.75A                | 12V                    | 85%              | 0.95                 | 95*53*23.2mm       |
| SS-30-12 LB | 30W         | 220-240VAC            | 0-1.25A                | 24V                    | 85%              | 0.95                 | 95*53*23.2mm       |
| SS-45-12 LB | 45W         | 220-240VAC            | 0-3.75A                | 12V                    | 85%              | 0.95                 | 95*53*23.2mm       |
| SS-45-12 LB | 45W         | 220-240VAC            | 0-1.88A                | 24V                    | 85%              | 0.95                 | 95*53*23.2mm       |
| SS-60-24 LB | 60W         | 220-240VAC            | 0-2.5A                 | 24V                    | 87%              | 0.95                 | 110.5*59.5*32.5mm  |

恒压系列  
IP67

- 可适配I/ II类灯具
- For luminaire of protection class II
- 隔离/安全低电压/独立式
- Isolated/ SELV/ Independent
- 输入电压 220-240VAC
- Input voltage: 220-240VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 效率>92%; 功率因数>0.95
- Efficiency>92%; Power factor>0.95
- 5年质保
- 5 years warranty
- Ta, Tc: 45°C/ 80°C
- Ta, Tc: 45°C/ 80°C

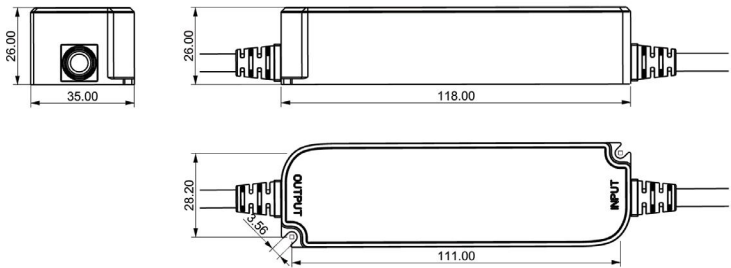


| Model<br>型号       | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|-------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| VTS-24-12 IP67 L  | 24W         | 220-240VAC            | 0-2A                   | 12V                    | 86%              | 0.95                 | 118*35*26mm        |
| VTS-24-24 IP67 L  | 24W         | 220-240VAC            | 0-1A                   | 24V                    | 86%              | 0.95                 | 118*35*26mm        |
| VTS-40-12 IP67 L  | 40W         | 220-240VAC            | 0-3.34A                | 12V                    | 86%              | 0.95                 | 148*42*30mm        |
| VTS-40-24 IP67 L  | 40W         | 220-240VAC            | 0-1.67A                | 24V                    | 88%              | 0.95                 | 148*42*30mm        |
| VTS-60-12 IP67 L  | 60W         | 220-240VAC            | 0-5A                   | 12V                    | 86.5%            | 0.95                 | 162*42*32mm        |
| VTS-60-24 IP67 L  | 60W         | 220-240VAC            | 0-2.5A                 | 24V                    | 89%              | 0.95                 | 162*42*32mm        |
| VTS-100-12 IP67 L | 100W        | 220-240VAC            | 0-8.33A                | 12V                    | 87%              | 0.95                 | 190*52*33mm        |
| VTS-100-24 IP67 L | 100W        | 220-240VAC            | 0-4.17A                | 24V                    | 89%              | 0.95                 | 190*52*33mm        |
| VTS-160-12 IP67 L | 160W        | 220-240VAC            | 0-13.3A                | 12V                    | 91%              | 0.95                 | 190*52*37.5mm      |
| VTS-160-24 IP67 L | 160W        | 220-240VAC            | 0-6.67A                | 24V                    | 92%              | 0.95                 | 190*52*37.5mm      |
| VTS-160-48 IP67 L | 160W        | 220-240VAC            | 0-3.33A                | 48V                    | 92%              | 0.95                 | 190*52*37.5mm      |

美规系列  
LED DRIVER  
NORTH AMERICAN SERIES

美规系列

0-10V+可控硅

- 可适配I/ II类灯具
- For luminaire of protection class I and class II
- 隔离/安全低电压/独立式
- Isolated/ SELV/ Independent
- 输入电压 120-277VAC
- Input voltage: 120-277VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 效率>85%; 功率因数>0.9
- Efficiency>85%; Power factor>0.95
- 5年质保
- 5 years warranty
- Ta, Tc: 45°C/ 80°C
- Ta, Tc: 45°C/ 80°C


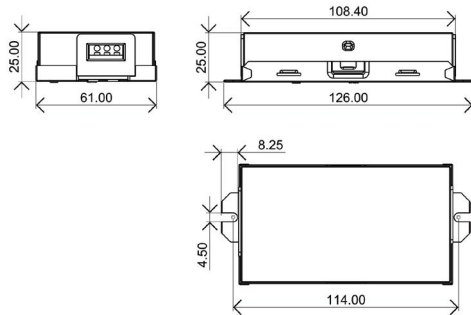


| Model<br>型号                 | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|-----------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FMW-30-750 0-10 TRIAC LD-S  | 30W         | 120-277VAC            | 350-750mA              | 27-42V                 | 85%              | 0.9                  | 108.4*61*25mm      |
| FMW-50-1250 0-10 TRIAC LD-S | 50W         | 120-277VAC            | 750-1250mA             | 27-42V                 | 85%              | 0.9                  | 108.4*61*25mm      |

美规系列

0-10V+NFC


- 可适配I/ II类灯具
- For luminaire of protection class I and class II
- 隔离/安全低电压/独立式
- Isolated/ SELV/ Independent
- 输入电压 120-277VAC
- Input voltage: 120-277VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP
- 效率>85%; 功率因数>0.9
- Efficiency>85%; Power factor>0.95
- 5年质保
- 5 years warranty
- Ta, Tc: 45°C/ 80°C
- Ta, Tc: 45°C/ 80°C
- LD：拨码调节输出电流；LN版：NFC调节输出电流
- LD: output current adjusted via DIP-switch; LN: output current adjusted via NFC

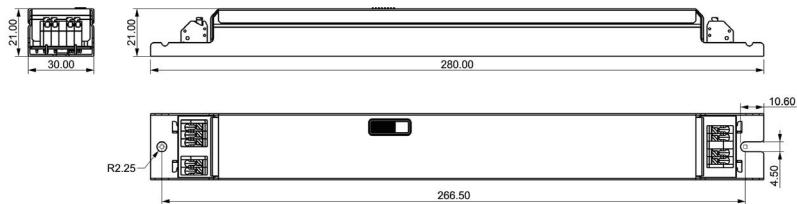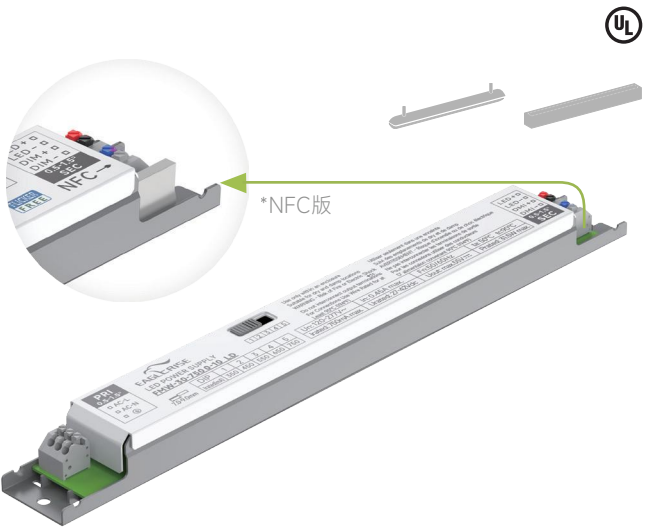

| Model<br>型号         | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|---------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| FMW-30-750 0-10 LD  | 30W         | 120-277VAC            | 350-750mA              | 27-42V                 | 85%              | 0.9                  | 280*30*21mm        |
| FMW-30-750 0-10 LN  | 30W         | 120-277VAC            | 350-750mA              | 27-42V                 | 85%              | 0.9                  | 280*30*21mm        |
| FMW-50-1250 0-10 LD | 50W         | 120-277VAC            | 750-1250mA             | 27-42V                 | 85%              | 0.9                  | 280*30*21mm        |
| FMW-50-1250 0-10 LN | 50W         | 120-277VAC            | 750-1250mA             | 27-42V                 | 85%              | 0.9                  | 280*30*21mm        |


配件系列

LED DRIVER  
ACCESSORIES SERIES

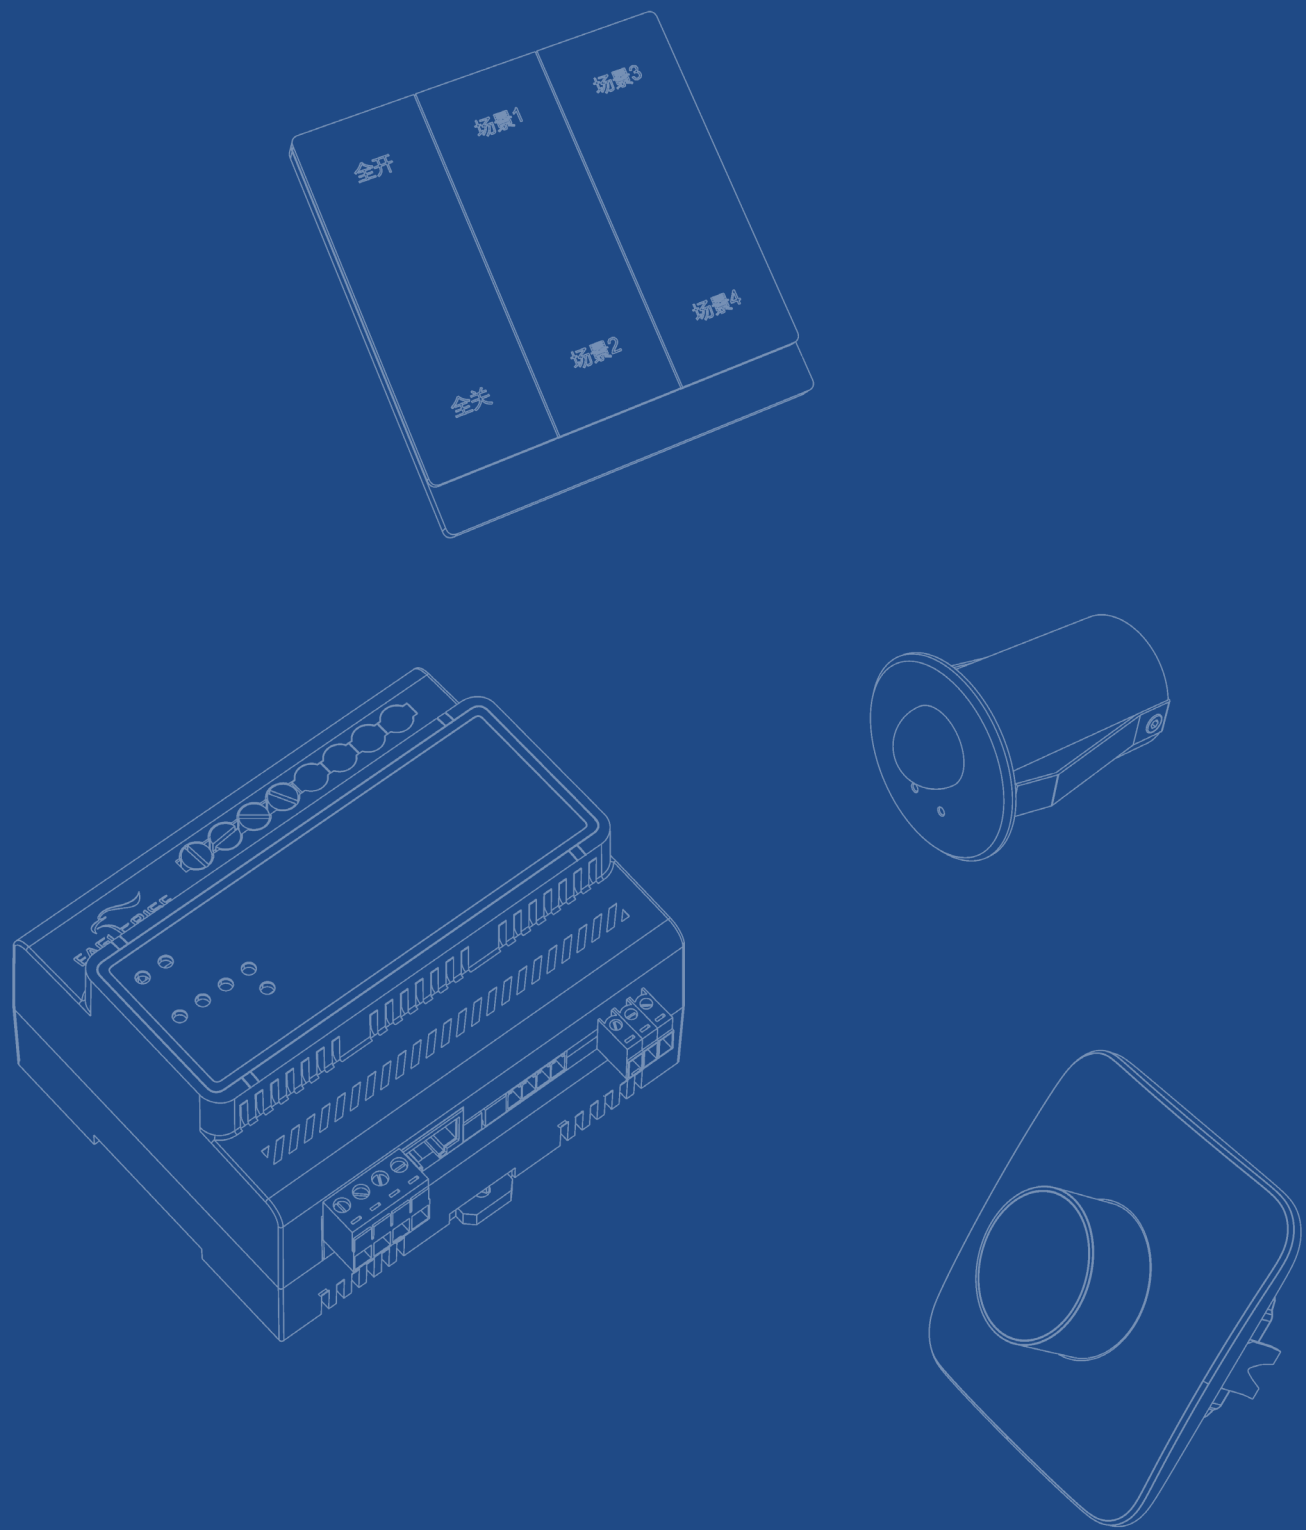

配件系列  
DALI网关

- 输入电压范围：22-26VDC；最大输出电流：250mA\*2
- Input voltage range: 22-26VDC; Output current: 250mA\*2, Max
- 35毫米DIN导轨安装方式，适用于6P配电箱
- 35mm DIN rail mounting for electrical distribution boxes (6P)
- 集成两路DALI总线电源
- Intergrated with 2-channel DALI bus power supply
- 支持交叉总线供电设备内部链接
- Supports cross-bus power device interlinking
- 支持离线故障排除，支持APP控制
- Enables offline debugging and control via mobile app
- 适用于RS485系统集成
- Compatible with RS485 system integration
- 适用于CAN总线系统集成
- Compatible with CAN bus system integration

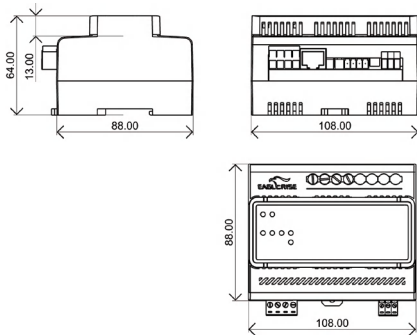


| Model<br>型号       | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|-------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| ER-GW-DALI-2 02-A | 5W          | 24V                   | 250mA*2                | 16V*2                  | /                | /                    | 108*64*88mm        |

配件系列

DALI调光器

- 适用于DALI标准协议IEC 62386
  - Adopts the DALI standard protocol IEC 62386
- 集成内置总线电源
  - Integrates built-in bus power supply
- 支持亮度及色温记忆功能
  - Supports brightness and color temperature memory
- 最小亮度及色温范围可调
  - Adjustable minimum brightness and color temperature range
- 支持DALI广播模式，无需调试
  - DALI broadcast mode available, no commissioning required

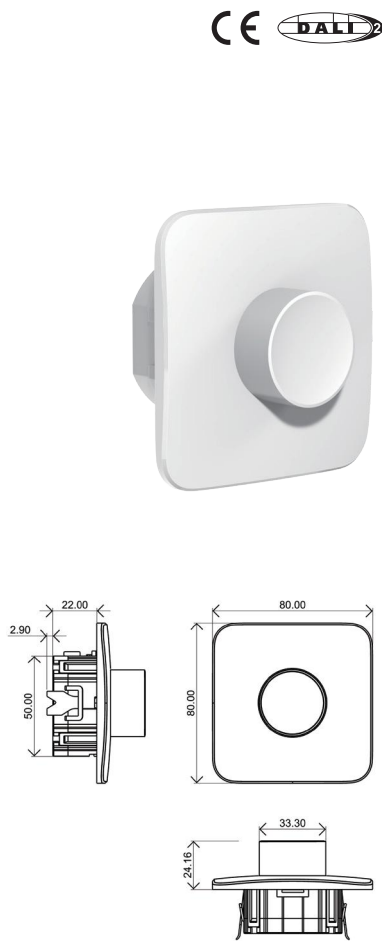


| Model<br>型号             | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|-------------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| ER-T-DALI-2 DT8 JQ-01 A | 0.8W        | 16V                   | 50mA                   | 16V                    | /                | /                    | 80*80*28mm         |

配件系列

DALI面板

- 兼容所有DALI-2认证应用控制器
  - Compatible with all DALI-2 certified application controllers
- 支持“IEC 62386-332反馈”功能
  - Supports “IEC 62386-332” function
- DALI-2总线供能
  - Powered via DALI-2 bus
- 白、灰、金三色可选
  - Available in 3 colors: white, gray and gold
- 支持六种场景控制
  - Support control of 6 scenarios

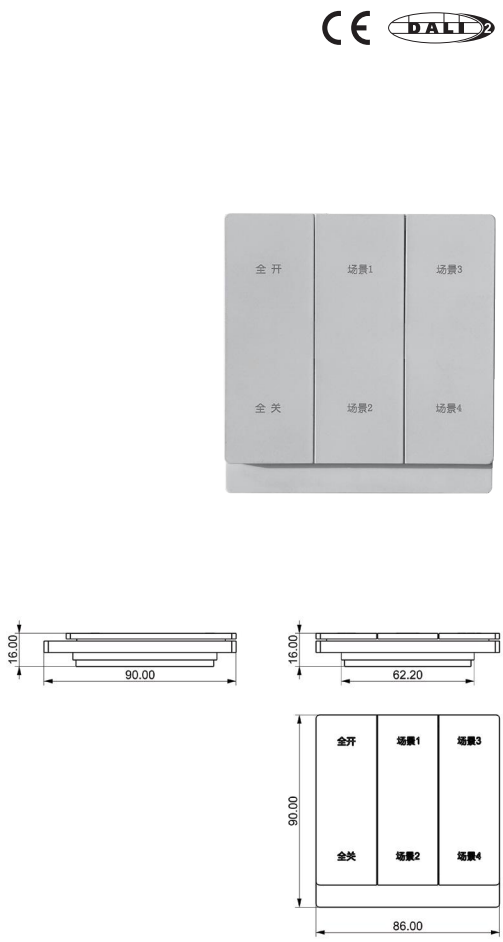

| Model<br>型号       | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|-------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| ER-SP-DALI-2 06-A | /           | 16V                   | /                      | /                      | /                | /                    | 86*86*38mm         |

配件系列

DALI传感器

- 亮度检测范围：0~1024 lux
- Illuminance sensing supports 0~1024 lux
- 温度检测范围：-40~51°C
- Temperature sensing supports -40~51°C
- 湿度检测范围：0~100% RH
- Humidity sensing supports 0~100% RH
- DALI-2总线供电
- Powered via DALI-2 bus
- 紧凑型设计，适用于狭小空间安装
- Compact size, suitable for installation in tight spaces




| Model<br>型号       | Power<br>功率 | Input Voltage<br>输入电压 | Output Current<br>输出电流 | Output Voltage<br>输出电压 | Efficiency<br>效率 | Power Factor<br>功率因数 | Size (L*W*H)<br>尺寸 |
|-------------------|-------------|-----------------------|------------------------|------------------------|------------------|----------------------|--------------------|
| ER-BS-DALI-2 01-A | /           | 16V                   | /                      | /                      | /                | /                    | Φ38*46.3mm         |

可选配件（需额外订购）

Optional Accessories (Require Additional Order)

侧盖 (Side cap)


| 编码<br>Product Code | 描述<br>Description                                   | 使用机型<br>Suitable for                                                                                                                                                                                                                                                                                          |
|--------------------|-----------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 132021T0197P1      | Side Cap Set(Small, Grey, with "Don't Cover" mark)  | FLS-30-700 DALI-2LD ECO   FLS-24-550 LD ECO<br>FLS-44-1050 DALI-2 LD ECO   FLS-30-700 LD ECO<br>FLS-30-700 DALI-2 LD2   FLS-38-900 LD ECO<br>FLS-44-1050 DALI-2 LD2   FLS-42-1050 LD ECO<br>FLS-30-700 DALI-2 LD ADV   FLS-42-1050 DALI-2 LD<br>FLS-42-1050 Blue LD-CSB ADV<br>FLX-42-1050 DALI-2 0-10 LN PRO |
| 132021T0181P1      | Side Cap Set(Small, White, with "Don't Cover" mark) |                                                                                                                                                                                                                                                                                                               |
| 1270100280         | Screws for Side Cap( Small)                         |                                                                                                                                                                                                                                                                                                               |
| 132021T0033P1-1    | Side Cap(Bottom, Big, White)                        |                                                                                                                                                                                                                                                                                                               |
| 132021T0034P1-2    | Side Cap(Top, Big, Grey)                            |                                                                                                                                                                                                                                                                                                               |
| 132021T0079P1-2    | Side Cap(Top, Big, White)                           |                                                                                                                                                                                                                                                                                                               |
| 126016T0009        | 5P Terminal for Big Side Cap                        |                                                                                                                                                                                                                                                                                                               |
| 132038T0046P1      | Crimp Plate for Big Side Cap                        |                                                                                                                                                                                                                                                                                                               |
| 1290030208         | Terminal block special lead for large side cover    |                                                                                                                                                                                                                                                                                                               |

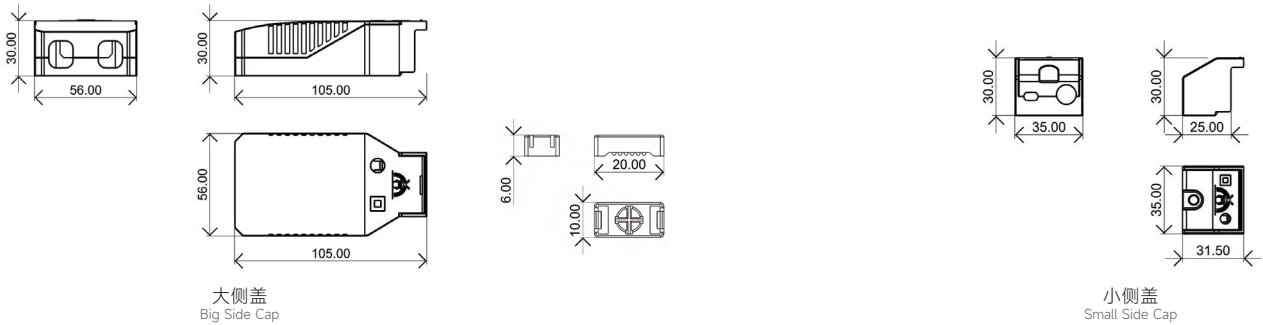


| 编码<br>Product Code | 描述<br>Description                                                        | 使用机型<br>Suitable for                                                                                                                                                                           |
|--------------------|--------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 132021T0198P1      | Side Cap(Top, Grey, without "Don't Cover" mark)+ Side Cap(Bottom, White) | FLS-30-700 DALI-2 LD PRO<br>FLS-30-700 DALI-2 LN PRO<br>FLS-42-1050 DALI-2 LD PRO<br>FLS-42-1050 LD PRO<br>FLS-42-10050 LD1 PRO<br>FLS-42-1050 DALI-2 DT8 LN PRO<br>FLS-42-1050 DALI-2 LD1 ADV |
| 132021T0198P1-1    | Side Cap (Top, Grey, with "Don't Cover" mark)+ Side Cap(Bottom, White)   |                                                                                                                                                                                                |
| 132021T0198P1-3    | Side Cap (Top, White, with "Don't Cover" mark)+ Side Cap(Bottom, White)  |                                                                                                                                                                                                |
| 1270100280         | Screws for Small Side Cap                                                |                                                                                                                                                                                                |
| 132021T0209P1      | Big Side Cap Set(Top, Grey Side Cap and Bottom, White Side Cap)          |                                                                                                                                                                                                |
| 132021T0209P1-2    | Big Side Cap Set(Top, White Side Cap and Bottom, White Side Cap)         |                                                                                                                                                                                                |
| 1270100280         | Screws for Big Side Cap                                                  |                                                                                                                                                                                                |
| 126016T0009        | 5P Terminal for Big Side Cap                                             |                                                                                                                                                                                                |
| 1290030208         | Terminal block special lead for large side cover                         |                                                                                                                                                                                                |



| 编码<br>Product Code | 描述<br>Description                                  | 使用机型<br>Suitable for                                                                                                                         |
|--------------------|----------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| 132021T0256        | Side Cap Set(Small , Grey with "Don't Cover" mark) | FLS-20-500 DALI-2 LD PRO<br>FLS-20-500 DAL-2 LN PRO<br>FLS-21-500 LD1 EXC<br>FLS-30-700 LD1 EXC<br>FLS-38-900 LD1 EXC<br>FLS-40-1050 LD1 EXC |
| 1270100280         | Screws for Small Side Cap                          |                                                                                                                                              |






| 编码<br>Product Code | 描述<br>Description | 使用机型<br>Suitable for                                                                                                                                                                                                                                        |
|--------------------|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 132021T0141-1      | Side Cap (Grey)   | MS-30-24 DALI-2 LI<br>MS-60-24 DALI-2 LI<br>MS-100-24 DALI-2 LI<br>FMS-35-700 DALI-2 LD<br>FMS-50-1050 DALI2 LD<br>FMS-75-1800 DALI2 LD<br>FMS-35-350 N-S DALI-2 LD<br>FMS-75-500 N-S DALI-2 LD<br>FMS-100-1050 N-S DALI-2 LD<br>FMS-150-1050 N-S DALI-2 LD |



牙节 (Nipples)

| 编码<br>Product Code | 描述<br>Description   | 使用机型<br>Suitable for                                                                                                            |
|--------------------|---------------------|---------------------------------------------------------------------------------------------------------------------------------|
| 1350231200-1       | 材质：车削铝<br>尺寸：M10*8  | FDS-12-350 DALI-2 LD<br>FDS-30-700 DALI-2 LD<br>FDS-40-1050 DALI-2 LD<br>FDS-42-1050 DALI-2 LD PRO<br>FDS-42-1050 DALI-2 LD ADV |
| 135053T0008        | 材质：锌合金<br>尺寸：M10*10 | FDS-12-350 LD2<br>FDS-21-500 LD2<br>FDS-30-700 LD2                                                                              |
| 135053T0008-1      | 材质：锌合金<br>尺寸：M10*8  | FDS-12-350 LD2<br>FDS-21-500 LD2<br>FDS-30-700 LD2                                                                              |



应用程序 (APP)

适用于：  
Suitable for:

FMS-35-350 N-S DALI-2 LN  
FMS-75-600 N-S DALI-2 LN  
FMS-100-700 N-S DALI-2 LN  
FMS-150-800 N-S DALI-2 LN  
FMS-35-350 N-S DALI-2 LN1  
FMS-100-700 N-S DALI-2 LN1  
FMS-75-500 N-S DALI-2 LN EXC  
FMS-150-1200 N-S DALI-2 LN EXC

FMS-75-600 N-S DALI-2 LN1  
FMS-35-350 N-S DALI-2 LN EXC  
FMS-100-1050 N-S DALI-2 LN EXC  
FMS-35-350 N-S LN  
FMS-75-600 N-S LN  
FMS-100-700 N-S LN  
FMS-150-800 N-S LN

Android



IOS



新旧产品替换表

Old Product Replacement Table

|                   | 系列<br>Series           | 系列名称<br>Series Name | 旧版本<br>Old Version        | 新版本<br>New Version             |
|-------------------|------------------------|---------------------|---------------------------|--------------------------------|
| 智能<br>Intelligent | 迷你<br>Mini             | DT8                 | FLS-26-700 DALI-2-DT8 LD  | FLS-26-700 DALI-2-DT8 LD       |
|                   |                        |                     | FLS-44-1050 DALI-2-DT8 LD | FLS-30-700 DALI-2 LD PRO       |
|                   | 紧凑型<br>Compact         | Blue                | LS-8-XXX Blue LI-MJ       | LS-8-XXX Blue SI-MJ            |
|                   |                        |                     | LS-12-XXX Blue LI-MJ      | LS-12-XXX Blue SI-MJ           |
|                   |                        | DT6                 | LS-45-24 DALI-2 LI        | LS-45-24 DALI-2 LI1            |
|                   |                        |                     | LS-80-24 DALI-2 LI        | LS-80-24 DALI-2 LI1            |
|                   |                        |                     | LS-150-24 DALI-2 LI       | LS-150-24 DALI-2 LI1           |
|                   | 线性<br>Linear           | DT6                 | FMS-35-350 N-S DALI-2 LN  | FMS-35-350 N-S DALI-2 LN EXC   |
|                   |                        |                     | FMS-75-600 N-S DALI-2 LN  | FMS-75-500 N-S DALI-2 LN EXC   |
|                   |                        |                     | FMS-100-700 N-S DALI-2 LN | FMS-100-1050 N-S DALI-2 LN EXC |
|                   |                        |                     | FMS-100-800 N-S DALI-2 LN | FMS-100-1050 N-S DALI-2 LN EXC |
|                   | 导轨<br>Track            | DT6                 | FDS-12-350 DALI2 LD       | FDS-42-1050 DALI-2 LD PRO      |
|                   |                        |                     | FDS-30-700 DALI2 LD       | FDS-42-1050 DALI-2 LD PRO      |
|                   |                        |                     | FDS-40-1050 DALI2 LD      | FDS-42-1050 DALI-2 LD PRO      |
| 调光<br>Dimming     | 恒流<br>Constant Current | 0-10V               | FLS-15-350 0-10 LA        | FLS-20-500 0-10 LD ADV         |
|                   |                        |                     | FLS-25-600 0-10 LA        | FLS-32-700 0-10 LD ADV         |
|                   |                        |                     | FLS-44-1050 0-10 LA       | FLS-42-1050 0-10 LD ADV        |
|                   |                        |                     | FLS-60-1700 0-10 LA       | FLS-60-1500 0-10 LD ADV        |
|                   |                        | Triac               | LS-6-XXX TRIAC LI         | LS-8-XXX TRIAC LI1             |
|                   |                        |                     | LS-9-XXX TRIAC LI         | LS-8-XXX TRIAC LI1             |
|                   |                        |                     | LS-12-XXX TRIAC LI        | LS-15-XXX TRIAC LI1            |
|                   |                        |                     | LS-20-XXX TRIAC LI        | LS-20-XXX TRIAC LI1            |
|                   |                        |                     | LS-30-XXX TRIAC LI        | LS-30-XXX TRIAC LI1            |
|                   |                        |                     | LS-40-XXX TRIAC LI        | LS-40-XXX TRIAC LI1            |
| 常规<br>Common      | 恒流<br>Constant Current | Mini                | FLS-42-1050 LD ADV        | FLS-42-1050 LD1 ADV            |
|                   |                        | Linear              | FMS-20-350 N-S LD1 E      | FMS-20-350 N-S LD2 E           |
|                   |                        |                     | FMS-40-350 N-S LD1 E      | FMS-40-350 N-S LD2 E           |
|                   |                        |                     | FMS-60-350 N-S LD1 E      | FMS-60-350 N-S LD2 E           |
|                   |                        |                     | FMS-80-350 N-S LD1 E      | FMS-80-350 N-S LD2 E           |
|                   |                        | High Power Factor   | LS-8-XXX LI1 EXC          | LS-8-XXX LI2 EXC               |
|                   |                        |                     | LS-12-XXX LI1 EXC         | LS-12-XXX LI2 EXC              |
|                   |                        |                     | LS-21-XXX LI1 EXC         | LS-21-XXX LI2 EXC              |
|                   |                        |                     | LS-40-XXX LI EXC S        | LS-40-XXX LI1 EXC S            |
|                   |                        | Track               | FDS-42-1050 LD PRO        | FDS-40-1050 LD2 PRO            |
|                   |                        |                     | FDS-42-1050 CCT LD        | FDS-40-1050 CCT LD2 PRO        |
|                   | 恒压<br>Constant Voltage | Common              | SS-6-XX MB                | LS-8-XX SI                     |
|                   |                        |                     | SS-12-XX MB               | LS-12-XX SI                    |
|                   |                        |                     | SS-18-XX MB               | LS-18-XX SI                    |