

OSRAM LED DRIVERS CATALOGUE

联系我们：

电话：+86 757 8625 6767

邮箱：osram-led-drivers@eaglerise.com

英文网址：https://lighting.eaglerise.com/osram-drivers

服务商：

吉安伊戈尔电气有限公司

网址：www.lighting-eaglerise.com

伊戈尔是欧司朗品牌 LED 驱动器的授权生产销售方。

欧司朗为OSRAM GmbH的注册商标。

Service contact:

Eaglerise Electric & Electronic (JI AN) Co., Ltd.

Website: https://lighting.eaglerise.com

Eaglerise is a licensee of the OSRAM brand for LED drivers.

OSRAM is a trademark of OSRAM GmbH.

V2026.06



公众号
WeChat




视频号
WeChat Channel

欧司朗LED驱动器产品图册
OSRAM LED Drivers Catalogue
2026


OSRAM
LED Drivers

命名规则	Naming Rules	2
产品选型表	Product Overview	3
ITS DALI-2 CS系列	ITS DALI-2 CS Series	5
ITS FIX CS系列	ITS FIX CS Series	6
ITS FIX TRACK HE系列	ITS FIX TRACK HE Series	7
ITS FIX Linear系列	ITS FIX Linear Series	8
ITS FIX CV系列	ITS FIX CV Series	9
EMS High PF系列	EMS High PF Series	10
EMS LPF系列	EMS LPF Series	12
配件表	Accessories	13

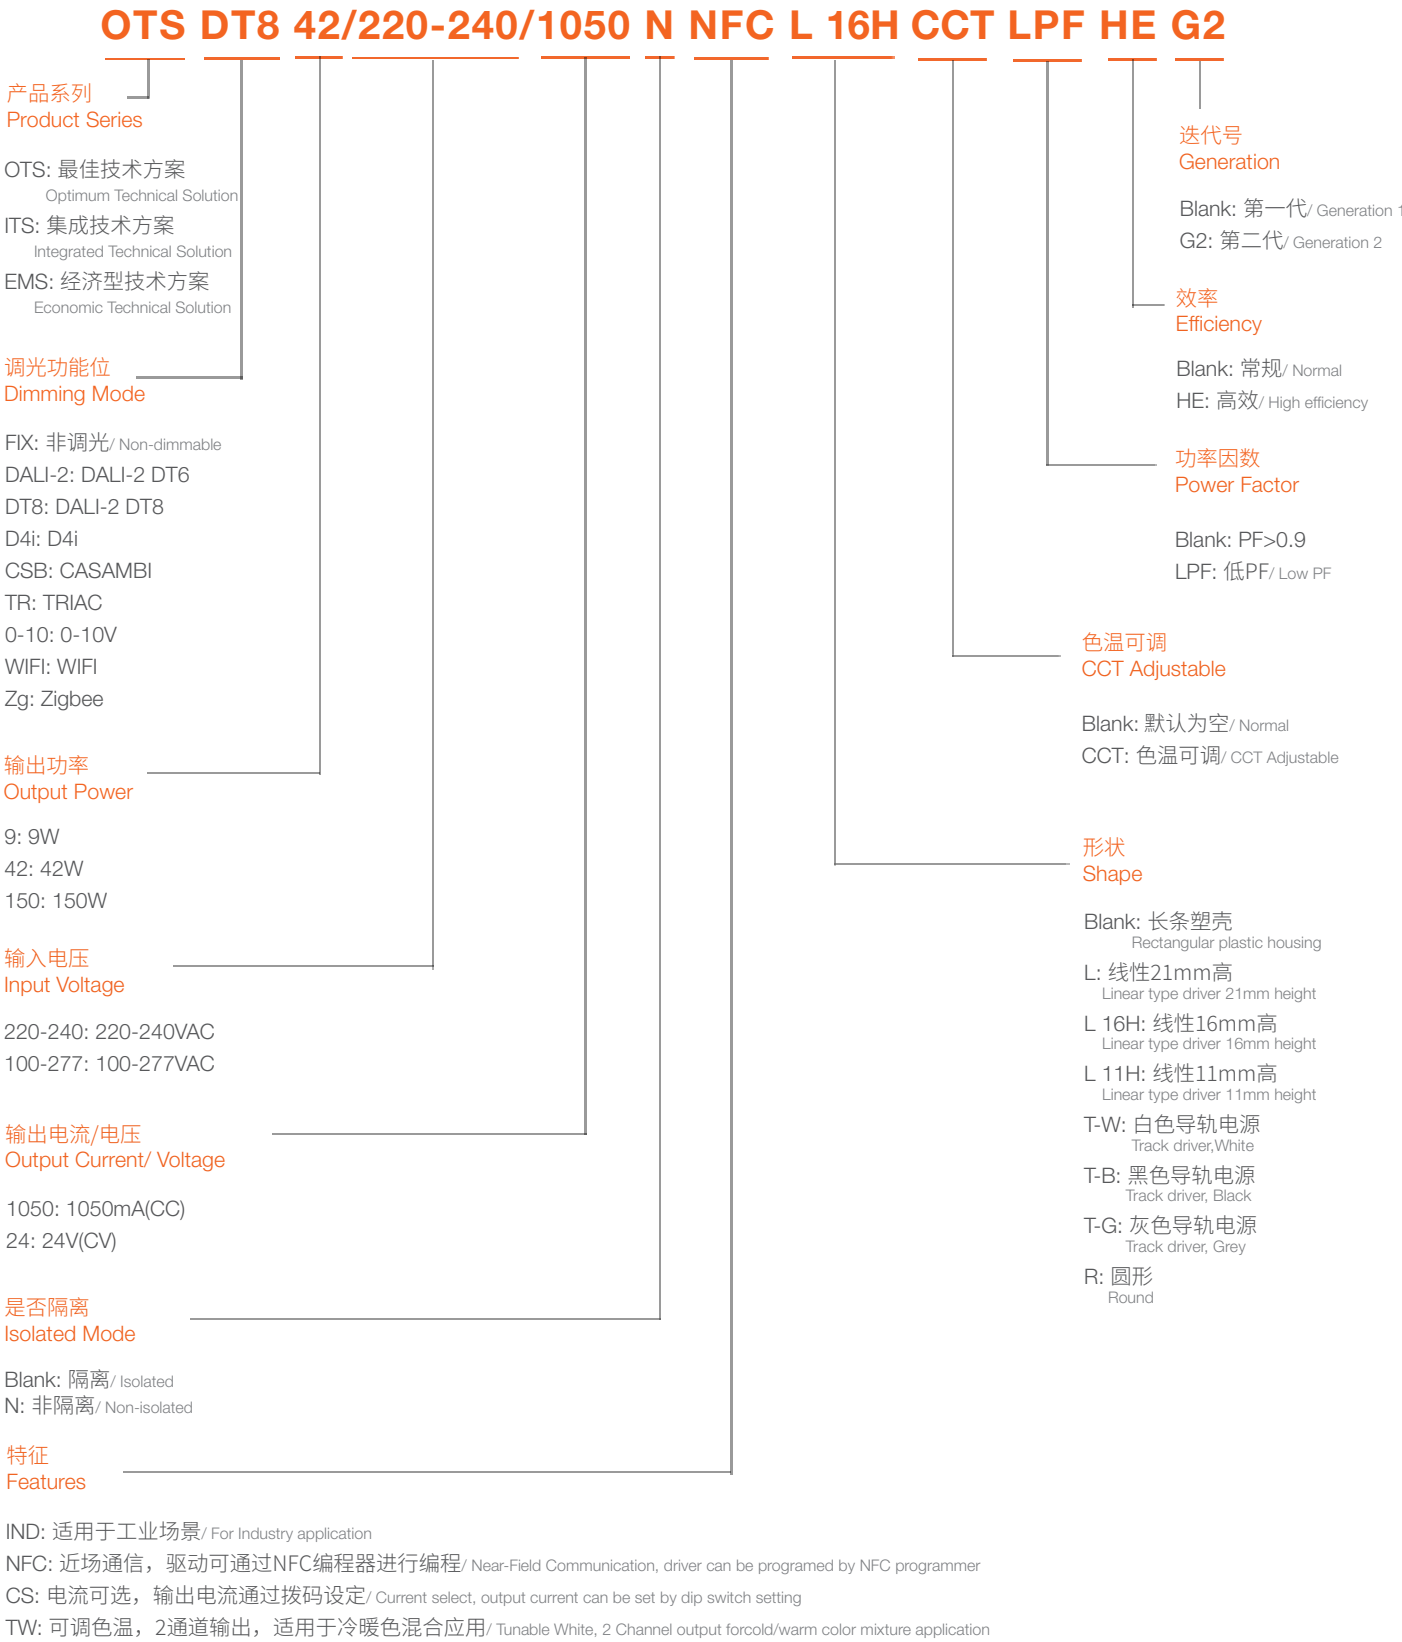

ITS DALI-2 CS系列
ITS DALI-2 CS Series

- 可适配I类或II类灯具
· For luminaire of protection class I or II
- 隔离/安全低电压/内置式/独立式（带侧盖时）
· Isolated / SELV / Built-in / Independent (With side caps)
- 输入电压 220-240VAC
· Input Voltage 220-240 VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
· Protections: SCP/ OLP/ OVP/ OTP
- 恒流明功能
· CLO Integrated
- 效率高达90%
· Efficiency up to 90%
- 拨码调节输出电流
· Adjustable output current with DIP-switch
- 适用于应急照明，符合EN 50172
· Suitable for emergency lighting acc. to EN 50172
- EOFi=15%
· EOFi=15%
- 5年质保
· 5 years warranty
- Ta: 50°C
· Ta: 50°C
- 含DALI协议251、252、253
· DALI maintainace (Parts 251, 252, 253)
- 3m/ 10m EMI
· 3m/ 10m EMI
- 25mm高
· 25mm height
- 浪涌保护：2kV
· Surge: 2kV

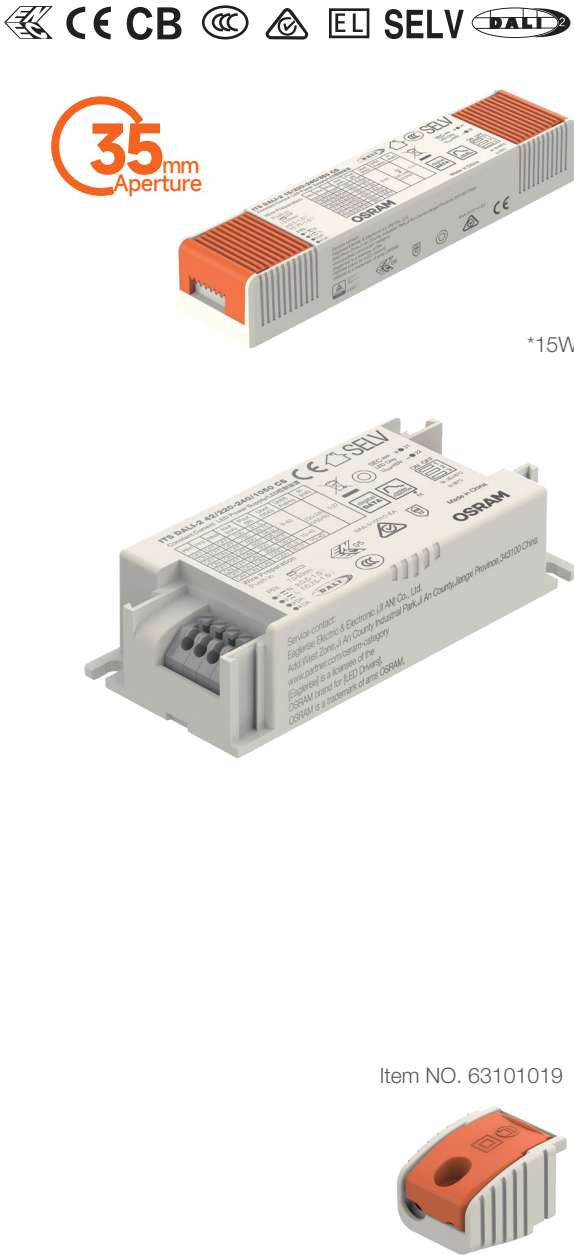

型号 Model	I/N码 Item NO.	功率 Power	输入电压 Input Voltage	输出电流 Output Current	输出电压 Output Voltage	效率 Efficiency	功率因数 Power Factor	尺寸 Size (L*W*H)
ITS DALI-2 15/220-240/350 CS	61102019	15W	220-240VAC	100-350mA	9-42V	85%	0.95	130*29*21mm
ITS DALI-2 20/220-240/500 CS	61102029	20W	220-240VAC	150-500mA	10-45V	87%	0.95	97*43*25mm
ITS DALI-2 30/220-240/700 CS	61102039	30W	220-240VAC	350-700mA	10-45V	90%	0.95	97*43*25mm
ITS DALI-2 42/220-240/1050 CS	61102049	42W	220-240VAC	700-1050mA	10-45V	90%	0.95	97*43*25mm
ITS DALI-2 60/220-240/1500 CS	61102059	60W	220-240VAC	800-1500mA	15-48V	90%	0.95	113*43*25mm

ITS FIX CS系列
ITS FIX CS Series

- 可适配I类或II类灯具
· For luminaire of protection class I or II
- 隔离/安全低电压/内置式/独立式（带侧盖时）
· Isolated / SELV / Built-in / Independent (With side caps)
- 输入电压 220-240VAC
· Input Voltage 220-240 VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护
· Protections: SCP/ OLP/ OVP/ OTP
- 效率高达90%
· Efficiency up to 90%
- 拨码调节输出电流
· Adjustable output current with DIP-switch
- 适用于应急照明，符合EN 50172
· Suitable for emergency lighting acc. to EN 50172
- EOFi=100%
· EOFi=100%
- 5年质保
· 5 years warranty
- Ta: 50°C
· Ta: 50°C
- 浪涌保护：2kV
· Surge: 2kV
- 3m/ 10m EMI
· 3m/ 10m EMI
- 25mm高
· 25mm height



型号 Model	I/N码 Item NO.	功率 Power	输入电压 Input Voltage	输出电流 Output Current	输出电压 Output Voltage	效率 Efficiency	功率因数 Power Factor	尺寸 Size (L*W*H)
ITS FIX 20/220-240/500 CS	61101019	20W	220-240VAC	150-500mA	23-42V	88%	0.95	97*43*25mm
ITS FIX 30/220-240/700 CS	61101029	30W	220-240VAC	350-700mA	23-42V	88%	0.95	97*43*25mm
ITS FIX 42/220-240/1050 CS	61101039	42W	220-240VAC	700-1050mA	23-42V	90%	0.95	97*43*25mm
ITS FIX 60/220-240/1500 CS	61101049	60W	220-240VAC	800-1500mA	23-42V	90%	0.95	113*43*25mm

ITS FIX TRACK HE系列

ITS FIX TRACK HE Series

- 可适配II类灯具
- For luminaire of protection class II

- 隔离/安全低电压/独立式
- Isolated / SELV / Independent

- 输入电压 220-240VAC
- Input Voltage 220-240 VAC

- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP

- 黑白灰三色可选
- Available in black, white and grey

- 功率因数 0.95
- Power Factor 0.95

- 效率高达93%
- Efficiency up to 93%

- 拨码调节输出电流
- Adjustable output current with DIP-switch

- 适用于应急照明，符合EN 50172
- Suitable for emergency lighting acc. to EN 50172

- EOFi=100%
- EOFi=100%

- 5年质保
- 5 years warranty

- 浪涌保护：2kV
- Surge: 2kV

- 极致尺寸：133mm长
- Mini size: 133mm length

- Tc: 75°C
- Tc: 75°C

型号 Model	I/N码 Item NO.	功率 Power	输入电压 Input Voltage	输出电流 Output Current	输出电压 Output Voltage	效率 Efficiency	功率因数 Power Factor	尺寸 Size (L*W*H)
ITS FIX 12/220-240/300 CS T-W HE	(白/W) 61303019	12W	220-240VAC	150-300mA	27-40V	92%	0.95	133*31*42mm
ITS FIX 12/220-240/300 CS T-B HE	(黑/B) 61303018							
ITS FIX 12/220-240/300 CS T-G HE	(灰/G) 61303017							
ITS FIX 18/220-240/450 CS T-W HE	(白/W) 61303029	18W	220-240VAC	300-450mA	27-40V	92%	0.95	133*31*42mm
ITS FIX 18/220-240/450 CS T-B HE	(黑/B) 61303028							
ITS FIX 18/220-240/450 CS T-G HE	(灰/G) 61303027							
ITS FIX 26/220-240/650 CS T-W HE	(白/W) 61303039	26W	220-240VAC	500-650mA	27-40V	92%	0.95	133*31*42mm
ITS FIX 26/220-240/650 CS T-B HE	(黑/B) 61303038							
ITS FIX 26/220-240/650 CS T-G HE	(灰/G) 61303037							
ITS FIX 34/220-240/850 CS T-W HE	(白/W) 61303049	34W	220-240VAC	700-850mA	27-40V	93%	0.95	133*31*42mm
ITS FIX 34/220-240/850 CS T-B HE	(黑/B) 61303048							
ITS FIX 34/220-240/850 CS T-G HE	(灰/G) 61303047							
ITS FIX 42/220-240/1050 CS T-W HE	(白/W) 61303059	42W	220-240VAC	900-1050mA	27-40V	93%	0.95	133*31*42mm
ITS FIX 42/220-240/1050 CS T-B HE	(黑/B) 61303058							
ITS FIX 42/220-240/1050 CS T-G HE	(灰/G) 61303057							

ITS FIX Linear系列

ITS FIX Linear Series

- 可适配I类灯具
- For luminaire of protection class I

- 非隔离/内置式
- Non-Isolated / Built-in

- 输入电压 220-240VAC
- Input Voltage 220-240 VAC

- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP

- 功率因数 0.95
- Power Factor 0.95

- 效率高达95%
- Efficiency up to 95%

- 拨码调节输出电流
- Adjustable output current with DIP-switch

- 适用于应急照明，符合EN 50172
- Suitable for emergency lighting acc. to EN 50172

- EOFi=100%
- EOFi=100%

- 5年质保
- 5 years warranty

- 浪涌保护：2kV
- Surge: 2kV

- Tc: 85°C
- Tc: 85°C

型号 Model	I/N码 Item NO.	功率 Power	输入电压 Input Voltage	输出电流 Output Current	输出电压 Output Voltage	效率 Efficiency	功率因数 Power Factor	尺寸 Size (L*W*H)
ITS FIX 20/220-240/350 N CS L	61204019	20W	220-240VAC	200-350mA	25-100V	90%	0.9	168*30*21mm
ITS FIX 40/220-240/350 N CS L	61204029	40W	220-240VAC	200-350mA	40-200V	94%	0.95	168*30*21mm
ITS FIX 60/220-240/350 N CS L	61204039	60W	220-240VAC	200-350mA	90-200V	94%	0.95	210*30*21mm
ITS FIX 80/220-240/550 N CS L	61204049	80W	220-240VAC	200-550mA	90-216V	95%	0.95	210*30*21mm

ITS FIX Linear CCT系列

ITS FIX Linear CCT Series

- 可适配I类灯具

· For luminaire of protection class I
- 非隔离/内置式

· Non-Isolated / Built-in
- 输入电压 220-240VAC

· Input Voltage 220-240 VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护

· Protections: SCP/ OLP/ OVP/ OTP
- 功率因数 0.95

· Power Factor 0.95
- 效率高达95%

· Efficiency up to 95%
- 拨码调节输出电流

· Adjustable output current with DIP-switch
- 适用于应急照明，符合EN 50172

· Suitable for emergency lighting acc. to EN 50172
- EOFi=100%

· EOFi=100%
- 5年质保

· 5 years warranty
- 浪涌保护：2kV

· Surge: 2kV
- Tc: 85°C

· Tc: 85°C



型号 Model	I/N码 Item NO.	功率 Power	输入电压 Input Voltage	输出电流 Output Current	输出电压 Output Voltage	效率 Efficiency	功率因数 Power Factor	尺寸 Size (L*W*H)
ITS FIX 20/220-240/350 N CS L CCT	61204079	20W	220-240VAC	200-350mA	25-100V	90%	0.9	168*30*21mm
ITS FIX 40/220-240/350 N CS L CCT	61204089	40W	220-240VAC	200-350mA	40-200V	94%	0.95	168*30*21mm
ITS FIX 60/220-240/350 N CS L CCT	61204099	60W	220-240VAC	200-350mA	90-200V	94%	0.95	210*30*21mm
ITS FIX 80/220-240/550 N CS L CCT	61204109	80W	220-240VAC	200-550mA	90-216V	95%	0.95	210*30*21mm

ITS FIX CV系列

ITS FIX CV Series

- 可适配I类或II类灯具

· For luminaire of protection class I or II
- 隔离/安全低电压/独立式

· Isolated / SELV / Independent
- 输入电压 220-240VAC

· Input Voltage 220-240 VAC
- 多重保护：短路保护、过载保护、过压保护、过温保护

· Protections: SCP/ OLP/ OVP/ OTP
- 功率因数 0.95

· Power Factor 0.95
- 效率高达93%

· Efficiency up to 93%
- 适用于应急照明，符合EN 50172


· Suitable for emergency lighting acc. to EN 50172
- EOFi=100%

· EOFi=100%
- 5年质保

· 5 years warranty
- 浪涌保护：2kV

· Surge: 2kV
- Ta: 50°C

· Ta: 50°C

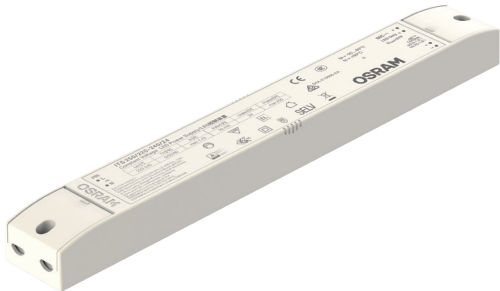

型号 Model	I/N码 Item NO.	功率 Power	输入电压 Input Voltage	输出电流 Output Current	输出电压 Output Voltage	效率 Efficiency	功率因数 Power Factor	尺寸 Size (L*W*H)
ITS FIX 30/220-240/12	62105019	30W	220-240VAC	0-2.5A	12V	85%	0.95	168*39*28mm
ITS FIX 30/220-240/24	62105029	30W	220-240VAC	0-1.25A	24V	85%	0.95	168*39*28mm
ITS FIX 60/220-240/12	62105039	60W	220-240VAC	0-5A	12V	89%	0.95	200*39*30mm
ITS FIX 60/220-240/24	62105049	60W	220-240VAC	0-2.5A	24V	89%	0.95	200*39*30mm
ITS FIX 120/220-240/12	62105059	120W	220-240VAC	0-10A	12V	91%	0.95	259*39*30mm
ITS FIX 120/220-240/24	62105069	120W	220-240VAC	0-5A	24V	93%	0.95	259*39*30mm
ITS FIX 180/220-240/24	62105079	180W	220-240VAC	0-7.5A	24V	93%	0.95	350*45*30mm
ITS FIX 250/220-240/24	62105089	250W	220-240VAC	0-10.416A	24V	93%	0.95	350*45*30mm

EMS High PF系列
EMS High PF Series

- 可适配I类或II类灯具
- For luminaire of protection class I or II

- 隔离/安全低电压/独立式
- Isolated / SELV / Independent

- 输入电压 220-240VAC
- Input Voltage 220-240 VAC


- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP

- 效率高达90%
- Efficiency up to 90%

- 5年质保
- 5 years warranty

- Ta: 50°C
- Ta: 50°C

- 浪涌保护：2kV
- Surge: 2kV

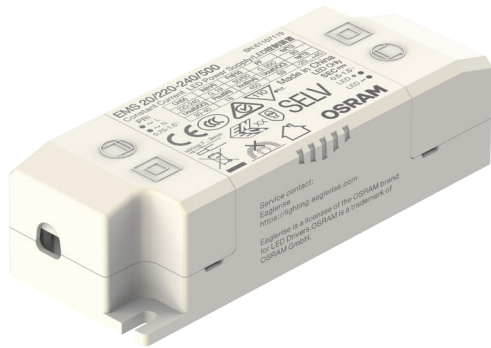

型号 Model	I/N码 Item NO.	功率 Power	输入电压 Input Voltage	输出电流 Output Current	输出电压 Output Voltage	效率 Efficiency	功率因数 Power Factor	尺寸 Size (L*W*H)
EMS 20/220-240/500	61106019	20W	220-240VAC	500mA	27-42V	87%	0.95	103*43*29mm
EMS 25/220-240/600	61106029	25W	220-240VAC	600mA	27-42V	87%	0.95	103*43*29mm
EMS 30/220-240/700	61106039	30W	220-240VAC	700mA	27-42V	87%	0.95	103*43*29mm
EMS 32/220-240/750	61106049	32W	220-240VAC	750mA	27-42V	87%	0.95	103*43*29mm
EMS 33/220-240/800	61106059	33W	220-240VAC	800mA	27-42V	89%	0.95	103*43*29mm
EMS 35/220-240/850	61106069	35W	220-240VAC	850mA	27-42V	89%	0.95	103*43*29mm
EMS 36/220-240/900	61106079	36W	220-240VAC	900mA	27-42V	89%	0.95	103*43*29mm
EMS 38/220-240/950	61106089	38W	220-240VAC	950mA	27-42V	89%	0.95	103*43*29mm
EMS 40/220-240/1000	61106099	40W	220-240VAC	1000mA	27-42V	89%	0.95	103*43*29mm
EMS 42/220-240/1050	61106109	42W	220-240VAC	1050mA	27-40V	90%	0.95	103*43*29mm

EMS LPF系列
EMS LPF Series

- 可适配II类灯具
- For luminaire of protection class II

- 隔离/安全低电压/独立式
- Isolated / SELV / Independent

- 输入电压 220-240VAC
- Input Voltage 220-240 VAC



- 多重保护：短路保护、过载保护、过压保护、过温保护
- Protections: SCP/ OLP/ OVP/ OTP

- 效率高达85%
- Efficiency up to 85%

- 5年质保
- 5 years warranty

- Ta: 45°C
- Ta: 45°C

- 超小尺寸
- Mini Size

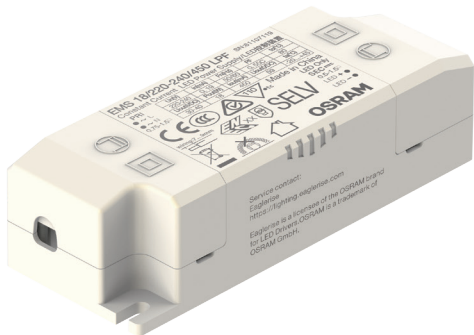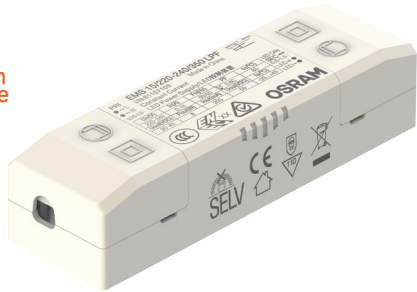


型号 Model	I/N码 Item NO.	功率 Power	输入电压 Input Voltage	输出电流 Output Current	输出电压 Output Voltage	效率 Efficiency	功率因数 Power Factor	尺寸 Size (L*W*H)
EMS 5/220-240/120 LPF	61107029	5W	220-240VAC	120mA	30-40V	80%	0.6	92*28*21mm
EMS 6/220-240/150 LPF	61107039	6W	220-240VAC	150mA	30-40V	80%	0.6	92*28*21mm
EMS 7/220-240/180 LPF	61107049	7W	220-240VAC	180mA	30-40V	80%	0.6	92*28*21mm
EMS 8/220-240/200 LPF	61107059	8W	220-240VAC	200mA	30-40V	80%	0.6	92*28*21mm
EMS 9/220-240/220 LPF	61107069	9W	220-240VAC	220mA	30-40V	80%	0.6	92*28*21mm
EMS 10/220-240/250 LPF	61107079	10W	220-240VAC	250mA	30-40V	82%	0.6	92*28*21mm
EMS 11/220-240/280 LPF	61107089	11W	220-240VAC	280mA	30-40V	82%	0.6	92*28*21mm
EMS 12/220-240/300 LPF	61107099	12W	220-240VAC	300mA	30-40V	82%	0.6	92*28*21mm
EMS 15/220-240/350 LPF	61107109	15W	220-240VAC	350mA	30-40V	82%	0.6	92*28*21mm
EMS 18/220-240/450 LPF	61107119	18W	220-240VAC	450mA	30-40V	85%	0.55	92*36*25mm
EMS 20/220-240/500 LPF	61107129	20W	220-240VAC	500mA	30-40V	85%	0.55	92*36*25mm

配件表
Accessories

侧盖
Side Cap

- 适配机型:
Suitable for:
ITS DALI-2 20/220-240/500 CS
ITS DALI-2 30/220-240/700 CS
ITS DALI-2 42/220-240/1050 CS
ITS DALI-2 60/220-240/1500 CS
ITS FIX 20/220-240/500 CS
ITS FIX 30/220-240/700 CS
ITS FIX 42/220-240/1050 CS
ITS FIX 60/220-240/1500 CS

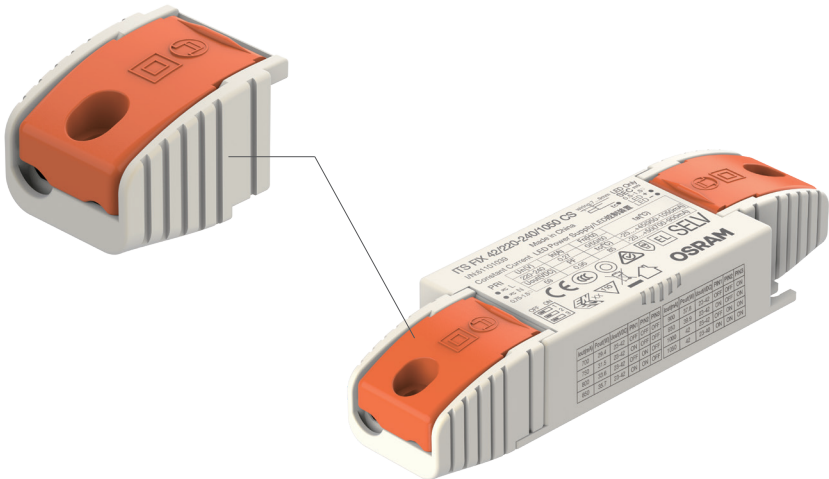

I/N码:
Item NO.:
63101019

牙节
Nipple

- 适配机型:
Suitable for:
ITS FIX 12/220-240/300 CS T-W HE
ITS FIX 12/220-240/300 CS T-B HE
ITS FIX 12/220-240/300 CS T-G HE
ITS FIX 18/220-240/450 CS T-W HE
ITS FIX 18/220-240/450 CS T-B HE
ITS FIX 18/220-240/450 CS T-G HE
ITS FIX 26/220-240/650 CS T-W HE
ITS FIX 26/220-240/650 CS T-B HE
ITS FIX 26/220-240/650 CS T-G HE
ITS FIX 34/220-240/850 CS T-W HE
ITS FIX 34/220-240/850 CS T-B HE
ITS FIX 34/220-240/850 CS T-G HE
ITS FIX 42/220-240/1050 CS T-W HE
ITS FIX 42/220-240/1050 CS T-B HE
ITS FIX 42/220-240/1050 CS T-G HE

尺寸 Size	I/N码 Item NO.
M10*10	63301019
M10*8	63301029

