ITS FIX CS Series LED Power Supply

OSRAM

ITS FIX 42/220-240/1050 CS

42W Constant Current LED driver

Applications

LED panel, LED down light, LED spot light

Approvals

CE CB EL SELV

Housing material: plastic, white
* image for information purpose only

Product Features

- For luminaire of protection class I or II
- Output current range: 700 - 1050 mA
- SELV, Urated: 23 - 42 V
- Built-in / Independent (With side caps)
- Input Voltage：220 - 240 Vac
- Power Factor：0.95 (Typ.)
- Efficiency up to 90 %
- Suitable for emergency lighting acc. to EN 50172
- Adjustable Output Current with DIP switch
- Ta range: -20 ... +45 ℃ @ 950 - 1050 mA; -20 ... +50 ℃ @ 700 - 900 mA
- Surge capability: 2 kV
- 5 years guarantee
- Protection: SCP / OLP / OVP / OTP

Electrical specification

Input

Item	Value
Rated input voltage (V)	220 - 240 V
Range of input voltage (AC)	198 - 264 Vac
Range of input voltage (DC)	176 - 280 Vdc
Maximum voltage	300 Vac @ 1h maximum, the unit may not operate under this abnormal condition
Input Current Max.	0.27 A
Frequency	0 / 50 / 60 Hz
Total Harmonic Distortion (THD)	< 10 % @ Full load, 230 Vac, 50 Hz. See graphs
Power factor	0.95 @ Full load, 230 Vac, 50 Hz. See graphs
Displacement Factor	≥ 0.9 @ Full load, 230 Vac, 50 Hz
Start-up time (AC)	< 0.5 s
Start-up time (DC)	< 0.6 s
Switch over time (AC / DC mode)	< 0.6 s
No-load power	≤ 0.5W @ 220 Vac

Output

Item	Value
Constant Current	700 - 1050 mA
Voltage Range	23 - 42 Vdc @ 700 - 1000 mA; 23 - 40 Vdc @ 1050 mA
Unload voltage Max.	59 Vdc
Current accuracy	± 5 %
Output current ripple (≤ 120 Hz)	± 3 %
Output power range	16.1 - 42 W
SVM	≤ 0.4 @ Full load, 230 Vac
Pst	≤ 1 @ Full load, 230 Vac
Efficiency	90 % @ Full load, 230 Vac, 50 Hz. See graphs
EOFi	100 %
Galvanic isolation	SELV

Protection

Item	Value
Over Load Protection	103 - 130 % / Auto recovery
Over Voltage Protection	59 Vdc / Auto recovery
Short Circuit Protection	Auto recovery
Over Temperature Protection	Auto recovery

Surge capability

Item	Value
Surge capability (L - N)	2 kV
Surge capability (L / N - Ground)	2 kV

Withstand voltage

Item	Value
Input - Output	3750 V / 5 mA / 60s

Environment

Item	Value
Ambient temperature range ta	-20 ... +50 ℃ @ 700 - 900 mA; -20 ... +45 ℃ @ 950-1050mA
Maximum case temperature tc	85 ℃
Storage temperature range	-40 ... +85 ℃
Lifetime	> 100,000 h @ tc=70 ℃ > 50,000 h @ tc=80 ℃
Noise	≤ 20 dB(A) @ 20 cm
Max. case temperature in fault condition	110 ℃
Humidity	20 % - 90 % RH
IP protection class	IP 20
Mains switching cycles	> 25000 cycles
Max. cable length to lamp / LED module	2 m

Dimension

Item	Value
Length	97 mm (Withstand side caps: 144.6 mm)
Width	43 mm
Height	25 mm

Output technical parameter

Number	Current (mA)	Voltage (Vdc)	Power (W)	PIN1	PIN2	PIN3	Ambient temperature range ta
1	700 mA	23-42 Vdc	29.4 W	--	--	--	-20 ... +50 ℃
2	750 mA	23-42 Vdc	31.5 W	ON	--	--	-20 ... +50 ℃
3	800 mA	23-42 Vdc	33.6 W	--	ON	--	-20 ... +50 ℃
4	850 mA	23-42 Vdc	35.7 W	ON	ON	--	-20 ... +50 ℃
5	900 mA	23-42 Vdc	37.8 W	--	--	ON	-20 ... +50 ℃
6	950 mA	23-42 Vdc	39.9 W	ON	--	ON	-20 ... +45 ℃
7	1000 mA	23-42 Vdc	42 W	--	ON	ON	-20 ... +45 ℃
*8	1050 mA	23-40 Vdc	42 W	ON	ON	ON	-20 ... +45 ℃

* Factory default

Inrush Current & Circuit Breaker

I_{peak}	T_{width}	B10	B16	B20	C10	C16	C20
24.1 A	122 µs	28 pcs	45 pcs	57 pcs	29 pcs	47 pcs	59 pcs

Notes:

1. The values in the table are the maximum number of drives that can be connected to each type of MCB. Do not exceed these values during installation.
2. The allowable number may vary slightly depending on the brand and model of the miniature circuit breaker (MCB).
3. Ipeak = peak inrush current; Twidth = half-peak pulse width. See the figure below for the waveform.

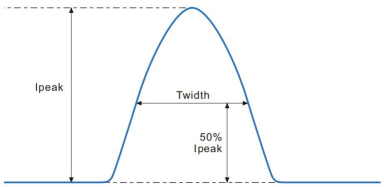

2D diagram

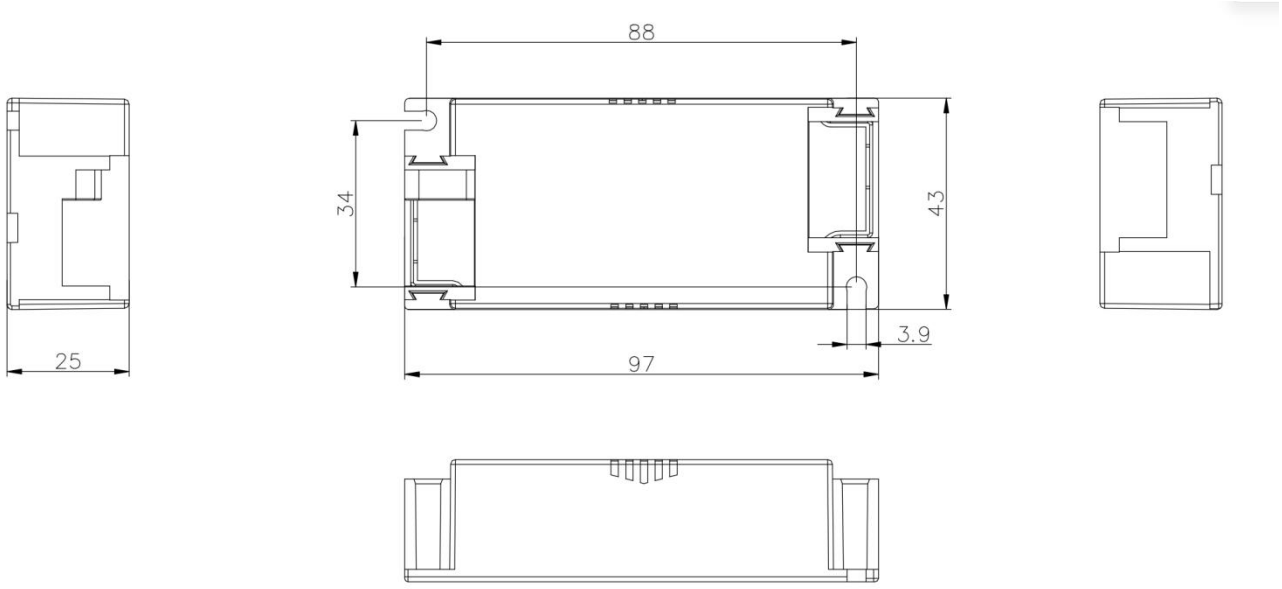

With side caps

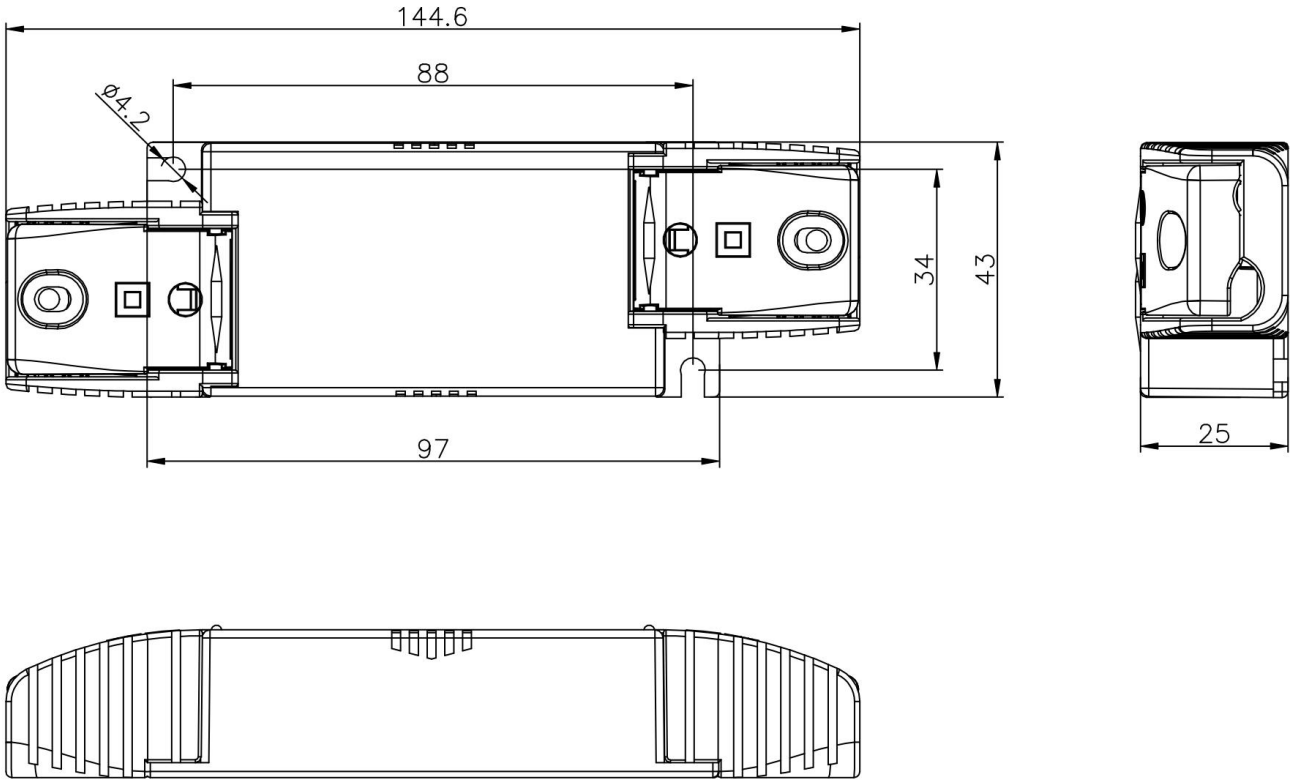

Wiring diagram

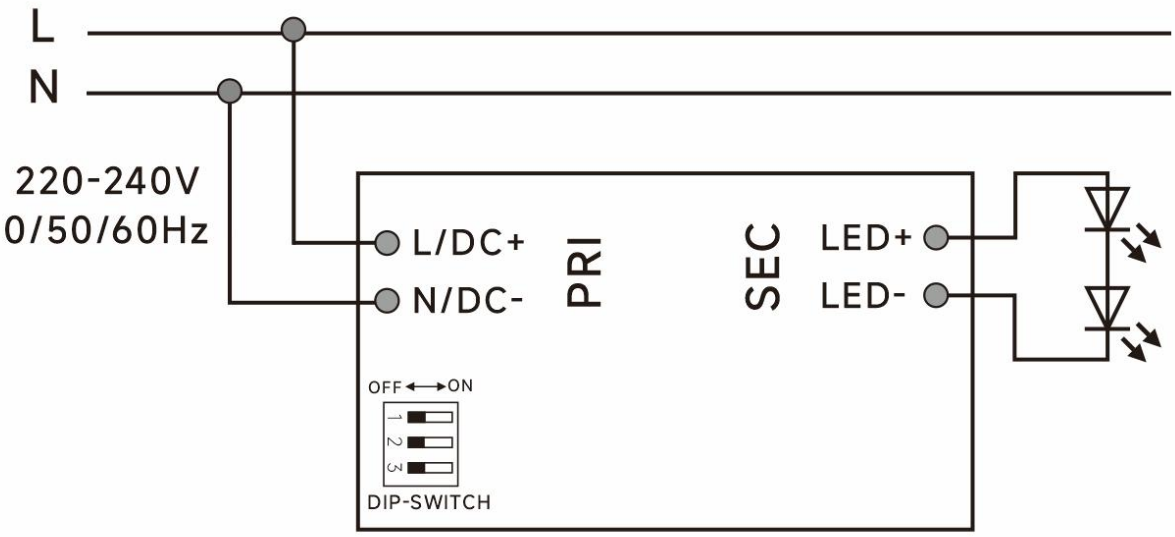

Notes:

- To ensure good EMC conditions, the output cables of the LED driver should be routed separately from the mains input connections and mains cables.
- LED wiring should be kept as short as possible to ensure good EMC performance. The max.cable length to lamp / LED module is 2 m.
- To comply with EMC regulations, the secondary side wires (connecting to the LED module) shall be routed in parallel.
- The LED driver does not provide reverse polarity protection on the secondary side. Reverse polarity may damage LED modules that lack reverse polarity protection.
- Wrong wiring may cause malfunction or irreparable damage to the LED driver.

Wiring & Connections

Specification item	Value(Unit)	
Input wire cross-section	For built-in use	s: 0.5 ... 1.5 mm^2 f: 0.75 ... 1.5 mm^2
	For independent use	0.75 ... 1.5 mm^2
Input wire strip length	7 ... 9 mm	
Output wire cross-section	0.5 ... 1.5 mm^2	
Output wire strip length	7 ... 9 mm	

"s" stands for solid wire, "f" stands for multi-stranded wire.

Recommended wire

Wire cross-section	Wire type
2*0.5 mm^2	H03VVH2-F 2core
2*0.75 mm^2	H03VVH2-F 2core
1.5 mm^2	CCC 08 (RV-90)
16AWG (1.25 mm^2)	UL1015

Strip the wire insulation to 7 - 9 mm before connecting to the driver terminals. This ensures proper electrical contact and avoids short circuits caused by exposed conductors. Only one wire per terminal.



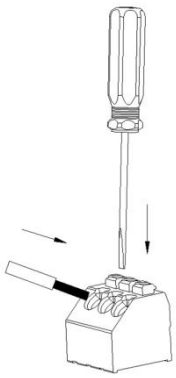

Expected lifetime

Output current	ta (℃)	30	35	40	45	50
1050 mA	tc (℃)	68	72	75	80	83
	Lifetime	>100,000 h	>95,000 h	>75,000 h	>55,000 h	>40,000 h

1. The LED driver achieves the above-specified lifetime under reference operating conditions.
2. The correlation between case temperature tc and ambient temperature ta is also affected by luminaire design.

Electrical characteristics

Efficiency vs. Load

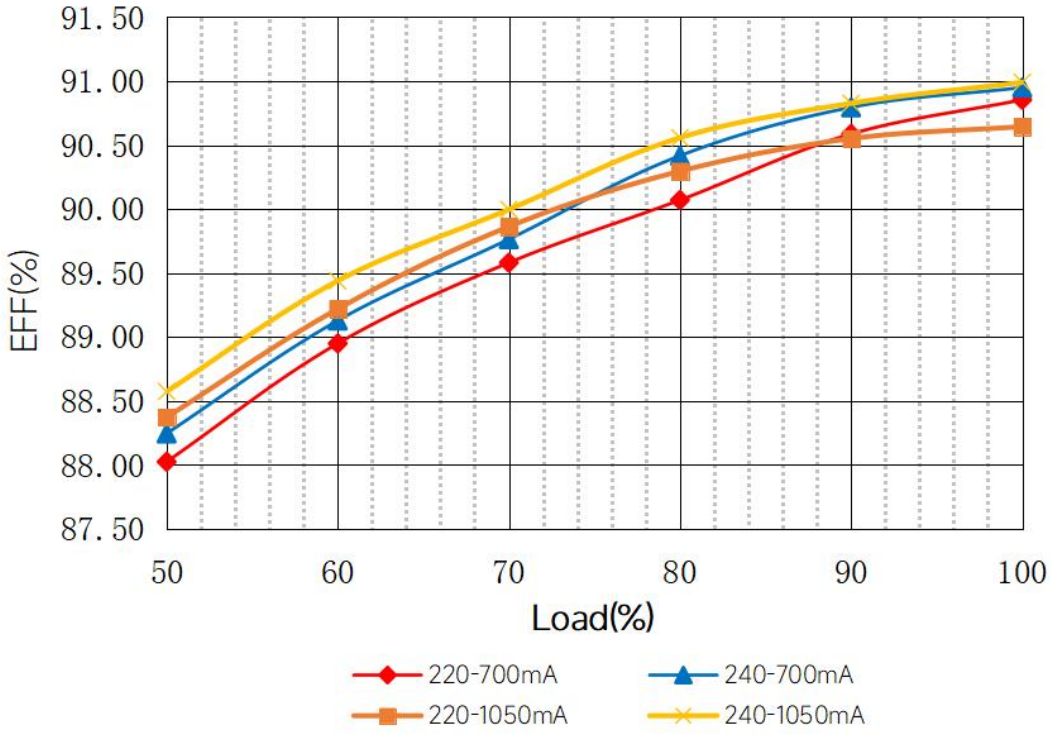

Power Factor Characteristics

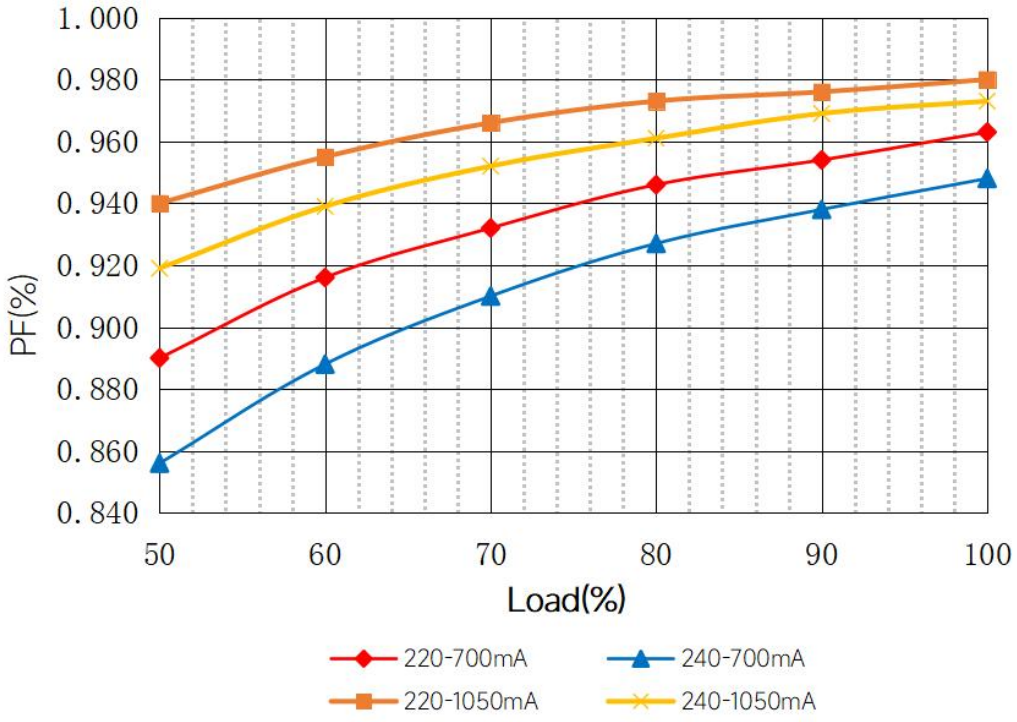

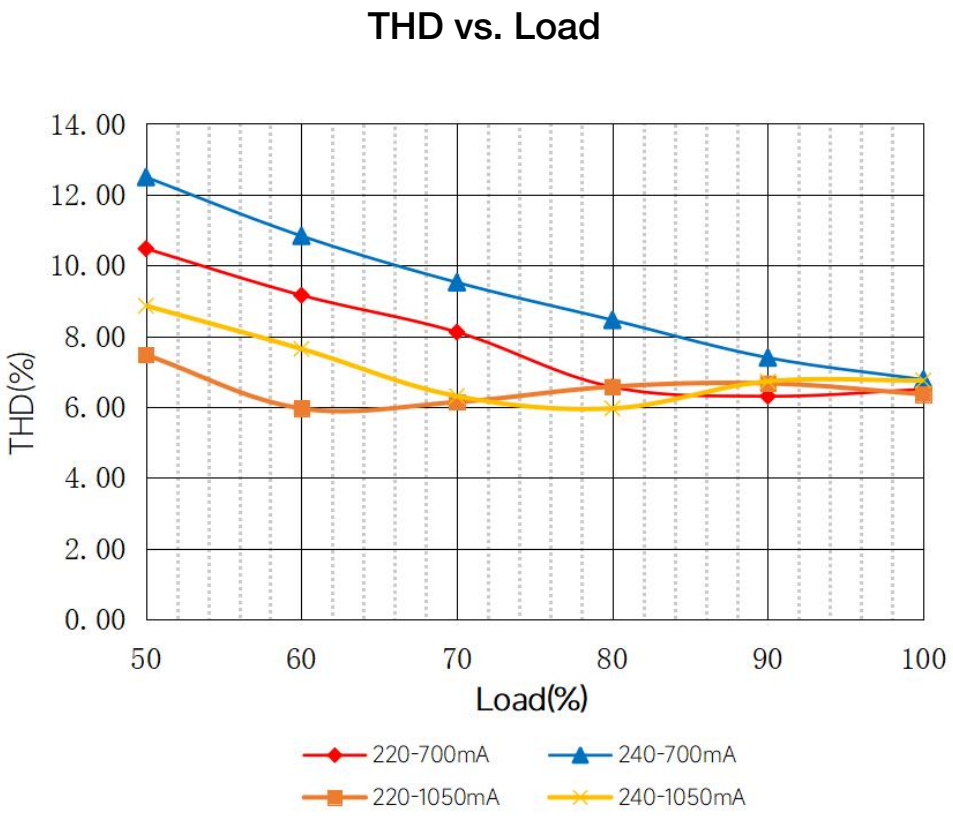

Operating window

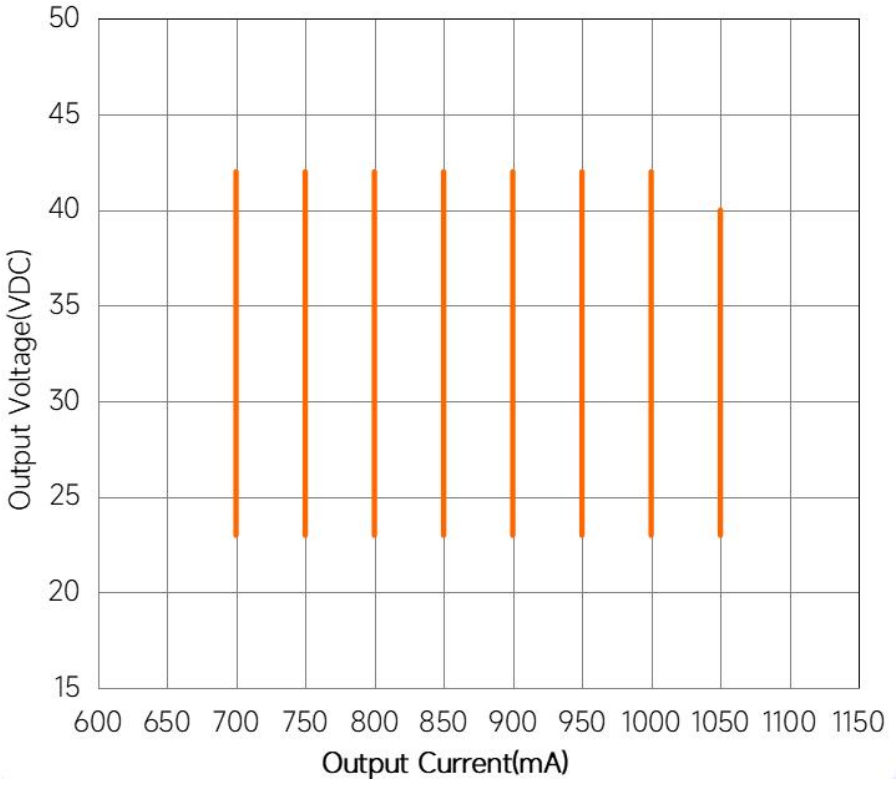

Remarks

- All parameters not specially mentioned are measured at 230 Vac input , full load and 25 ℃ of ambient temperature.
- Ripple & Noise are measured at 20 MHz of bandwidth by using a 300 mm twisted pair-wire terminated with a 0.1 µF & 47 µF parallel capacitor.
- EL compatible with IEC 61347-2-13 Annex J, compatible with EN 60598-2-22 emergency lighting fixtures, compatible with EN 50172 central battery system applications.
- The DC input for this product is only used for emergency lighting and applies to functional and safety requirements，EMC is not considered.
- The driver withstands an input voltage of up to 300 Vac for maximum 1 hour. Shut down of output load might occur in case the supply voltage exceeds the declared input voltage range.
- Shut down of output load happens if the input voltage of the load is below the minimum allowed voltage level.
- Hot plugging of the load or external switching on the secondary side is not permitted.
- Output short circuit protection: If the LED output is short-circuited, the driver shuts down output; normal operation resumes automatically after fault is removed.
- Output over load protection: The driver shuts off the output if the load exceeds the internal preset limit. If the overload persists after restart, the driver shuts down again. Normal operation resumes automatically after the fault is removed.
- Output over voltage protection: If the output voltage exceeds the specified limit, the driver shuts down the output, and automatically returns to normal after the fault is removed.
- Output over temperature protection: The over-temperature protection of the product is provided by the IC. If the temperature exceeds the preset limit, the driver reduces the output current and resumes normal operation after temperature drops.

Packaging information

Item NO.(I/N)	Product name	Weight /piece (kg)	Outer carton dimensions (mm)	Quantity /carton	Net weight /carton (kg)	Gross weight /carton (kg)
61101039	ITS FIX 42/220-240/1050 CS	0.09	240 x 219 x 175	50	4.5	4.99

Standards

GB 19510.1
GB 19510.213
IEC 61347-1
IEC 61347-2-13
EN 61347-1
EN 61347-2-13
AS/NZS 61347.1
AS 61347.2.13
EN 62384
GB/T 17743
GB 17625.1
EN 55015
EN 61000-3-2
EN 61000-3-3
EN 61547
EN 62493
EN 61000-4-2, -3, -4, -5, -6, -8, -11
Erp2.0 EU 2019/2020
RoHS (2011/65/EU) (EU)2015/863

Eaglerise is a licensee of the OSRAM brand for
General Lighting LED drivers.
OSRAM is a trademark of OSRAM GmbH.