30W constant Voltage-US Series



Features

- For luminaries of protection Class II, SELV, Independent
- Input Voltage: 220-240VAC
- Protections: SCP/OLP/OVP/OTP
- Power Factor: 0.95 (Typ.)
- Efficiency: ≥87% (Typ.)
- 5 years warranty

Applications


- LED strips

■Approve

◆ Description

US-30-XX LI EXC S is a 30W constant voltage LED driver that operates from 198-264Vac input with 12/24/48V output voltage. With it's dimensions from 154X50X14mm, it is easy to integrate in LED strips products. To ensure trouble-free operation, protection is provided against output short circuit, over load, over voltage and over temperature.

◆ Model code

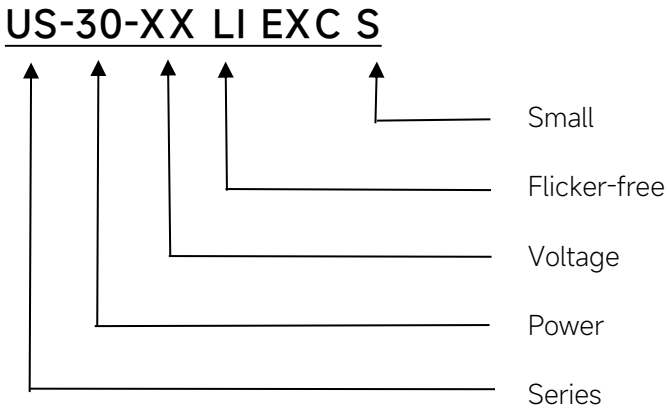


◆ Specification

Output	Constant Voltage	12VDC	24VDC	48VDC
	Current Range	0-2.5A	0-1.25A	0-0.625A
	Voltage Accuracy	±5%		
	Output LF current ripple(≤120Hz)	±3%		
	SVM	≤0.4@Full load,230V		
	Pst	≤1@Full load,230V		
	Efficiency(Typ.)	≥88%@Full load,230V	≥87%@Full load,230V	≥88%@Full load,230V
Input	Rated input voltage	220-240V		
	Range of input voltage	198-264VAC		
	Maximum voltage	300VAC@1 h maximum,unit might not operate in this abnormal condition		
	Frequency(Hz)	50/60 Hz		
	Displacement factor	≥0.9@Full load,230V		
	Power Factor	0.95@Full load,230V		
	Input Current max	0.2A		
	Start-up time	< 0.5S		
	No Load Power	≤0.5W		
	THD (Typ.)	< 10%@Full load,230V		
Protection	Over Load Protection	105-150%		
		YES/Auto Resume		
	Over Voltage Protection	> 12.6V	> 25.2V	> 50.5V
		YES/Auto Resume		
	Short Circuit Protection	YES/Auto Resume		
	Over Temperature Protection	YES/Auto Resume		
Capability	Surge capability (L-N)	2KV		
	Surge capability (L/N-Ground)	NA		
Withstand voltage	Input-Output	3750V/5mA/60S		
Environment	Operating Temperature	-20℃~+45℃		
	Humidity	20%-90%RH		
	Tc	80℃		85℃
	Storage Temperature	-20℃~+85℃		
	Life time	> 50000h@Tc=80℃		
	Noise	≤25dB(A)@10cm		
Surface	Dimension	154X50X14(LXWXH)mm		
	material	PC		
Standards	Safety	GB/T 19510. 1, GB/T 19510. 213; IEC 61347-1, IEC 61347-2-13; EN 61347-1, EN 61347-2-13; EN 62384		

	EMC	GB/T17743, GB17625. 1;EN55015, EN61000-3-2, EN61000-3-3, EN61547;EN61000-4-5;EN61000-4-2,3,4,5,6,8,11, EN61547
	Energy Efficiency	Erp2.0 EU 2019/2020
	RoHS	RoHS (2011/65/EU) (EU)2015/863
Note	1.All parameters NOT specially mentioned are measured at 240VAC input , full load and 25℃ of ambient temperature. 2.Ripple & Noise are measured at 20MHz of bandwidth by using a 300mm twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor. 3.Switch and dimmer are not recommended to connect between this product output and luminaries. 4.The efficiency testing will be affected by the instrument used and the results may also be different. 5.EL compatible with IEC 61347-2-13 Annex J, compatible with EN 60598-2-22 emergency lighting fixtures, compatible with EN 50172 central battery system applications. 6.All Eaglerise power supply are complied with EMI regulations. Since they are belong to component and will be installed inside system enclosure. When they are integrated into a system, the EMI characteristics of the system must be re-verified again.	


◆ Inrush Current

I_{peak}	Twidth	B10	B16	B20	C10	C16	C20
19.7A	148μs	28pcs	45pcs	57pcs	40pcs	64pcs	80pcs

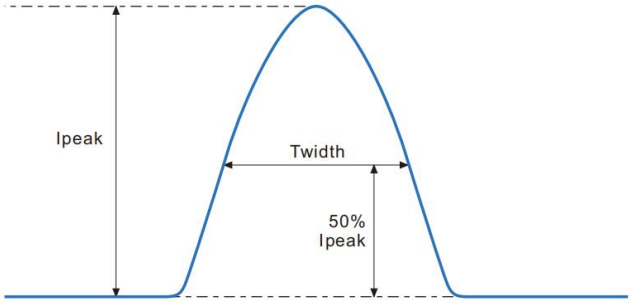


Remarks:
1.The number of drives mounted under different MCBs in the table is the maximum value. Please do not exceed this number during installation.
2.Different brands and models of miniature circuit breakers, the number of drives mounted will be slightly different.

◆ Wiring diagram

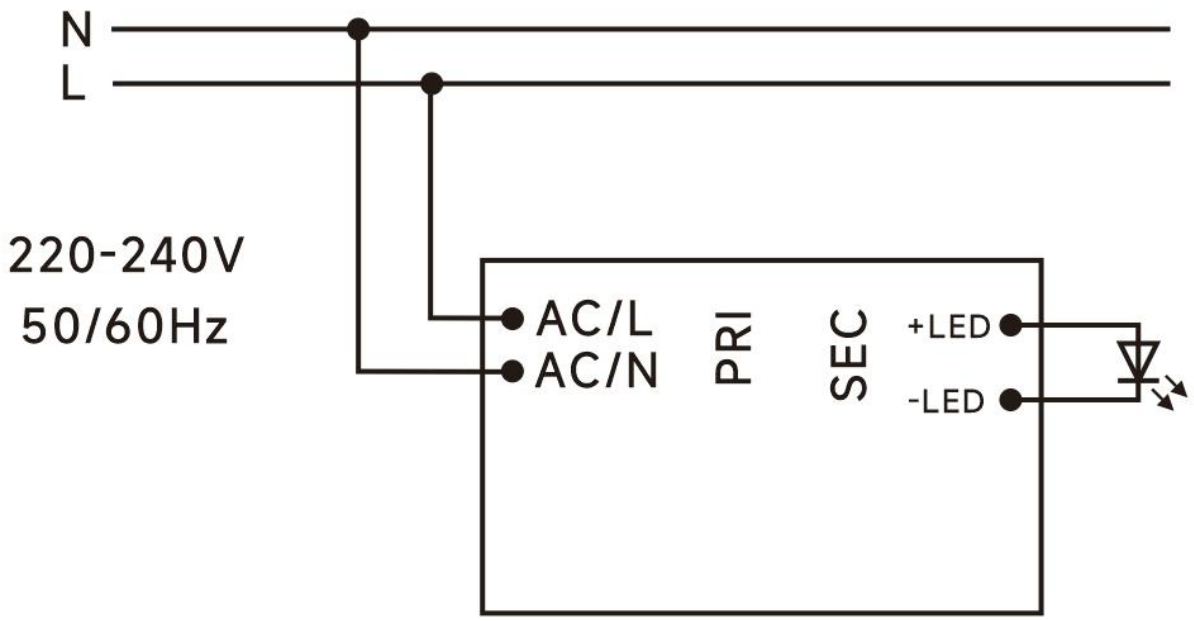

◆ 2D diagram

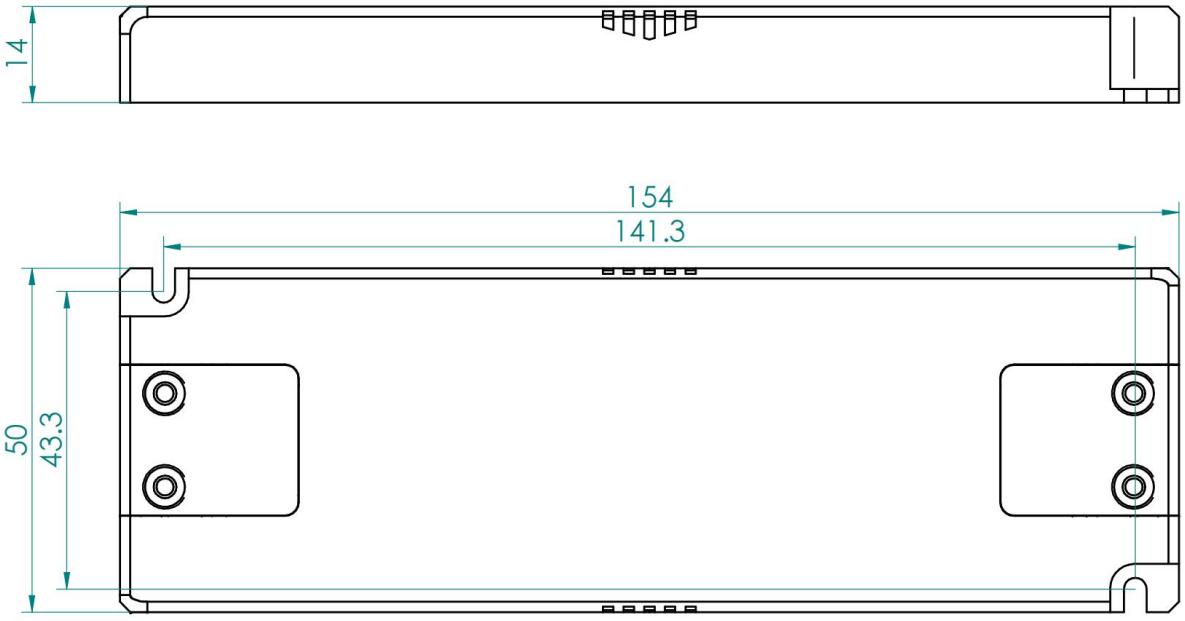

◆ Wiring & Connections

Specification item		Value （Unit ）
Input	Input wire cross-section	0.5...1.5 mm^2
	Input wire gauge.	16...20 AWG
	Input wire strip length	7...9mm
Output	Output wire cross-section	0.5...1.5 mm^2
	Output wire gauge.	16...20 AWG
	Output wire strip length	7...9mm

◆ Recommended wire

Wire cross-section	Wire type
2*0.5mm^2	H03VVH2-F 2core
2*0.75mm^2	H03VVH2-F 2core
1.5mm^2	CCC 08(RV-90)
16AWG(1.25mm^2)	UL1015


Note:Solid wire is risky to use on an angled terminal.Stranded wire is recommended for this kind of use.

◆ Packaging


Model	Product Dimensions(mm)	weight/ piece(Kg)	Outer carton dimension(mm)	Quantity/carton	Net weight/carton(Kg)	Gross weight/carton(Kg)
US-30-XX LI EXC S	154x50x14	0.1	315X225X150	64	6.4	7

◆ Curve for US-30-24 LI EXC S


Lifetime vs. Temperature Curve

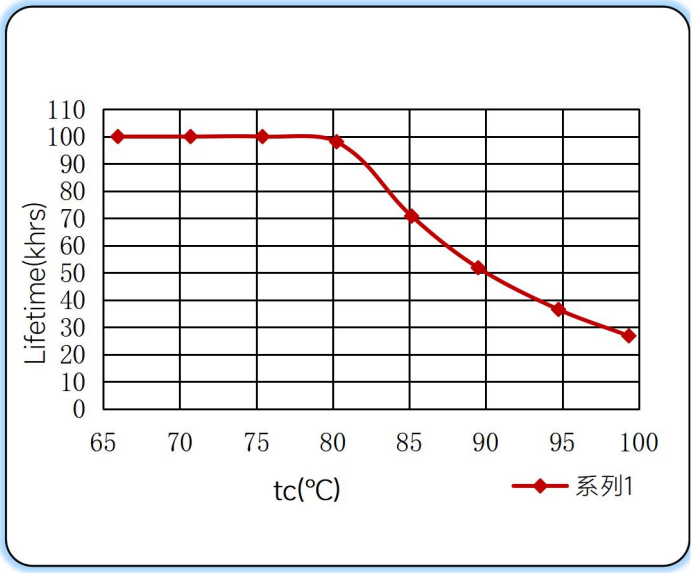


Efficiency vs. Load

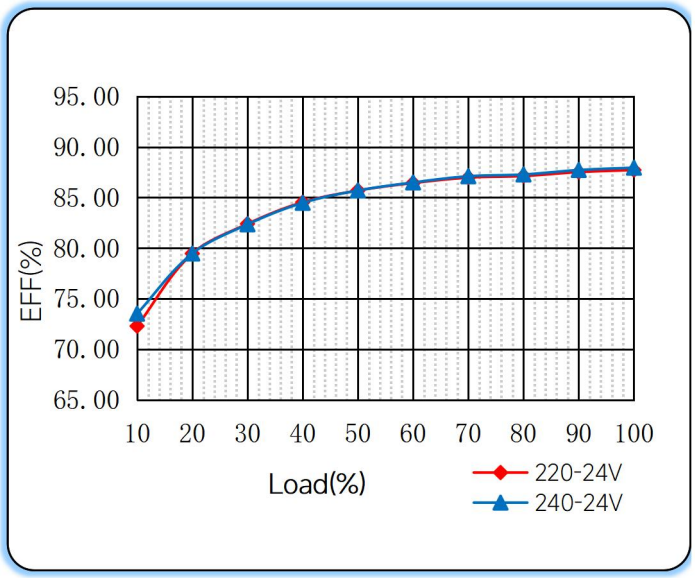


Power Factor Characteristics

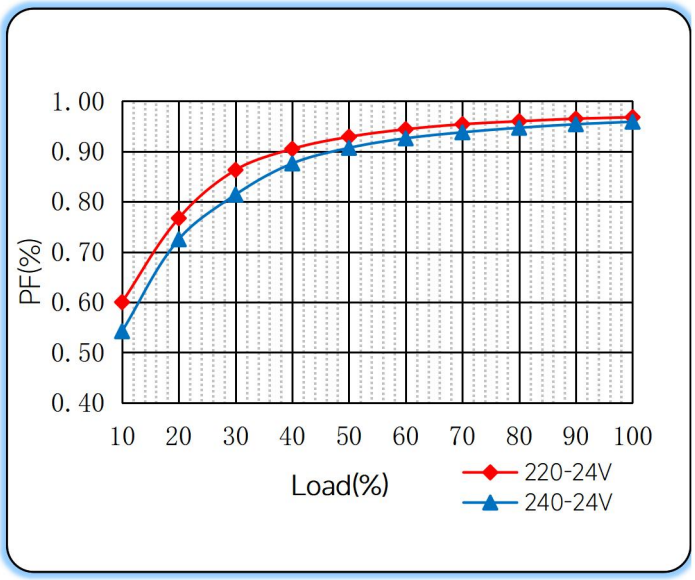

THD vs. Load

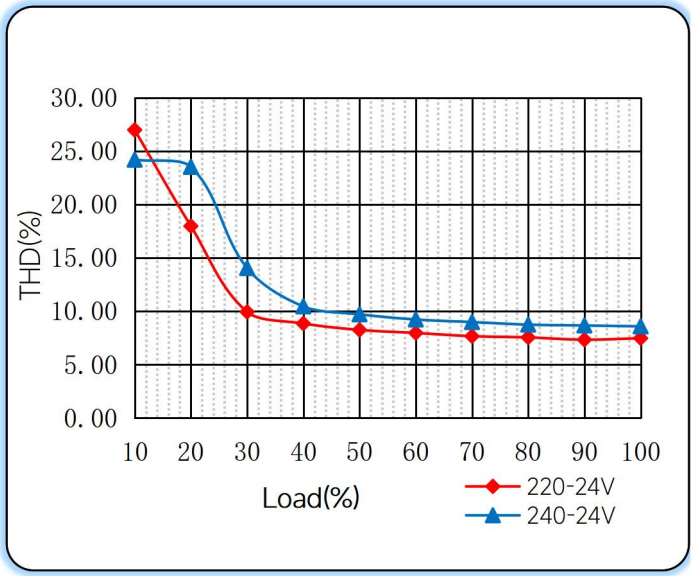

◆ Operating window

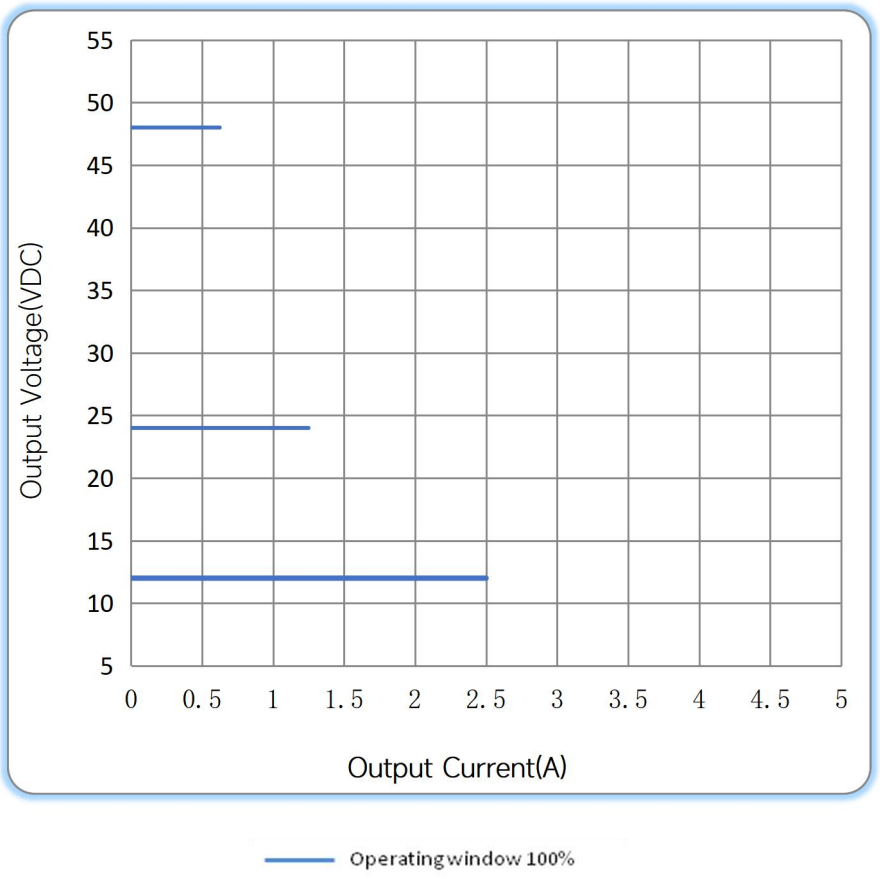

◆ Revision Updates

ITEM	BEFORE	AFTER	VERSION	DATE
Initial			A	2026/02/25
Noise	≤20dB(A)@10cm	≤25dB(A)@10cm	B	2026/09/09
Tc	80℃	85℃	C	2026/11/10

Remark:The final interpretation of the contents of the specification belongs to Eaglerise Electric & Electronic (China) Co., Ltd.

Tel: +86-0757-86256822, +86-0757-86256831
E-mail: sales@eaglerise.com
Website : https://lighting.eaglerise.com

EAGLERISE Manual